




your reliable partner

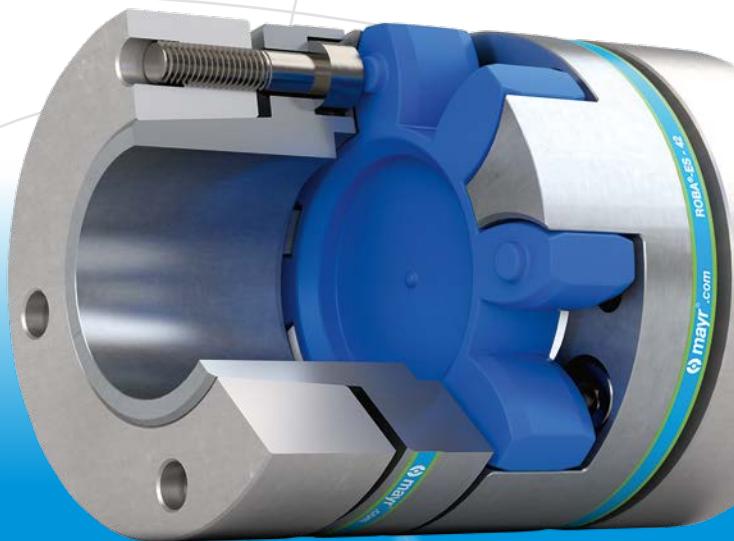

ROBA[®]-ES

K.940.V16.EN

[www.mayr[®].com](http://www.mayr.com)

We safeguard the movements of this world



The Christian Mayr mill-construction business – founded in 1897.



Communications centre mayr.com – Opened 2018.

mayr®
your reliable partner

2

Specialists in power transmission for more than a century


mayr® power transmission is one of the most traditional and yet most innovative German companies in the field of power transmission. From modest beginnings in the year 1897, the family enterprise from the Allgäu region has developed into the world market leader. Today, 700 employees work at the headquarters in Mauerstetten; more than 1200 employees work for the company worldwide.

An unsurpassed standard product range

mayr® power transmission offers a variant variety of torque limiters, safety brakes, backlash-free shaft misalignment compensation couplings and high-quality DC drives. Regarding customer-specific requirements, too, the company possesses the expertise to develop customized and economical solutions. This is why numerous renowned machine manufacturers trust in holistic solutions by *mayr®* power transmission.

Represented worldwide

With eight subsidiaries in Germany, sales offices in the USA, France, Great Britain, Italy, Singapore and Switzerland as well as 36 additional country representatives, *mayr®* is available in all important industrial areas, guaranteeing optimum customer service around the globe.

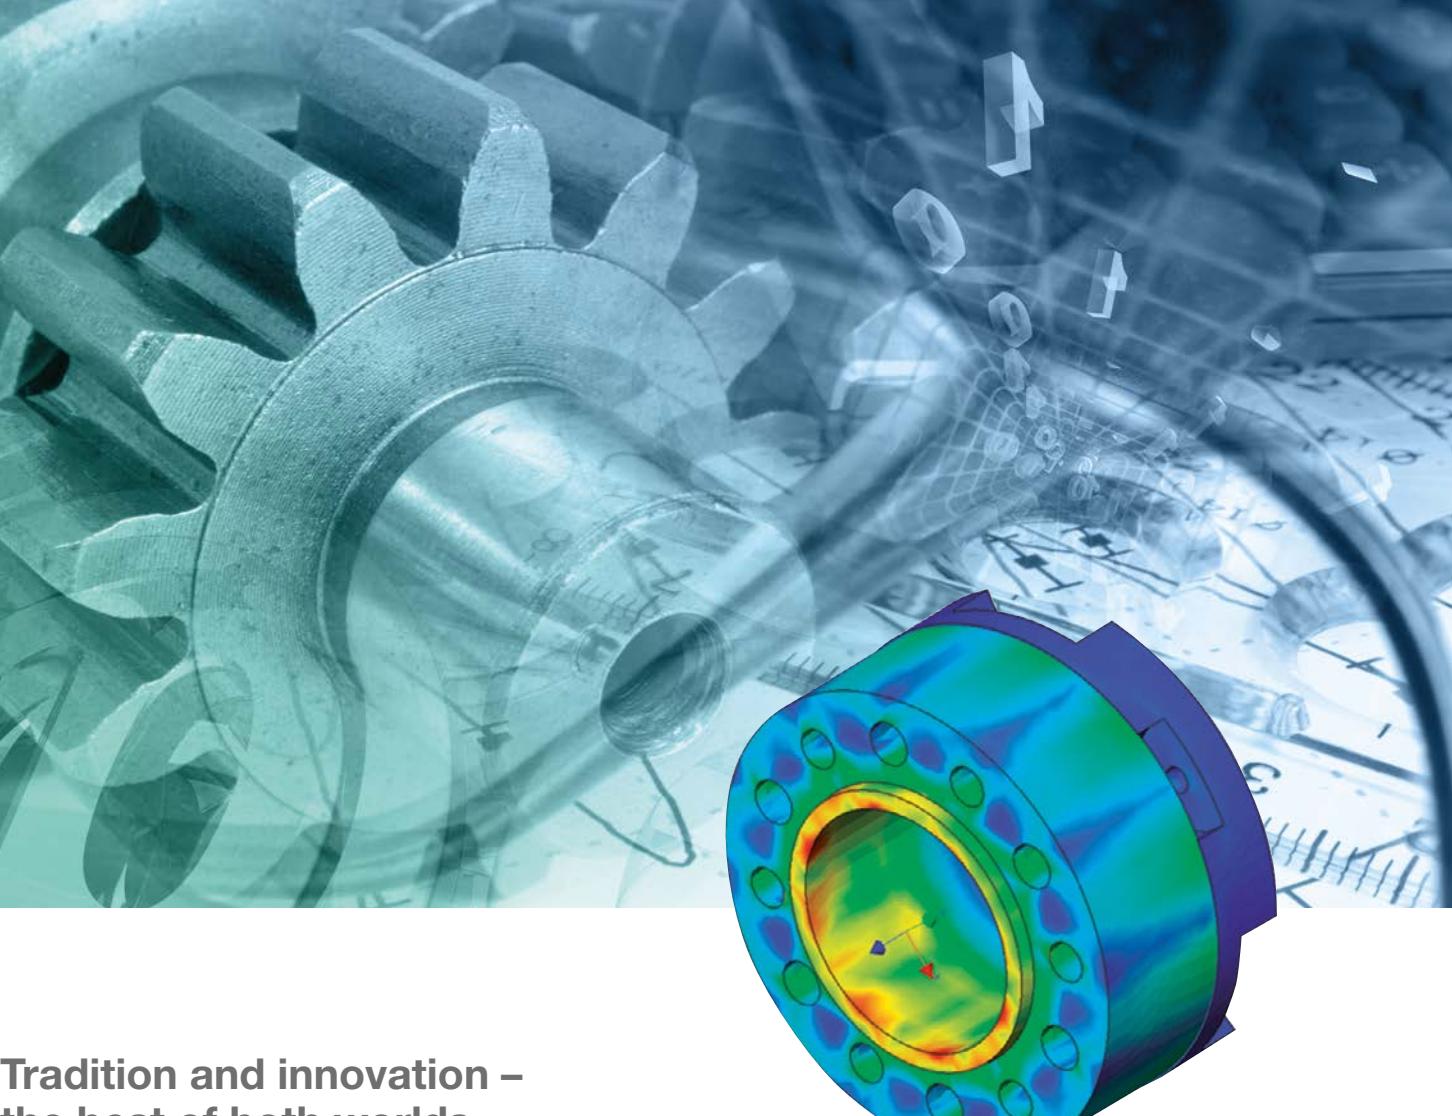

Tradition and innovation – the best of both worlds

Tradition and innovation do not contradict each other - on the contrary. They are the two supporting pillars which have guaranteed stability and reliability for generations. Long-term stability, independence as well as a good reputation and satisfied customers are important values for a family enterprise rich in tradition.

Therefore, we place emphasis on:

- Tested product quality,
- Optimum customer service,
- Comprehensive know-how,
- Global presence,
- Successful innovations and
- Effective cost management.


By pursuing our own objective of always offering our customers the technologically most advanced and most economical solution, we have been able to gain the trust of many leading industrial companies from all branches and from all over the world as a reliable partner.

Place your trust in our know-how and our more than 50 years of experience in the areas of torque limiters, safety brakes and shaft couplings.

ROBA®-ES

Backlash-free elastomer coupling

- **Vibration damping**
- **Damping behaviour can be selected through elastomeric elements in different Shore hardnesses**
- **Backlash-free torque transmission through pre-tensioned elastomeric element**
- **Compensation of shaft misalignments**
- **Plug-in connection, therefore suitable for blind assembly**
- **Maintenance-free, media-resistant, temperature-stable**
- **Torsionally flexible on a small scale, but two to four times more rigid than toothed belt drives.**

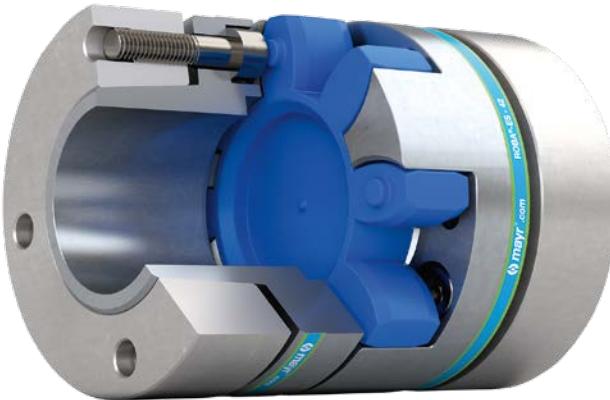

ROBA®-ES Elastomeric Elements

The elastomeric elements are the central element of the ROBA®-ES-coupling. They define the application field as well as the shaft connection behaviour via the permitted torque, the rigidity, the damping and the misalignment values.

By using a unique polyurethane material and a special injection procedure, it is possible to achieve a high dimensional accuracy and evenness in the teeth of the elastomeric element.

The elastomeric elements are available in different shore hardnesses. The teeth of the elastomeric element are chamfered at the sides. This makes blind assembly easier.

The ambient temperatures present during operation have a considerable effect on the dimensioning of a ROBA®-ES-coupling (see Dimensioning page 22).

Agent Resistance

The elastomeric elements are very resistant against

- pure mineral oils (lubricating oils)
- and anhydrous greases.

They have a similar resistance against fuels such as

- regular-grade petroleum
- diesel oil
- kerosene.

Damage may occur after longer exposure to

- alcohols or
- aromatic fuels (super/four star petrol).

The elastomeric element material used is resistant to hydrolysis. In contrast to other polyurethane materials, water (including sea water) causes, even after years of exposure, no particular changes to the mechanical characteristics. Hot water, however, reduces the mechanical strength.

Dimensioning

The characteristics of ROBA®-ES couplings can be greatly varied by using different elastomeric elements. Due to different damping characteristics and the non-linear rigidity of the elastomer, this element also offers more parameters than the steel shaft connection, which should be taken into account on selection.

We therefore recommend careful, thorough coupling dimensioning (see Dimensioning page 22).



ROBA®-ES couplings are also available in ATEX design according to the directive 2014/34/EU.

ROBA®-ES Contents

Designs

ROBA®-ES with key hubs

- Single-jointed coupling
- Double-jointed coupling short
- Double-jointed coupling with sleeve

ROBA®-ES couplings are delivered as un-bored hub design (further processing to be carried out customer-side) or with a finish bore and keyway JS9 (DIN 6885/1). An adjusting screw is located in the hub for axial securing. Up to Size 38, the hubs are made of aluminium. From Size 42, they are made of steel. Conventional bores can be delivered from stock.



Page 8

ROBA®-ES with clamping hubs

- Single-jointed coupling
- Double-jointed coupling short
- Double-jointed coupling with sleeve

ROBA®-ES couplings with clamping hubs are conceived for fast and safe installation or de-installation. They have no keyway. The tightening torque (T_A) on the clamping screws must be maintained in order to ensure reliable, frictionally-locking torque transmission.

Please observe the maximum permitted torques (Page 28).

Up to Size 38, the hubs are made of aluminium. From Size 42, they are made of steel.

The clamping hub can be designed with an additional keyway on request.



Page 10

ROBA®-ES with clamping hubs Compact

- Single-jointed coupling
- Double-jointed coupling short
- Double-jointed coupling with sleeve

ROBA®-ES couplings with clamping hubs are conceived for fast and safe installation or de-installation. They have no keyway. The tightening torque (T_A) on the clamping screws must be maintained in order to ensure reliable, frictionally-locking torque transmission.

Please observe the maximum permitted torques (Page 28).

The hubs are made of aluminium. The clamping hub can be designed with an additional keyway on request.

Due to the compact construction of the short clamping hubs, the couplings can be used in constricted installation conditions



Page 12

ROBA®-ES with split clamping hubs

- Single-jointed coupling
- Double-jointed coupling short
- Double-jointed coupling with sleeve

ROBA®-ES couplings with split clamping hubs are conceived for fast and safe installation or de-installation. Due to the orientation of the half-shells in the same direction, radial assembly/disassembly of the coupling is possible at stationary shaft ends. The tightening torque (T_A) on the clamping screws must be maintained in order to ensure reliable, frictionally-locking torque transmission.

Please observe the maximum permitted torques (page 29).

Up to Size 38, the hubs are made of aluminium. From Size 42, they are made of steel. The split clamping hub can be designed with an additional keyway on request.



Page 14

ROBA®-ES with aluminium shrink disk hubs

- Single-jointed coupling
- Double-jointed coupling short

On this design, the hub body is made of aluminium and the ring of phosphated, annealed steel. The design is constructionally identical to the P-design (page 19). The symmetry, the absence of keyways and radial bores produces an optimum shaft run-out. Therefore, much higher speeds are possible compared to the other hub designs (please observe Diagram 1 "Balancing the shrink disk hub", page 31).

The torque is transmitted via frictional locking onto the shaft.

Please observe the maximum permitted torques (page 27).



Page 16

ROBA®-ES with steel shrink disk hubs

- Single-jointed coupling
- Double-jointed coupling short

On this design, the hub body is made of steel (oiled) and the ring of phosphated, annealed steel. This design is available in a standard variant and a variant according to DIN 69002. The DIN variant has an elastomeric element with a central, standardised bore and standardised bore diameters in the hubs. The DIN variant is conceived for use in short bore spindles and multi-spindle heads. Because of the steel hubs, this DIN design combines robustness with precision. This design should be selected in preference to others, in particular on applications with heavily pulsating or alternating loads.

Please observe the maximum permitted torques (page 27).



Page 18

ROBA®-ES with expansion hub and clamping hub

- Single-jointed coupling

ROBA®-ES couplings with an expansion hub have been designed for frictionally-locking torque transmission onto hollow shafts. The expansion hubs are combined with clamping hubs on the opposite side as a standard measure. Other combinations with other hubs are conceivable.

The stated diameters of the expansion hubs are preferred dimensions.

Other diameters can be requested at *mayr®* power transmission.

Please observe the maximum permitted torques (page 29).



Page 20

Coupling Dimensioning

Page 22

Technical Explanations


Page 24

Size	Torques							
	Elastomeric element hardness 80 Sh A (blue)		Elastomeric element hardness 92 Sh A (yellow)		Elastomeric element hardness 98 Sh A (red)		Elastomeric element hardness 64 Sh D (green)	
	T _{KN} [Nm]	T _{K max} [Nm]	T _{KN} [Nm]	T _{K max} [Nm]	T _{KN} [Nm]	T _{K max} [Nm]	T _{KN} [Nm]	T _{K max} [Nm]
14	4	8	8	16	13	26	16	32
19	5	10	10	20	17	34	21	42
24	17	34	35	70	60	120	75	150
28	46	92	95	190	160	320	200	400
38	95	190	190	380	325	650	405	810
42	125	250	265	530	450	900	560	1120
48	150	300	310	620	525	1050	655	1310
55	200	400	410	820	685	1370	825	1650
65	450	900	900	1800	1040	2080	1250	2500

Technical Explanations (transmittable torques)

Page 27


ROBA®-ES elastomer couplings Type 94...

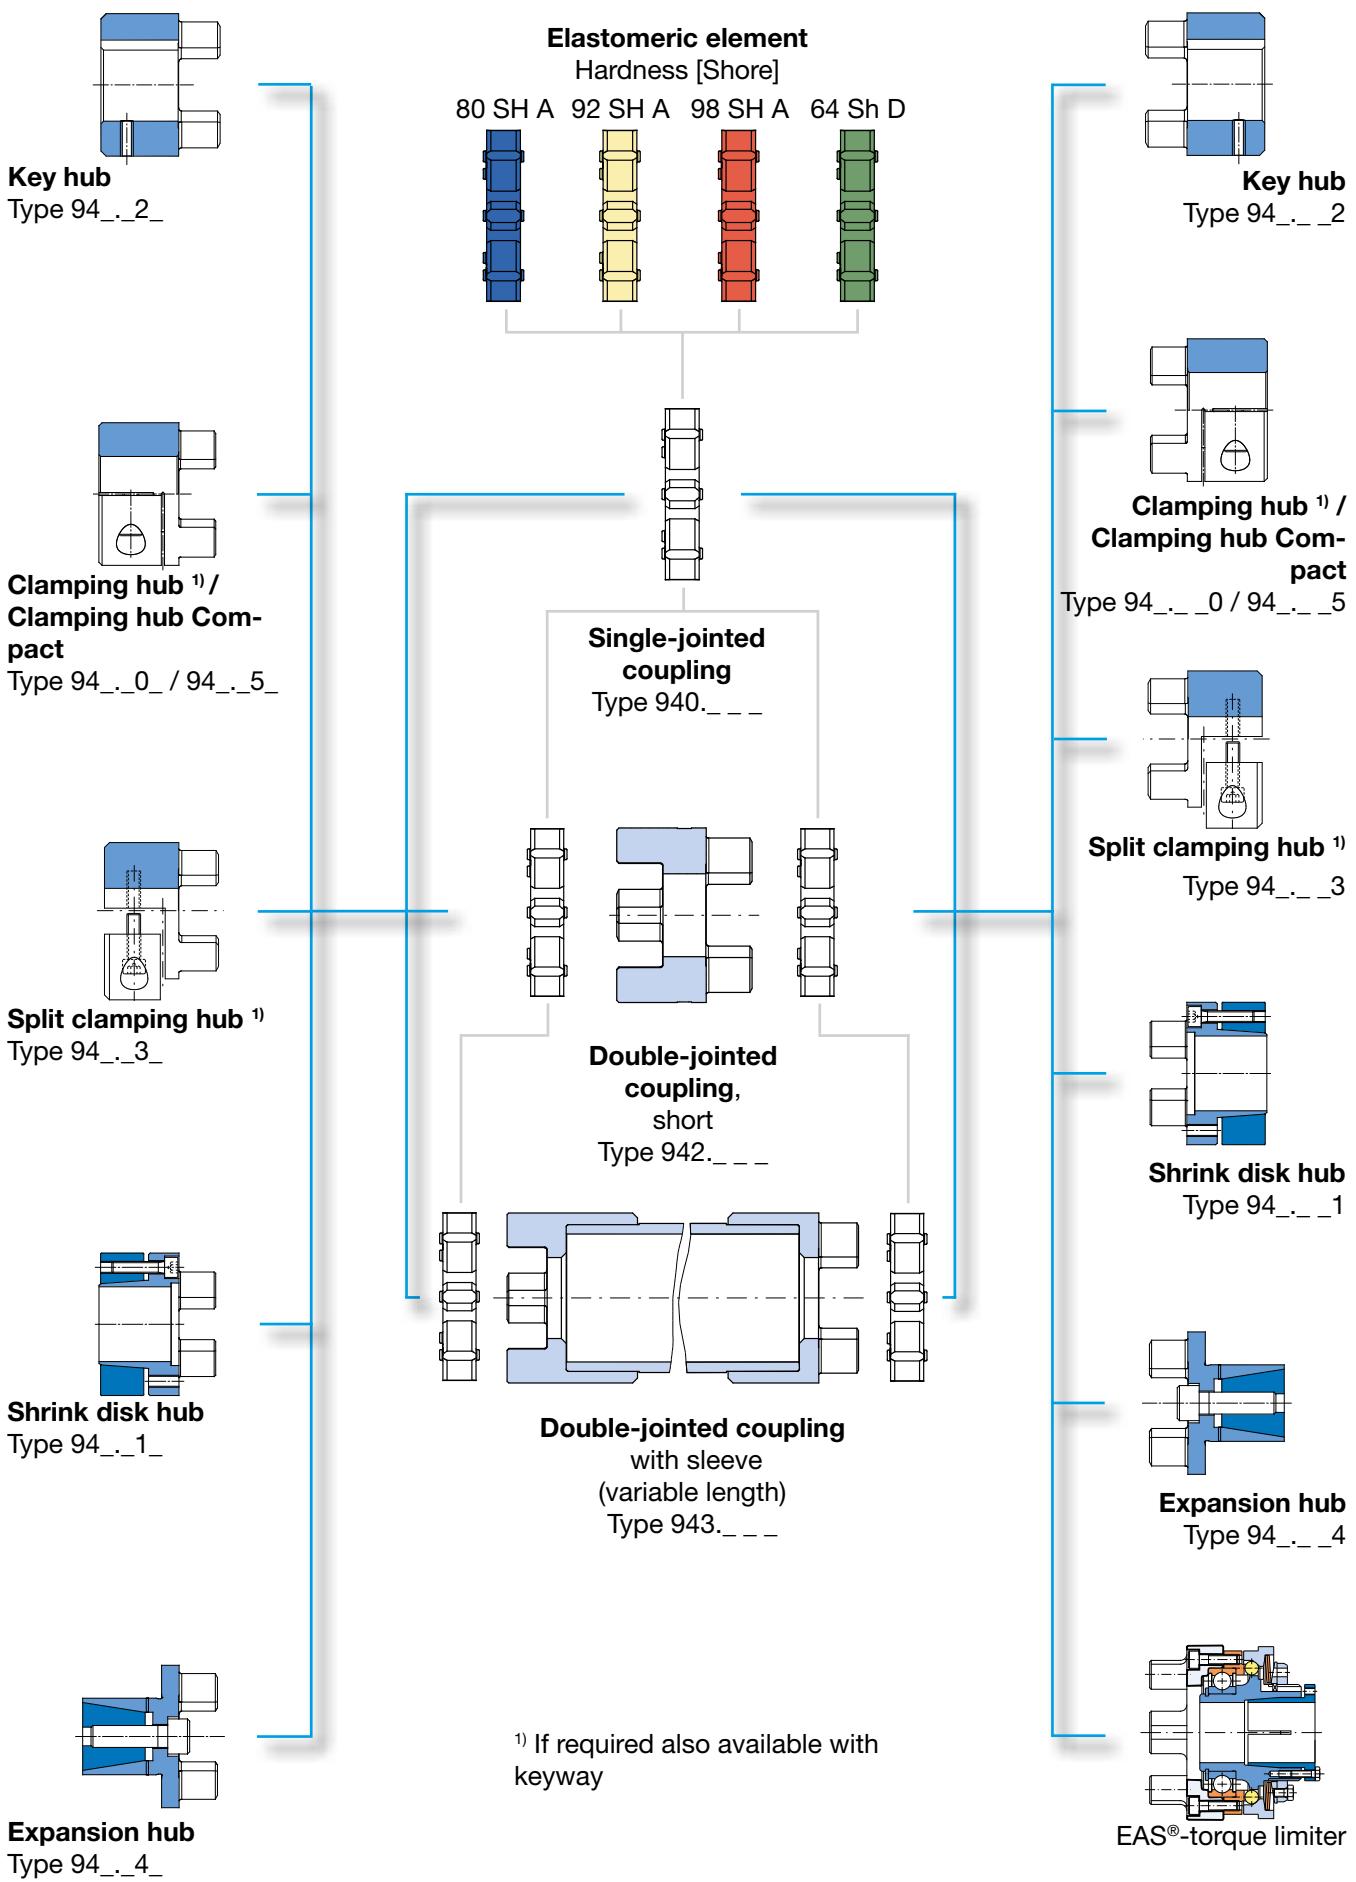

ROBA®-ES with key hubs

Sizes 14 to 65

Single-jointed coupling / Type 940._ 22._

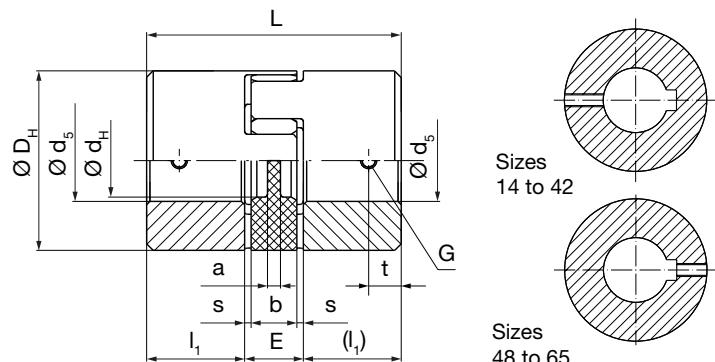

The adjusting screw is offset by 180° to the keyway on Sizes 14 to 42 (see Fig. above).



Technical Data and Main Dimensions		Size									
		14	19	24	28	38	42	48	55	65	
Minimum hub bore ^{1) 2)}	d_5^{H7} min	[mm]	6	6	8	10	12	14	20	20	38
Maximum hub bore ^{1) 2)}	d_5^{H7} max	[mm]	15	24	28	38	45	55	60	70	80
Maximum speed ^{3) 4)}	n_{max}	[rpm]	19000	14000	10600	8500	7100	6000	5600	5000	4600

Mass moments of inertia J [10^{-3} kgm 2] ^{5) 6)}

	Size	14	19	24	28	38	42	48	55	65
Elastomeric element		0.0005	0.0012	0.0067	0.0154	0.042	0.09	0.143	0.248	0.474
Key hub		0.0026	0.0175	0.0781	0.169	0.498	3.093	5.173	10.096	18.524
Single-jointed coupling short		0.0057	0.0362	0.1629	0.3534	1.038	6.276	10.489	20.44	37.522
Sleeve with $H_s = 1000$ mm		0.075	0.27	0.74	1.33	2.42	14.33	29.7	48.94	71.43
Sleeve with 1000 mm tube		0.071	0.236	0.676	1.202	1.917	10.676	24.89	41.167	54.082

Weights [kg] ^{5) 6)}

	Size	14	19	24	28	38	42	48	55	65
Elastomeric element		0.0048	0.007	0.019	0.037	0.054	0.081	0.104	0.149	0.216
Key hub		0.018	0.064	0.161	0.236	0.47	2.03	2.792	4.136	5.95
Single-jointed coupling short		0.041	0.135	0.341	0.509	0.994	4.141	5.688	8.421	12.116
Sleeve with $H_s = 1000$ mm		0.595	1.036	1.323	1.631	2.101	9.429	15.764	18.009	21.351
Sleeve with 1000 mm tube		0.574	0.86	1.22	1.477	1.705	7.383	13.561	15.193	16.622

Dimensions	Size								
	14	19	24	28	38	42	48	55	
a	2	4	4	5	5	5	9	8	
b	10	12	14	15	18	20	21	22	26
D_H	30	40	55	65	80	95	105	120	135
d_H	10.5	18	27	30	38	46	51	60	68
E	13	16	18	20	24	26	28	30	35
G	M4	M5	M5	M6	M8	M8	M10	M10	
L	35	66	78	90	114	126	140	160	185
L₂	56	92	112	128	158	174	192	218	252
L₃	dependent on H_s								
I₁	11	25	30	35	45	50	56	65	75
I₂	34	42	52	58	68	74	80	88	102
H_{s min}	68	87	101	115	143	162	178	200	230
H_{s max}	2000	2000	2000	2000	2000	2000	3000	3000	
s	1.5	2.0	2.0	2.5	3.0	3.0	3.5	4.0	4.5
t	5	10	10	15	15	20	25	20	20


We reserve the right to make dimensional and constructional alterations.

Stock program	Size				
	14	19	24	28	38
Bore					
06					
08	x				
09					
010	x	x			
011	x				
012	x	x			
014	x	x	x		
015	x	x			
016	x	x			
017					
018	x	x			
019	x	x	x		
020	x	x	x	x	
022				x	
024	x	x			
025	x	x	x		
028				x	
030			x	x	
032			x	x	
035				x	
038				x	



ROBA®-ES with key hubs

Sizes 14 to 65

Double-jointed coupling short / Type 942. 22.

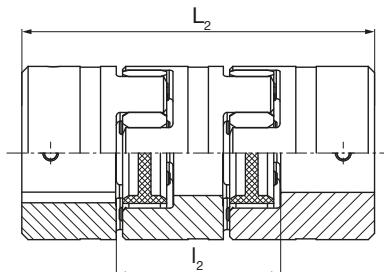

Double-jointed coupling with sleeve / Type 943._22._

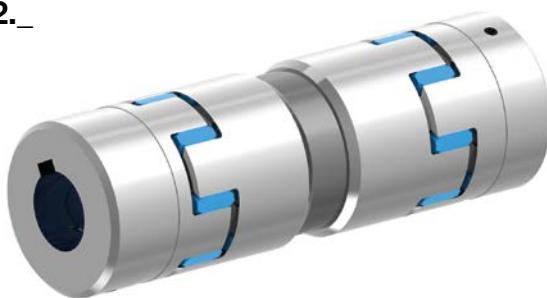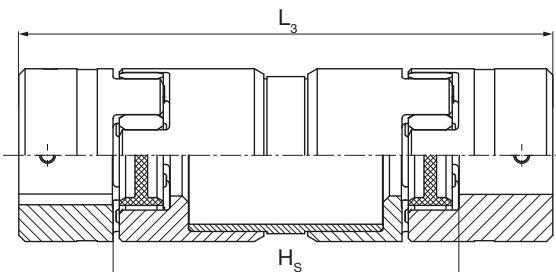

Order Number



Example: 42 / 940.022.F / Ød₅ 30 / Ød₅ 30

- 1) Recommended hub / shaft tolerance: H7 / k6
 - 2) In order to dimension the shaft-hub connection, the calculation procedure acc. DIN 6892 is to be applied. For the calculation, please take the yield point R_p 0.2 = 200 N/mm² for aluminium and the yield strength R_e = 350 N/mm² for steel.
 - 3) Also applicable for double-jointed design
 - 4) Not valid for designs with sleeve (see diagram: "Permitted speeds for sleeve" on page 26)
 - 5) Mass moments of inertia and weights are valid for one elastomeric element
 - 6) Mass moments of inertia and weights are valid for maximum bore
 - 7) Further Sizes available on request

ROBA®-ES with clamping hubs

Sizes 14 to 65

Single-jointed coupling / Type 940._ 00._

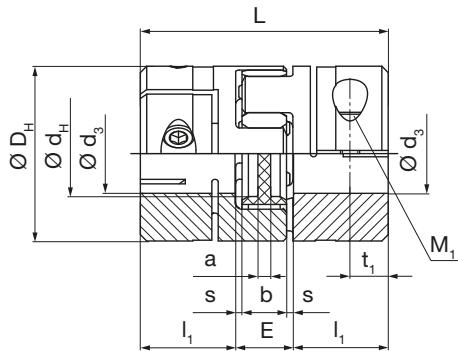

Technical Data and Main Dimensions		Size									
		14	19	24	28	38	42	48	55	65	
Minimum hub bore ^{1) 2)}	d_3^{F7} min	[mm]	6	10	15	19	20	28	35	40	45
Maximum hub bore ^{1) 2)}	d_3^{F7} max	[mm]	15	20	28	35	45	50	55	70	80
Maximum speed ^{3) 4)}	n_{\max}	[rpm]	12600	9300	7000	5600	4700	4000	3700	3300	3000
Tightening torque clamping screws	T_A	[Nm]	1.4	10	10	25	25	70	120	120	200

Mass moments of inertia J [10^{-3} kgm^2] ^{5) 6)}

Size	14	19	24	28	38	42	48	55	65
Elastomeric element	0.0005	0.0012	0.0067	0.0154	0.042	0.09	0.143	0.248	0.474
Clamping hub	0.0028	0.0193	0.076	0.168	0.481	3.104	5.176	9.742	17.985
Single-jointed coupling short	0.0061	0.0398	0.1587	0.3514	1.004	6.298	10.495	19.732	36.444
Sleeve with $H_s = 1000$ mm	0.075	0.27	0.74	1.33	2.42	14.33	29.7	48.94	71.43
Sleeve with 1000 mm tube	0.071	0.236	0.676	1.202	1.917	10.676	24.89	41.167	54.082

Weights [kg] ^{5) 6)}

Size	14	19	24	28	38	42	48	55	65
Elastomeric element	0.0048	0.007	0.019	0.037	0.054	0.081	0.104	0.149	0.216
Clamping hub	0.02	0.077	0.159	0.245	0.456	2.134	2.922	4.021	5.818
Single-jointed coupling short	0.0448	0.161	0.337	0.527	0.966	4.349	5.948	8.191	11.852
Sleeve with $H_s = 1000$ mm	0.595	1.036	1.323	1.631	2.101	9.429	15.764	18.009	21.351
Sleeve with 1000 mm tube	0.574	0.86	1.22	1.477	1.705	7.383	13.561	15.193	16.622

Dimensions	Size								
	14	19	24	28	38	42	48	55	
a	2	3	4	5	6	6	5	9	8
b	10	12	14	15	18	20	21	22	26
D_H	30	40	55	65	80	95	105	120	135
D_K	32.2	47	56.4	72.6	83.3	98.8	108	122	139
d_H	10.5	18	27	30	38.5	46	51	60	68
E	13	16	18	20	24	26	28	30	35
L	35	66	78	90	114	126	140	160	185
L_2	56	92	112	128	158	174	192	218	252
L_3	dependent on H_s								
I_1	11	25	30	35	45	50	56	65	75
I_2	34	42	52	58	68	74	80	88	102
$H_{s\min}$	68	87	101	115	143	162	178	200	230
$H_{s\max}$	2000	2000	2000	2000	2000	2000	2000	3000	3000
M_1	M3	M6	M6	M8	M8	M10	M12	M12	M14
s	1.5	2	2	2.5	3	3	3.5	4	4.5
t_1	5.5	12	12	13.5	20	20	21	26	27.5
t_2	11	14	20	24	30	34	36	45	52


Stock program	Size				
	Bore	14	19	24	28
Ø6					
Ø7					
Ø8	x				
Ø9	x				
Ø10	x	x			
Ø11	x	x			
Ø12	x	x			
Ø14	x	x			
Ø15	x	x	x		
Ø16	x	x			
Ø17					
Ø18				x	
Ø19		x	x	x	
Ø20	x	x	x		
Ø22		x	x		
Ø24			x	x	
Ø25		x	x	x	
Ø28		x	x		
Ø30				x	
Ø32				x	x
Ø35					x
Ø38				x	x
Ø40				x	

We reserve the right to make dimensional and constructional alterations.


ROBA®-ES with clamping hubs

Sizes 14 to 65

Double-jointed coupling short / Type 942._00._

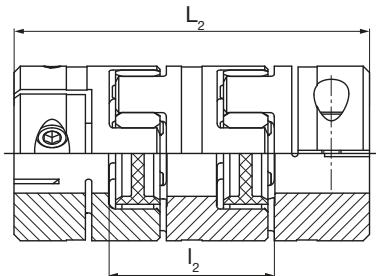

Double-jointed coupling with sleeve / Type 943._00._

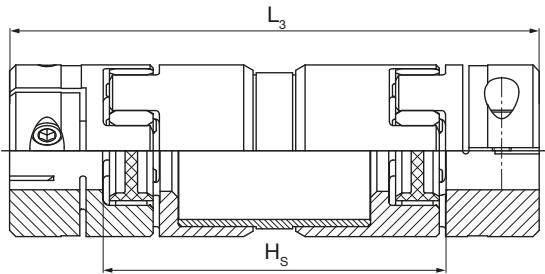

Order Number

0	Single-jointed coupling	Sleeve length H_s [mm]					
2	Double-jointed coupling short						
3	Double-jointed coupling with sleeve						
	▼	▼					
__ / 9 4 __ . __ 0 0 . __ / __ / __ / __ / __							
△	△	△					
Size 14 to 65 ⁷⁾	Elastomeric element hardness 98 Sh A (red) 92 Sh A (yellow) 80 Sh A (blue) 64 Sh D (green)	0 1 5 6	Aluminium design up to Size 38 Steel design from Size 42	A F	Bore ø d_3^{F7} (see Table)	Bore ø d_3^{F7} (see Table)	Operating speed n_s [rpm] for sleeve


Example: 42 / 940.000.F / Ød₃ 30 / Ød₃ 30

- 1) Recommended hub / shaft tolerance: F7 / K6
- 2) Transmittable torques dependent on bore, see page 28.
- 3) Also applicable for double-jointed design
- 4) Not valid for designs with sleeve (see diagram: "Permitted speeds for sleeve" on page 26)
- 5) Mass moments of inertia and weights are valid for one elastomeric element
- 6) Mass moments of inertia and weights are valid for maximum bore
- 7) Further Sizes available on request

ROBA®-ES with clamping hubs Compact

Sizes 14 to 38

Single-jointed coupling / Type 940._ 55._

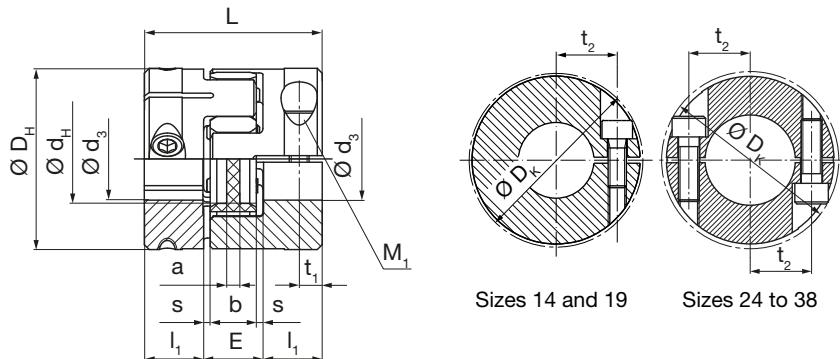

Technical Data and Main Dimensions	Size				
	14	19	24	28	38
Minimum hub bore ^{1) 2)}	d_3^{F7} min	[mm]	5	8	10
Maximum hub bore ^{1) 2)}	d_3^{F7} max	[mm]	12	20	32
Maximum speed ^{3) 4)}	n_{max}	[rpm]	12600	9300	7000
Tightening torque clamping screws	T_A	[Nm]	3	10	10
			25	25	48

Mass moments of inertia J [10^{-3} kgm 2] ^{5) 6)}

Size	14	19	24	28	38
Elastomeric element	0.0005	0.0012	0.0067	0.0154	0.042
Clamping hub	0.0025	0.0139	0.0493	0.1174	0.328
Single-jointed coupling short	0.0055	0.029	0.1053	0.2502	0.698
Sleeve with $H_s = 1000$ mm	0.075	0.27	0.74	1.33	2.42
Sleeve with 1000 mm tube	0.071	0.236	0.676	1.202	1.917

Weights [kg] ^{5) 6)}

Size	14	19	24	28	38
Elastomeric element	0.0048	0.007	0.019	0.037	0.054
Clamping hub	0.0192	0.055	0.098	0.173	0.311
Single-jointed coupling short	0.0432	0.117	0.215	0.383	0.676
Sleeve with $H_s = 1000$ mm	0.595	1.036	1.323	1.631	2.101
Sleeve with 1000 mm tube	0.574	0.86	1.22	1.477	1.705

Dimensions	Size				
	14	19	24	28	38
a	2	3	4	5	6
b	10	12	14	15	18
D _H	30	40	55	65	80
D _K	31	46	58	69.5	86
d _H	10.5	18	27	30	38.5
E	13	16	18	20	24
L	32	50	54	62	76
L ₂	53	76	88	100	120
L ₃	dependent on H _s				
I ₁	9.5	17	18	21	26
I ₂	34	42	52	58	68
H _{s min}	68	87	101	115	143
H _{s max}	2000	2000	2000	2000	2000
M ₁	M4	M6	2xM6	2xM8	2xM10
s	1.5	2	2	2.5	3
t ₁	5	8	7	9	10
t ₂	9.6	14	20	23.8	30.5


Stock program	Size				
	Bore	14	19	24	28
Ø6					
Ø7					
Ø8	x				
Ø9	x				
Ø10	x	x			
Ø11	x	x			
Ø12	x	x			
Ø14	x				
Ø15	x	x			
Ø16	x	x			
Ø17					
Ø18			x		
Ø19		x	x		
Ø20		x	x		
Ø22	x	x			
Ø24		x	x		
Ø25		x	x	x	
Ø28		x	x		
Ø30			x		
Ø32			x	x	
Ø35				x	
Ø38				x	x
Ø40				x	

We reserve the right to make dimensional and constructional alterations.


ROBA®-ES with clamping hubs Compact

Sizes 14 to 13

Double-jointed coupling short / Type 942._ 55._



Double-jointed coupling with sleeve / Type 943._ 55._

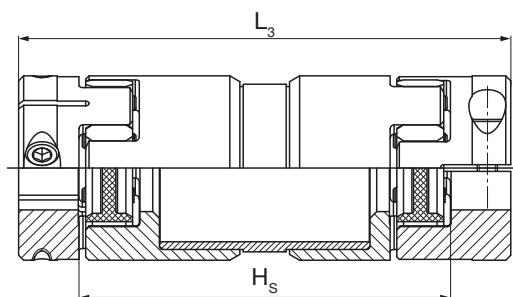

Order Number

	0	Single-jointed coupling	Sleeve length H_s [mm]
	2	Double-jointed coupling short	
	3	Double-jointed coupling with sleeve	
		▼	▼
— / 9 4 — . — 5 5 . — / — / — / — / — / —			
▲	▲	▲	▲
Size 14 to 38⁷⁾	Elastomeric element hardness	98 Sh A (red) 92 Sh A (yellow) 80 Sh A (blue) 64 Sh D (green)	0 1 5 6
		Aluminium design up to Size 38	A
			Bore ø d_3^{F7} (see Table)
			Bore ø d_3^{F7} (see Table)
			Operating speed n_s [rpm] for sleeve


Example: 38 / 940.055.A / Ød₃ 30 / Ød₃ 30

- 1) Recommended hub / shaft tolerance: F7 / k6
- 2) Transmittable torques dependent on bore, see page 28.
- 3) Also applicable for double-jointed design
- 4) Not valid for designs with sleeve (see diagram: "Permitted speeds for sleeve" on page 26)
- 5) Mass moments of inertia and weights are valid for one elastomeric element
- 6) Mass moments of inertia and weights are valid for maximum bore
- 7) Further Sizes available on request

ROBA®-ES with split clamping hubs

Sizes 14 to 65

Single-jointed coupling / Type 940._ 33._

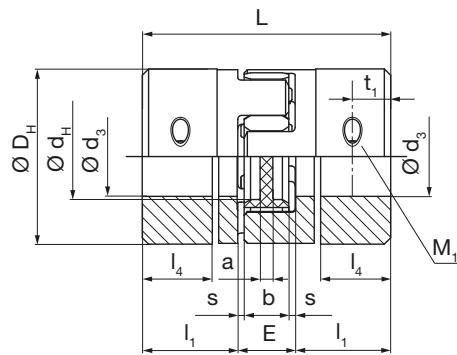

Technical Data and Main Dimensions		Size								
		14	19	24	28	38	42	48	55	65
Minimum hub bore ^{1) 2)}	$d_3^{H7}_{\min}$ [mm]	8	8	10	14	18	22	22	40	45
Maximum hub bore ^{1) 2)}	$d_3^{H7}_{\max}$ [mm]	15	20	28	35	45	50	55	70	80
Maximum speed ^{3) 4)}	n_{\max} [rpm]	12600	9300	7000	5600	4700	4000	3700	3300	3000
Tightening torque clamping screws	T_A [Nm]	1.4	10	10	25	25	48	84	84	84

Mass moments of inertia J [10^{-3} kgm^2] ^{5) 6)}

Size	14	19	24	28	38	42	48	55	65
Elastomeric element	0.0005	0.0012	0.0067	0.0154	0.042	0.09	0.143	0.248	0.474
Split clamping hub	0.0041	0.0193	0.077	0.176	0.5003	3.045	5.051	9.536	17.693
Single-jointed coupling short	0.0087	0.0398	0.1607	0.3674	1.0426	6.18	10.245	19.32	35.86
Sleeve with $H_s = 1000$ mm	0.075	0.27	0.74	1.33	2.42	14.33	29.7	48.94	71.43
Sleeve with 1000 mm tube	0.071	0.236	0.676	1.202	1.917	10.676	24.89	41.167	54.082

Weights [kg] ^{5) 6)}

Size	14	19	24	28	38	42	48	55	65
Elastomeric element	0.0048	0.007	0.019	0.037	0.054	0.081	0.104	0.149	0.216
Split clamping hub	0.0294	0.076	0.16	0.258	0.475	2.104	2.867	3.95	5.737
Single-jointed coupling short	0.0636	0.159	0.339	0.553	1.004	4.289	5.838	8.049	11.69
Sleeve with $H_s = 1000$ mm	0.595	1.036	1.323	1.631	2.101	9.429	15.764	18.009	21.351
Sleeve with 1000 mm tube	0.574	0.86	1.22	1.477	1.705	7.383	13.561	15.193	16.622



Dimensions	Size								
	14	19	24	28	38	42	48	55	65
a	2	3	4	5	6	6	5	9	8
b	10	12	14	15	18	20	21	22	26
D_H	30	40	55	65	80	95	105	120	135
D_K	32.2	47	58	71	83	99	106.5	122	136
d_H	10.5	18	27	30	38.5	46	51	60	68
E	13	16	18	20	24	26	28	30	35
L	50	66	78	90	114	126	140	160	185
L₂	71	92	112	128	158	174	192	218	252
L₃	dependent on L_R								
L_{R min}	76.5	103	117	133	169	184	204	223	267
L_{R max}	2008.5	2016	2016	2018	2026	2022	2026	3023	3037
I₁	18.5	25	30	35	45	50	56	65	75
I₂	34	42	52	58	68	74	80	88	102
H_{s min}	68	87	101	115	143	162	178	200	230
H_{s max}	2000	2000	2000	2000	2000	2000	2000	3000	3000
I₄	14.25	17	22	26	32	39	43	53.5	56.5
M₁	M3	M6	M6	M8	M8	M10	M12	M12	M12
s	1.5	2	2	2.5	3	3	3.5	4	4.5
t₁	7	8.5	12	13.5	16	20	22	26	27.5
t₂	22	28	42	48	60	72	72	90	104

We reserve the right to make dimensional and constructional alterations.



ROBA®-ES with split clamping hubs

Sizes 14 to 65

Double-jointed coupling short / Type 942._33._

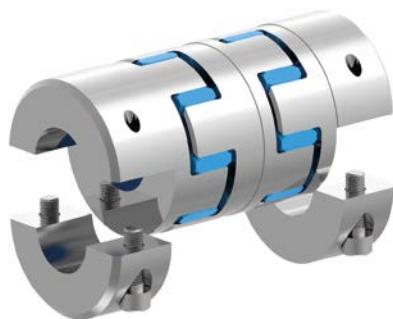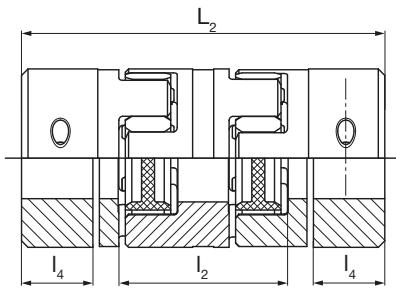

Double-jointed coupling with sleeve Type 943._33._

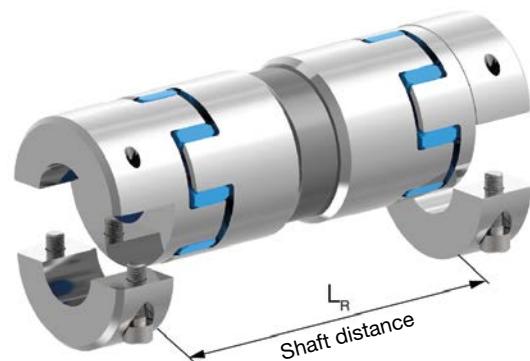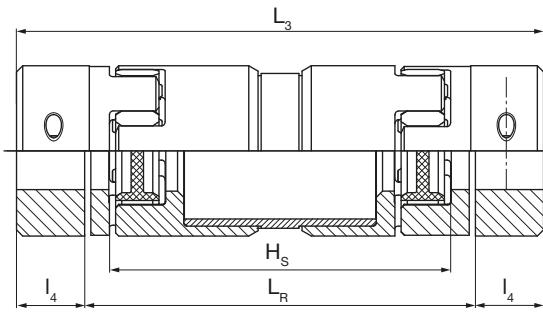

Order Number

- | | |
|----------|-------------------------------------|
| 0 | Single-jointed coupling |
| 2 | Double-jointed coupling short |
| 3 | Double-jointed coupling with sleeve |

Shaft distance
L_R [mm]

— / 9 4 — . — 3 3 . — / — / — / — / —	
△	△
Size	Elastomeric element hardness
14 to 65⁷⁾	98 Sh A (red) 92 Sh A (yellow) 80 Sh A (blue) 64 Sh D (green)
	0 1 5 6
	Aluminium design up to Size 38 Steel design from Size 42
	A F
	Bore ø d₃^{H7} (see Table)
	Bore ø d₃^{H7} (see Table)
	Operating speed n_s [rpm] for sleeve


Example: 42 / 940.033.F / Ød₃ 30 / Ød₃ 30

- 1) Recommended hub / shaft tolerance: H7 / g6
- 2) Transmittable torques dependent on bore, see page 29.
- 3) Also applicable for double-jointed design
- 4) Not valid for designs with sleeve (see diagram: "Permitted speeds for sleeve" on page 26)
- 5) Mass moments of inertia and weights are valid for one elastomeric element
- 6) Mass moments of inertia and weights are valid for maximum bore
- 7) Further Sizes available on request

ROBA®-ES with aluminium shrink disk hubs

Sizes 14 to 38

Single-jointed coupling / Type 940._ 11.A

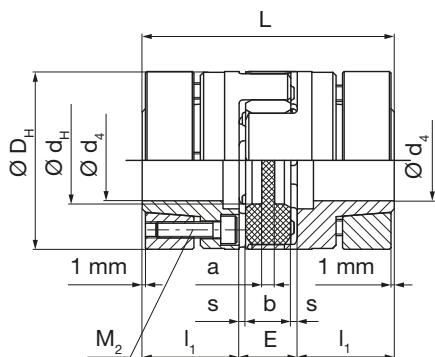

Technical Data and Main Dimensions		Size				
		14	19	24	28	38
Minimum hub bore ^{1) 2)}	d_4^{H7} min [mm]	6	10	15	19	20
Maximum hub bore ^{1) 2)}	d_4^{H7} max [mm]	14	20	28	38	45
Maximum speed ³⁾	n_{max} [rpm]	28000	21000	15500	13200	10500
Tightening torque clamping screws	T_A [Nm]	1.3	3	6	6	10

Mass moments of inertia J [10^{-3} kgm 2] ^{4) 5)}

Size	14	19	24	28	38
Elastomeric element	0.0005	0.0012	0.0067	0.0154	0.042
Shrink disk hub	0.0065	0.0313	0.134	0.304	0.929
Single-jointed coupling short	0.0135	0.0638	0.2747	0.6234	1.9



Weights [kg] ^{4) 5)}

Size	14	19	24	28	38
Elastomeric element	0.0048	0.007	0.019	0.037	0.054
Shrink disk hub	0.046	0.12	0.271	0.412	0.852
Single-jointed coupling short	0.0968	0.247	0.561	0.861	1.758

Dimensions	Size				
	14	19	24	28	38
a	2	3	4	5	6
b	10	12	14	15	18
D _H	30	40	55	65	80
d _H	10.5	18	27	30	38.5
E	13	16	18	20	24
L	50	66	78	90	114
L ₂	71	92	112	128	158
I ₁	18.5	25	30	35	45
I ₂	34	42	52	58	68
M ₂	4xM3	6xM4	4xM5	8xM5	8xM6
s	1.5	2	2	2.5	3

We reserve the right to make dimensional and constructional alterations.

Stock program	Size					
	Bore	14	19	24	28	38
Ø10	x					
Ø11						
Ø12	x	x				
Ø14	x	x				
Ø15		x	x			
Ø16		x	x			
Ø18			x			
Ø19	x	x				
Ø20	x	x	x			
Ø22		x	x			
Ø24	x	x	x			
Ø25	x	x	x			
Ø28	x	x	x			
Ø30			x	x		
Ø32			x	x		
Ø35			x	x		
Ø38					x	
Ø40						

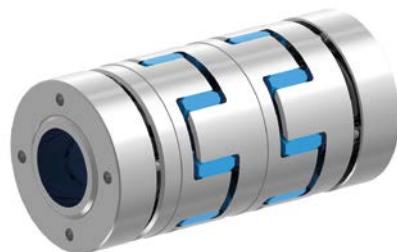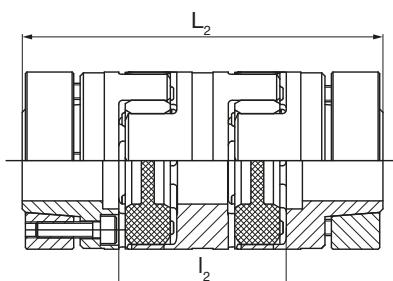ROBA®-ES with aluminium shrink disk hubs
Sizes 14 to 38
Double-jointed coupling short / Type 942._ 11.A

Order Number

- | | |
|----------|-------------------------------|
| 0 | Single-jointed coupling |
| 2 | Double-jointed coupling short |



	/	9	4		.		1	1	.		/		/	
▲		▲		▲		▲		▲		▲		▲		▲
Size		Elastomeric		98 Sh A (red)	0		Aluminium design		A		Bore ø		Bore ø	
14		element		92 Sh A (yellow)	1						d₄^{H7}		d₄^{H7}	
to		hardness		80 Sh A (blue)	5									
38⁶⁾				64 Sh D (green)	6									

(see Table)


Example: 38 / 940.011.A / Ød₄ 30 / Ød₄ 30

- 1) Recommended hub / shaft tolerance: H7 / k6
- 2) Transmittable torques dependent on bore, see page 27.
- 3) Also applicable for double-jointed design
- 4) Mass moments of inertia and weights are valid for one elastomeric element
- 5) Mass moments of inertia and weights are valid for maximum bore
- 6) Further Sizes available on request

ROBA®-ES with steel shrink disk hubs

Sizes 14-32 to 65

Single-jointed coupling / Type 940._ 11._

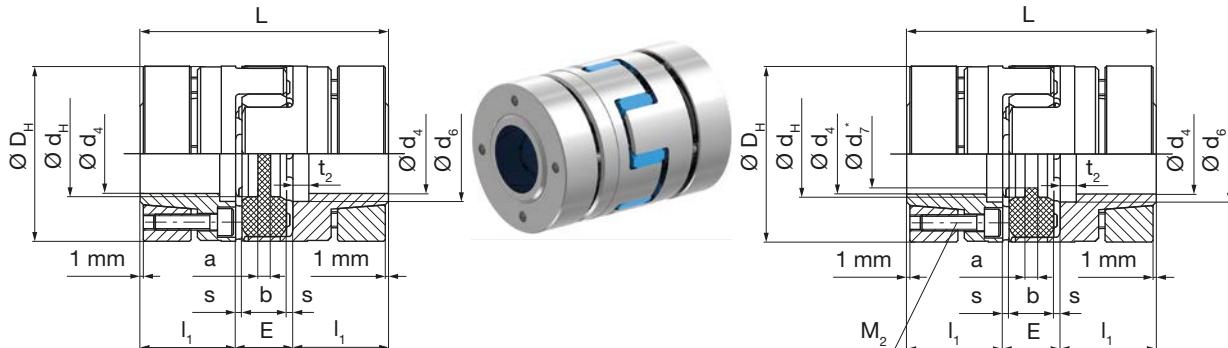

Type 940._ 11.P – Sizes 14 to 38

Type 940._ 11.F – Sizes 42 to 65

Type 940.011.P

Sizes 14-32 to 28 acc. DIN 69002

Technical Data and Main Dimensions	Size										
	14-32	19-37,5	19	24-50	24	28	38	42	48	55	65
Minimum hub bore ^{1) 2)}	$d_4 \text{ min}$	[mm]	6	10	10	15	15	19	20	28	35
Maximum hub bore ^{1) 2)}	$d_4 \text{ max}$	[mm]	14	16	20	24	28	38	45	50	60
DIN-bore ³⁾	d_4	[mm]	14	16	19	24	25	35	-	-	-
Maximum speed	single-jointed	n_{\max}	[rpm]	28000	21000	21000	15500	15500	13200	10500	9000
	Double-jointed short	n_{\max}	[rpm]	-	-	-	-	-	-	9000	8000
Tightening torque clamping screws	T_A	[Nm]	1.3	3.0	3.0	6.0	6.0	6.0	10	25	30
										52	90

Mass moments of inertia J [10^{-3} kgm^2] ^{4) 5)}

Size	14-32	19-37,5	19	24-50	24	28	38	42	48	55	65
Elastomeric element	0.0005	0.0012	0.0012	0.0067	0.0067	0.0154	0.042	0.09	0.143	0.248	0.474
Shrink disk hub	0.0128	0.0368	0.0471	0.136	0.202	0.433	1.332	2.948	4.809	9.099	17.287
Single-jointed coupling short	0.0261	0.0748	0.0954	0.2787	0.4107	0.8814	2.706	5.986	9.761	18.446	35.048

Weights [kg] ^{4) 5)}

Size	14-32	19-37,5	19	24-50	24	28	38	42	48	55	65
Elastomeric element	0.0048	0.007	0.007	0.019	0.019	0.037	0.054	0.081	0.104	0.149	0.216
Shrink disk hub	0.086	0.174	0.185	0.348	0.418	0.606	1.256	2.022	2.62	3.754	5.766
Single-jointed coupling short	0.1768	0.355	0.377	0.715	0.855	1.249	2.566	4.125	5.344	7.657	11.748


Dimensions	Size										
	14-32	19-37,5	19	24-50	24	28	38	42	48	55	65
a	2	4	4	4	4	5	5	5	5	9	8
b	10	12	12	14	14	15	18	20	21	22	26
D_H	32	37.5	40	50	55	65	80	95	105	120	135
d_H	10.5	18	18	27	27	30	38	46	51	60	68
d₆	17	19	22	29	30	40	46	55	60	72	77
d₇ ³⁾	8.5	9.5	9.5	12.5	12.5	14.5	-	-	-	-	-
E	13	16	16	18	18	20	24	26	28	30	35
L	50	66	66	78	78	90	114	126	140	160	185
L₂							174	192	218	252	
I₁	18.5	25	25	30	30	35	45	50	56	65	75
I₂							74	80	88	102	
M₂	4 x M3	6 x M4	6 x M4	4 x M5	4 x M5	8 x M5	8 x M6	4 x M8	4 x M8	4 x M10	4 x M12
s	1.5	2.0	2.0	2.0	2.0	2.5	3.0	3.0	3.5	4.0	4.5
t₂	3	4	4	5	5	5	5	6	7	7	

We reserve the right to make dimensional and constructional alterations.

ROBA®-ES with steel shrink disk hubs

Sizes 14-32 to 65

Double-jointed coupling short / Type 942. 11.

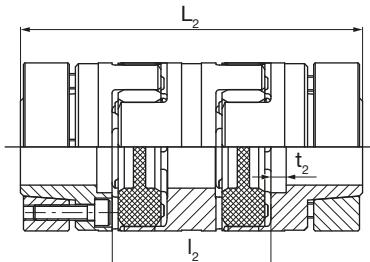

Order Number


Example: 42 / 940.011.F / Ød₄ 30 / Ød₄ 30

- 1) Recommended hub / shaft tolerance: H6 / k6, from Size 42: H7 / k6
 - 2) Transmittable torques dependent on bore, see page 27.
 - 3) Elastomeric elements with DIN bores only available with 98 Sh A (red),
Type 940.011.P
 - 4) Mass moments of inertia and weights are valid for one elastomeric
element
 - 5) Mass moments of inertia and weights are valid for maximum bore
 - 6) Double-joint designs are only available from Size 42.
 - 7) Further Sizes available on request

ROBA®-ES with expansion hub and clamping hub

Sizes 14 to 28

Single-jointed coupling / Type 940._ 04._

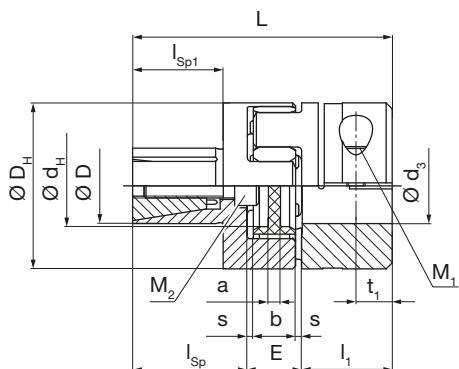

Technical Data and Main Dimensions		Size			
		14	19	24	28
Minimum hub bore ^{1) 2)}	d_3^{F7} min	[mm]	6	6	8
Maximum hub bore ^{1) 2)}	d_3^{F7} max	[mm]	15	20	28
Diameter expansion hub	D_{h7}	[mm]	12	20	25
Maximum speed	n_{max}	[rpm]	12600	9300	7000
Tightening torque M_2	T_A	[Nm]	5.8	10.1	24
Mass moments of inertia $J [10^{-3} \text{ kgm}^2]$ ^{3) 4)}					
Size		14	19	24	28
Elastomeric element		0.0005	0.0012	0.0067	0.0154
Clamping hub		0.0028	0.0193	0.076	0.168
Expansion hub		0.0019	0.0097	0.043	0.081
Single-jointed coupling short		0.0052	0.0302	0.1257	0.2644

Weights [kg] ^{3) 4)}

Size	14	19	24	28
Elastomeric element	0.0048	0.007	0.019	0.037
Clamping hub	0.02	0.076	0.159	0.245
Expansion hub	0.023	0.071	0.188	0.286
Single-jointed coupling short	0.0478	0.154	0.366	0.568

Dimensions	Size			
	14	19	24	28
a	2	3	4	5
b	10	12	14	15
D_H	30	40	55	65
D_K	32.2	47	56.4	72.6
d_H	10.5	18	27	30
E	13	16	18	20
L	42.5	69	86	109
l_1	11	25	30	35
l_{sp}	18.5	28	38	54
l_{sp1}	12.5	20	30	36
M_1	M3	M6	M6	M8
M_2	M5	M6	M8	M10
s	1.5	2	2	2.5
t_1	5.5	12	12	13.5

We reserve the right to make dimensional and constructional alterations.

Order Number

0 Single-jointed coupling



	/	9	4		.		0	4	.		/		/	
▲		▲		▲		▲		▲		▲		▲		▲
Size 14 to 28⁵⁾	Elastomeric element hardness	98 Sh A (red) 92 Sh A (yellow) 80 Sh A (blue) 64 Sh D (green)	0 1 5 6	Aluminium design	A	ø D_{h7} (see Table)	Bore ø d₃^{F7} (see Table)							

Example: 28 / 940.004.A / ØD 35 / Ød₃ 30

- 1) Recommended fit connection for expansion hub: F7 / h7
- 2) Transmittable torques dependent on bore, see page 29.
- 3) Mass moments of inertia and weights are valid for one elastomeric element
- 4) Mass moments of inertia and weights are valid for maximum bore
- 5) Further Sizes available on request

ROBA®-ES Coupling Dimensioning

1. Approximate calculation of the coupling torque:

1.1. T_N from the nominal power

$$T_N = \frac{9550 \times P_{AN/LN}}{n}$$

1.2. Dynamic torques T_s and T_w (5.1 and 5.2):

Drive-side excitation:

Peak torque: $T_s = T_{AS} \times \frac{J_L}{J_A + J_L} \times S_A$

Alternating torque: $T_w = T_{AW} \times \frac{J_L}{J_A + J_L} \times V_R$

Output-side excitation:

Peak torque: $T_s = T_{LS} \times \frac{J_A}{J_A + J_L} \times S_L$

Alternating torque: $T_w = T_{LW} \times \frac{J_A}{J_A + J_L} \times V_R$

2. Comparison of torques occurring in the coupling with the permitted torques

The coupling must be dimensioned so that the loads occurring do not exceed the permitted values in any operating state.

2.1. Load due to nominal torque

$$T_{KN} \geq T_N \times S_\delta$$

2.2. Load due to torque impacts (5.3)

$$T_{K\max} \geq T_s \times S_z \times S_\delta + T_N \times S_\delta$$

2.3. Load due to resonance passing through (5.4)

$$T_{K\max} \geq T_s \times S_z \times S_\delta \times V_R + T_N \times S_\delta$$

2.4. Load due to constantly alternating torque – cycle operation (5.5 and 5.6)

Permitted alternating torque on coupling:

$$T_{KW} = 0.25 \times T_{KN} \text{ (for aluminium hubs)}$$

$$T_{KW} = 0.35 \times T_{KN} \text{ (for steel hubs)}$$

$$T_{KW} \geq T_w \times S_\delta \times S_f$$

3. Inspection of permitted misalignments

$$\Delta K_a \geq \Delta W_a \times S_\delta$$

$$\Delta K_r \geq \Delta W_r \times S_\delta \times S_n$$

$$\Delta K_w \geq \Delta W_w \times S_\delta \times S_n$$

If more than one kind of misalignment occurs at the same time, please observe Fig. 2 (page 30).

4. Frictional locking inspection on hub connection

$T_R > T_{max}$: T_{max} is the maximum torque occurring in the coupling.

Values for T_R can be found on pages 27 to 29.

5. Explanations

5.1. The torque determination on the coupling is applicable if the shaft coupling in the system is the torsionally softest element, and therefore the system can be considered as a double-mass oscillator. If this is not the case, the calculation of the torque on the coupling requires a more detailed calculation procedure.

5.2. The impact factors S_A / S_L describe the impact progression. A rectangular progression of the peak torque is the heaviest impact ($S_A/S_L = 2.0$). A flat sinus progression of the peak torque is a light impact ($S_A/S_L = 1.2$).

5.3. T_s , the peak torque in the coupling, is the maximum torque on the coupling during the impact minus the system torque having an effect on the coupling during normal operation.

$$T_s = T_{max, impact} - T_N$$

5.4. If a drive is operated supercritically, meaning that the operating speed n lies above the resonance speed n_R , then resonance passing through causes particular loads.

If the resonance passes through quickly below the operating speed, only a few resonance peaks occur. The alternating torque in resonance can therefore be compared to the maximum torque on the coupling (see also 5.6).


5.5. S_f takes the frequency dependency of lifetime into account. The frequency dependency is first taken into account above 5 Hz.

5.6. On appreciable vibration excitation, the resonance must be moved out of the operating range by selecting a suitable torsional spring rigidity of the coupling.

ROBA®-ES Coupling Dimensioning

Service Factors for Coupling Dimensioning

V_R = Resonance factor

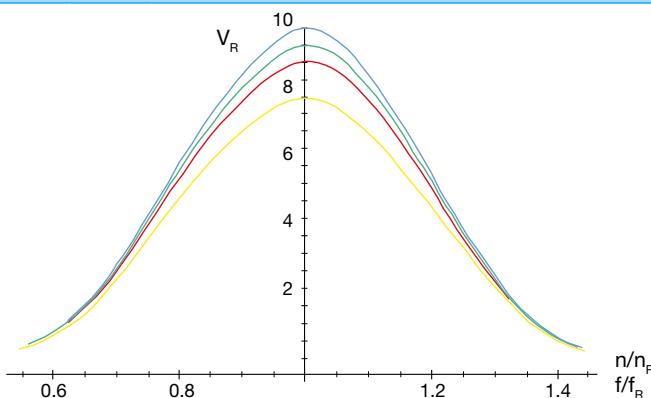

n_R = Resonance speed


$$n_R = \frac{30}{\pi} \sqrt{C_{T_{dyn.}} \frac{J_A + J_L}{J_A \times J_L}} \text{ [rpm]}$$

Blue: elast. element 80 Sh A
Yellow: elast. element 92 Sh A
Red: elast. element 98 Sh A
Green: elast. element 64 Sh D

f_R = Resonance frequency

$$f_R = \frac{1}{2\pi} \sqrt{C_{T_{dyn.}} \frac{J_A + J_L}{J_A \times J_L}} \text{ [s}^{-1}\text{]}$$

S_n = Speed factor

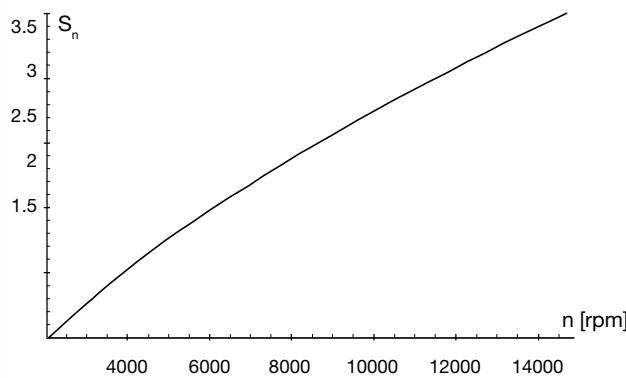

S_z = Start-up factor/impact frequency

S/h	0 – 100	101 – 200	201 – 400	401 – 800	801 – 1600
S _z	1	1.2	1.4	1.6	1.8

S_δ = Safety factor for temperature

T [°C]	-30 °C / +30 °C	+60 °C	+90 °C
S _δ	1	1.5	2

S_f = Frequency factor

f in H _z	≤ 5	> 5
S _f	1	$\sqrt{\frac{f}{5}}$

f shows the load alternation per second (Hz = s⁻¹)

Terms

P _{AN/LN}	[kW]	Drive-side/load-side power	ΔK _w	[°]	Permitted angular misalignment
T _R	[Nm]	Transmittable torque (frictional locking, Tables pages 27 to 29)	ΔW _a	[mm]	Axial shaft misalignment
T _{AS/AW}	[Nm]	Excitational torque drive end	ΔW _r	[mm]	Radial shaft misalignment
T _{LS/LW}	[Nm]	Excitational torque load side	ΔW _w	[°]	Angular shaft misalignment
T _N	[Nm]	System torque	c _T	[Nm/rad]	Torsional spring rigidity
T _w	[Nm]	System alternating torque	n	[rpm]	Nominal speed
T _s	[Nm]	Peak torque	n _R	[rpm]	Resonance speed
T _{max}	[Nm]	Maximum torque in the coupling	S _{A/L}	[-]	Impact factor drive end /load side
T _{KN}	[Nm]	Permitted nominal torque	S _n	[-]	Speed factor
T _{Kmax}	[Nm]	Permitted maximum torque	S _z	[-]	Start-up factor/impact frequency
T _{KW}	[Nm]	Permitted permanent alternating torque	S _δ	[-]	Temperature factor
J _A	[kgm ²]	Mass moment of inertia, drive end	S _f	[-]	Frequency factor
J _L	[kgm ²]	Mass moment of inertia, load side	V _R	[-]	Resonance factor
ΔK _a	[mm]	Permitted axial displacement	f	[1/s]=[Hz]	Load factor
ΔK _r	[mm]	Permitted radial misalignment	f _R	[Hz]	Resonance frequency

Technical Explanations

ROBA®-ES Elastomeric Elements

Elastomeric element hardness [Shore]	Colour	Permitted temperature range	
		Permanent temperature	Temporary max. temperature
80 Sh A	blue	-50 to +80 °C	-60 to +120 °C
92 Sh A	yellow	-40 to +90 °C	-50 to +120 °C
98 Sh A	red	-30 to +90 °C	-40 to +120 °C
64 Sh D	green	-30 to +100 °C	-40 to +140 °C

Torques

Size	Torques							
	Elastomeric element hard-ness 80 Sh A (blue)		Elastomeric element hard-ness 92 Sh A (yellow)		Elastomeric element hard-ness 98 Sh A (red)		Elastomeric element hard-ness 64 Sh D (green)	
	T _{KN} [Nm]	T _{K max} [Nm]	T _{KN} [Nm]	T _{K max} [Nm]	T _{KN} [Nm]	T _{K max} [Nm]	T _{KN} [Nm]	T _{K max} [Nm]
14	4	8	8	16	13	26	16	32
19	5	10	10	20	17	34	21	42
24	17	34	35	70	60	120	75	150
28	46	92	95	190	160	320	200	400
38	95	190	190	380	325	650	405	810
42	125	250	265	530	450	900	560	1120
48	150	300	310	620	525	1050	655	1310
55	200	400	410	820	685	1370	825	1650
65	450	900	900	1800	1040	2080	1250	2500

Please Observe: To determine the coupling torque, observe the "ROBA®-ES Coupling Dimensioning" starting on page 22!

Spring rigidity¹⁾

Size	Torsional spring rigidity								Radial spring rigidity				
	static C _{T stat.}			dynamic C _{T dyn}			relative C _{T H rel.}		static C _r				
	80 Sh A	92 Sh A	98 Sh A	64 Sh D	80 Sh A	92 Sh A	98 Sh A	64 Sh D	Sleeve	80 Sh A	92 Sh A	98 Sh A	64 Sh D
	[Nm/rad.]								[10 ⁶ Nm mm/rad.]	[N/mm]			
14	50	80	120	230	120	240	300	730	0.65	180	300	470	960
19	350	820	900	1400	1050	1800	2200	4200	2.18	700	1200	2100	2700
24	820	2300	3700	4500	1300	4800	7600	10800	6.26	800	1900	2800	4200
28	1300	3800	4200	7000	2200	6800	10100	17200	11.15	950	2100	3500	4900
38	2000	5600	7400	9000	3400	11900	19900	30500	18.11	1300	2900	4800	5600
42	3500	9800	13800	15000	5950	20500	31100	64900	109.66	3400	4100	5400	6900
48	4300	12000	15100	28500	7300	22800	44900	102800	254.50	3750	4500	6200	8200
55	5100	14200	20500	56300	8300	25800	48200	117400	421.75	4730	5680	8200	22500
65	6800	19100	32800	90200	11500	36200	67400	164000	555.18	6360	7640	13120	36000
Only for type 940..11.P													
14-32	50	80	120	230	120	240	300	730	-	180	300	470	960
19-37,5	280	660	720	1120	840	1440	1760	3360	-	560	960	1680	2160
24-50	600	1700	2700	3300	1000	3600	5700	8100	-	600	1500	2100	3200

1) The C_r-value of a double-jointed coupling can be roughly calculated as follows:

$$C_{T \text{ ges.}} = \frac{1}{\frac{2}{C_T} + \frac{H_s [\text{mm}] - 2 E [\text{mm}]}{C_{T \text{ H rel.}}}}$$


Technical Explanations

Permitted Misalignment Values

Size	Shaft misalignments Basic Type																
	Axial		Radial			Angular											
	ΔK_a 80/92 Sh A 98/64 Sh D	[mm]	ΔK_r 80 Sh A	[mm]	ΔK_r 92 Sh A	[mm]	ΔK_r 98 Sh A	[mm]	ΔK_r 64 Sh D	[mm]	ΔK_w 80 Sh A	[°]	ΔK_w 92 Sh A	[°]	ΔK_w 98 Sh A	[°]	ΔK_w 64 Sh D
Misalignment values Basic Type																	
14	1.0	0.21	0.15	0.09	0.06	1.1	1.0	0.9	0.8								
19	1.2	0.15	0.1	0.06	0.04	1.1	1.0	0.9	0.8								
24	1.4	0.18	0.14	0.1	0.07	1.1	1.0	0.9	0.8								
28	1.5	0.2	0.15	0.11	0.08	1.3	1.0	0.9	0.8								
38	1.8	0.22	0.17	0.12	0.09	1.3	1.0	0.9	0.8								
42	2.0	0.24	0.19	0.14	0.1	1.3	1.0	0.9	0.8								
48	2.1	0.26	0.21	0.16	0.11	1.3	1.0	0.9	0.8								
55	2.2	0.28	0.24	0.17	0.12	1.3	1.0	0.9	0.8								
65	2.6	0.3	0.25	0.18	0.13	1.3	1.0	0.9	0.8								
Only available on P-design																	
14-32	1.0	0.21	0.15	0.09	0.06	1.1	1.0	0.9	0.8								
19-37,5	1.2	0.15	0.1	0.06	0.04	1.1	1.0	0.9	0.8								
24-50	1.4	0.18	0.14	0.1	0.07	1.1	1.0	0.9	0.8								
Misalignment values with connection piece																	
										per side							
14	2.0	0.42	0.30	0.18	0.12	1.1	1.0	0.9	0.8								
19	2.4	0.3	0.20	0.12	0.08	1.1	1.0	0.9	0.8								
24	2.8	0.36	0.28	0.20	0.14	1.1	1.0	0.9	0.8								
28	3.0	0.4	0.30	0.22	0.16	1.3	1.0	0.9	0.8								
38	3.6	0.44	0.34	0.24	0.18	1.3	1.0	0.9	0.8								
42	4.0	0.48	0.38	0.28	0.20	1.3	1.0	0.9	0.8								
48	4.2	0.52	0.42	0.32	0.22	1.3	1.0	0.9	0.8								
55	4.4	0.56	0.48	0.34	0.24	1.3	1.0	0.9	0.8								
65	5.2	0.6	0.50	0.36	0.26	1.3	1.0	0.9	0.8								
Misalignment values with sleeve																	
		$(L_3 - 2 \times l_1 - E) \times A$ (Calculation factor)								per side							
14	2.0	A = 0.0097	A = 0.0087	A = 0.0079	A = 0.0070	1.1	1.0	0.9	0.8								
19	2.4					1.1	1.0	0.9	0.8								
24	2.8					1.1	1.0	0.9	0.8								
28	3.0					1.3	1.0	0.9	0.8								
38	3.6					1.3	1.0	0.9	0.8								
42	4.0					1.3	1.0	0.9	0.8								
48	4.2					1.3	1.0	0.9	0.8								
55	4.4	A = 0.0113				1.3	1.0	0.9	0.8								
65	5.2					1.3	1.0	0.9	0.8								

Technical Explanations

Permitted Speeds (critical bending speed) for Sleeve

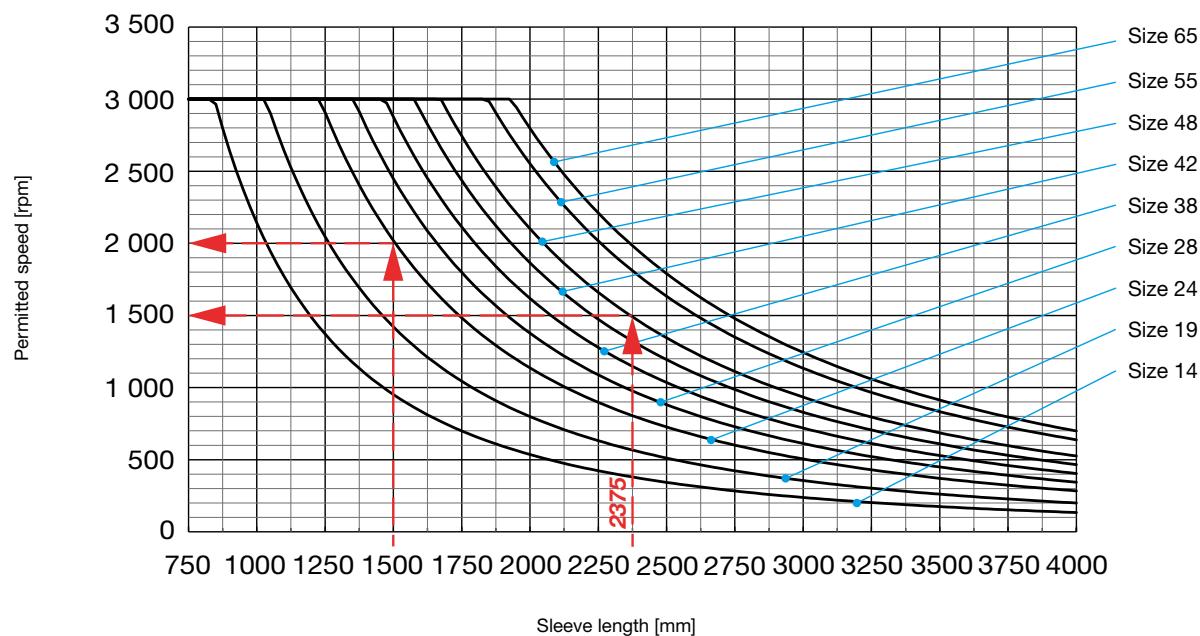

Examples

- ROBA®-ES, Size 48:

Sleeve length: $H_s = 2375 \text{ mm}$
 \Rightarrow permitted speed: **1500 rpm**

- ROBA®-ES, Size 24:

Sleeve length: $H_s = 1500 \text{ mm}$
 \Rightarrow permitted speed: **2000 rpm**

Using the coupling at high speeds

- Please keep to the maximum speeds defined in the catalogue. Higher speeds are only permitted after contacting the manufacturers.
- Please operate designs with sleeve at subcritical levels.
- Both hub variants clamping hub and split clamping hub may only be used within a limited speed range. At very high speeds, shrink disk hubs and key hubs (press fit) should be used.
- We recommend balancing the coupling in individual parts or complete.
- Shaft misalignments should be kept as low as possible to increase the smooth running of a system.
- When using double cardanic shafts, axial animation of the middle coupling part is possible due to operating speed and misalignment. In order to avoid this animation, please minimise the shaft misalignment.

Technical Explanations

Transmittable Torques

Shrink disk hubs made of aluminium Type 940_11.A		Bore	Size					
			14	19	24	28	38	
Frictionally-locking Transmittable torques Shrink disk hubs made of aluminium Suitable for H7 / k6 With larger fit clearance, the transmittable torque is reduced.	T _R [Nm]	Ø6	7	-	-	-	-	
		Ø7	9	-	-	-	-	
		Ø8	11	-	-	-	-	
		Ø9	13	-	-	-	-	
		Ø10	15	33	-	-	-	
		Ø11	17	38	-	-	-	
		Ø14	24	55	-	-	-	
		Ø15	-	61	56	-	-	
		Ø16	-	67	62	-	-	
		Ø17	-	73	68	-	-	
		Ø18	-	78	74	-	-	
		Ø19	-	84	81	141	-	
		Ø20	-	88	87	153	197	
		Ø22	-	-	100	177	228	
		Ø24	-	-	120	203	261	
		Ø25	-	-	125	216	279	
		Ø28	-	-	135	256	332	
		Ø30	-	-	-	282	368	
		Ø32	-	-	-	308	405	
		Ø35	-	-	-	343	460	
		Ø38	-	-	-	373	513	
		Ø40	-	-	-	-	547	
		Ø42	-	-	-	-	577	
		Ø45	-	-	-	-	617	
Shrink disk hubs made of steel Type 940_11.P		Bore	Size					
			14-32	19-37,5	19	24-50	24	
Frictionally-locking Transmittable torques Shrink disk hubs made of steel Suitable for H6 / k6 With larger fit clearance, the transmittable torque is reduced.	T _R [Nm]	Ø6	7	-	-	-	-	
		Ø7	9	-	-	-	-	
		Ø8	11	-	-	-	-	
		Ø9	13	-	-	-	-	
		Ø10	15	26	33	-	-	
		Ø11	17	30	38	-	-	
		Ø14	25	45	55	-	-	
		Ø15	-	50	61	45	56	
		Ø16	-	60	67	50	62	
		Ø17	-	-	73	54	68	
		Ø18	-	-	78	60	74	
		Ø19	-	-	84	65	81	
		Ø20	-	-	88	70	141	
		Ø22	-	-	-	85	153	
		Ø24	-	-	-	100	177	
		Ø25	-	-	-	112	228	
		Ø28	-	-	-	125	261	
		Ø30	-	-	-	135	279	
		Ø32	-	-	-	-	332	
		Ø35	-	-	-	-	368	
		Ø38	-	-	-	-	405	
		Ø40	-	-	-	-	460	
		Ø42	-	-	-	-	513	
		Ø45	-	-	-	-	547	
		-	-	-	-	-	577	
		-	-	-	-	-	617	
Shrink disk hubs made of steel Type 940_11.F		Bore	Size					
			42	48	55	65		
Frictionally-locking Transmittable torques Shrink disk hubs made of steel Suitable for H7 / k6 With larger fit clearance, the transmittable torque is reduced.	T _R [Nm]	Ø28	300	-	-	-	-	
		Ø30	350	-	-	-	-	
		Ø32	400	-	-	-	-	
		Ø35	500	450	-	-	-	
		Ø38	600	500	-	-	-	
		Ø40	680	600	723	-	-	
		Ø42	730	720	814	-	-	
		Ø45	790	850	946	1402		
		Ø48	850	1000	1085	1596		
		Ø50	880	1180	1187	1731		
		Ø52	-	1270	1284	1873		
		Ø55	-	1353	1436	2095		
		Ø58	-	1428	1585	2308		
		Ø60	-	1471	1682	2420		
		Ø62	-	-	1795	2570		
		Ø65	-	-	1943	2750		
		Ø68	-	-	2100	2989		
		Ø70	-	-	2207	3157		
		Ø72	-	-	-	3306		
		Ø75	-	-	-	-	3550	

Technical Explanations

Transmittable Torques

Clamping hubs Type 94_._00._		Bore	Size								
			14	19	24	28	38	42	48	55	65
Frictionally-locking Transmittable torques Clamping hubs	T_R [Nm]	Ø6	2.5	-	-	-	-	-	-	-	-
		Ø7	3.0	-	-	-	-	-	-	-	-
		Ø8	3.4	-	-	-	-	-	-	-	-
		Ø9	3.8	-	-	-	-	-	-	-	-
		Ø10	4.2	23	-	-	-	-	-	-	-
		Ø11	4.7	25	-	-	-	-	-	-	-
		Ø12	5.1	27	-	-	-	-	-	-	-
		Ø14	6.0	32	-	-	-	-	-	-	-
		Ø15	6.4	34	34	-	-	-	-	-	-
		Ø16	-	36	36	-	-	-	-	-	-
		Ø18	-	41	41	-	-	-	-	-	-
		Ø19	-	43	43	79	-	-	-	-	-
		Ø20	-	45	45	83	83	-	-	-	-
		Ø22	-	-	50	91	91	-	-	-	-
		Ø24	-	-	54	100	100	-	-	-	-
		Ø25	-	-	57	104	104	-	-	-	-
		Ø28	-	-	63	116	116	208	-	-	-
		Ø30	-	-	-	124	124	228	-	-	-
		Ø32	-	-	-	133	133	248	-	-	-
		Ø35	-	-	-	145	145	280	350	-	-
		Ø38	-	-	-	-	158	315	390	-	-
		Ø40	-	-	-	-	166	340	420	340	-
		Ø42	-	-	-	-	174	365	455	365	-
		Ø45	-	-	-	-	187	404	505	405	545
		Ø48	-	-	-	-	-	442	560	435	590
		Ø50	-	-	-	-	-	470	600	465	630
		Ø52	-	-	-	-	-	-	640	490	662
		Ø55	-	-	-	-	-	-	705	525	710
		Ø58	-	-	-	-	-	-	-	570	764
		Ø60	-	-	-	-	-	-	-	600	800
		Ø62	-	-	-	-	-	-	-	625	840
		Ø65	-	-	-	-	-	-	-	665	900
		Ø68	-	-	-	-	-	-	-	700	954
		Ø70	-	-	-	-	-	-	-	740	990
		Ø72	-	-	-	-	-	-	-	-	1032
		Ø75	-	-	-	-	-	-	-	-	1095
		Ø78	-	-	-	-	-	-	-	-	1158
		Ø80	-	-	-	-	-	-	-	-	1200

Clamping hubs Compact Type 94_._55._		Bore	Size				
			14	19	24	28	38
Frictionally-locking Transmittable torques Clamping hubs Compact	T_R [Nm]	Ø5	5				
		Ø6	6				
		Ø7	7				
		Ø8	8	18			
		Ø9	9	20			
		Ø10	10	23	23		
		Ø11	11	25	25		
		Ø12	12	27	27		
		Ø13	29	29			
		Ø14	32	32	58		
		Ø15	34	34	62	98	
		Ø16	36	36	66	105	
		Ø17	38	38	71	110	
		Ø18	41	41	75	118	
		Ø19	43	43	79	124	
		Ø20	45	45	83	131	
		Ø21	48	48	87	137	
		Ø22	50	50	91	144	
		Ø23	52	52	95	150	
		Ø24	54	54	100	157	
		Ø25	57	57	104	163	
		Ø26	59	59	108	170	
		Ø27	61	61	112	176	
		Ø28	63	63	116	183	
		Ø29	66	66	120	190	
		Ø30	68	68	124	196	
		Ø31	70	70	129	203	
		Ø32	72	72	133	209	
		Ø33			137	216	
		Ø34			141	222	
		Ø35			145	229	
		Ø36				235	
		Ø37				242	
		Ø38				248	
		Ø39				255	
		Ø40				261	
		Ø41				268	
		Ø42				274	
		Ø43				281	
		Ø44				288	
		Ø45				294	

Technical Explanations

Transmittable Torques

Split Clamping Hubs Type 94_.33._		Bore	Size								
			14	19	24	28	38	42	48	55	65
Ø8	4	18									
Ø9	4.5	20									
Ø10	5	23	23								
Ø11	5.5	25	25								
Ø12	6	27	27								
Ø13	6.5	29	29								
Ø14	7	32	32	58							
Ø15	7.5	34	34	62							
Ø16		36	36	66							
Ø17		38	38	71							
Ø18		41	41	75	75						
Ø19		43	43	79	79						
Ø20		45	45	83	83						
Ø21			48	87	87						
Ø22			50	91	91	144	210				
Ø23			52	95	95	150	220				
Ø24			54	100	100	157	229				
Ø25			57	104	104	163	239				
Ø26			59	108	108	170	248				
Ø27			61	112	112	176	258				
Ø28			63	116	116	183	267				
Ø29				120	120	190	277				
Ø30				124	124	196	287				
Ø31				129	129	203	296				
Ø32				133	133	209	306				
Ø33				137	137	216	315				
Ø34				141	141	222	325				
Ø35				145	145	229	334				
Ø36					149	235	344				
Ø37					153	242	353				
Ø38					158	248	363				
Ø39					162	255	372				
Ø40					166	261	382	382			
Ø41					170	268	392	392			
Ø42					174	274	401	401			
Ø43					178	281	411	411			
Ø44					182	288	420	420			
Ø45					187	294	430	430	430		
Ø46						301	439	439	439		
Ø47						307	449	449	449		
Ø48						314	458	458	458		
Ø49						320	468	468	468		
Ø50						327	478	478	478		
Ø51							487	487	487		
Ø52							497	497	497		
Ø53							506	506	506		
Ø54							516	516	516		
Ø55							525	525	525		
Ø56								535	535		
Ø57								544	544		
Ø58									554	554	
Ø59									563	563	
Ø60									573	573	
Ø61									583	583	
Ø62									592	592	
Ø63									602	602	
Ø64										611	611
Ø65										621	621
Ø66										630	630
Ø67										640	640
Ø68										649	649
Ø69										659	659
Ø70										669	669
Ø71											678
Ø72											688
Ø73											697
Ø74											707
Ø75											716
Ø76											726
Ø77											735
Ø78											745
Ø79											755
Ø80											764

Expansion hubs Type 94_.4_.		Bore	Size			
			14	19	24	28
Frictionally-locking Transmittable torques		Ø12	15.7			
Suitable for F7 / h7		Ø20		36.6		
Expansion hubs made of steel		Ø25			84.4	
		Ø35				188

Technical Explanations

ROBA®-ES stands for flexible (E), backlash-free (S) shaft coupling. The device consists of two coupling hubs and a flexible, star-shaped intermediate ring (Fig. 1).

ROBA®-ES couplings are conceived specially for backlash-free operation at comparatively high speeds.

ROBA®-ES couplings are mainly used in measurement and control engineering as well as in control and process engineering.

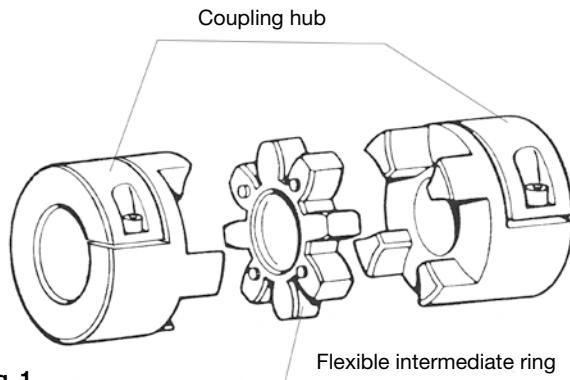


Fig. 1

Shaft Misalignments

The ROBA®-ES coupling compensates for radial, axial and angular shaft misalignments (Fig. 3) without losing their backlash-free function. However, the permitted misalignments indicated on page 25 must not simultaneously reach their maximum value. If more than one kind of misalignment takes place simultaneously, they influence each other. This means that the permitted misalignment values are dependent on one another, see Fig. 2. The sum total of the actual misalignments – in percent of the maximum value – must not exceed 100 %.

The permitted misalignment values given on page 25 refer to coupling operation at nominal torque, an ambient temperature of +30 °C and an operating speed of 1500 rpm.


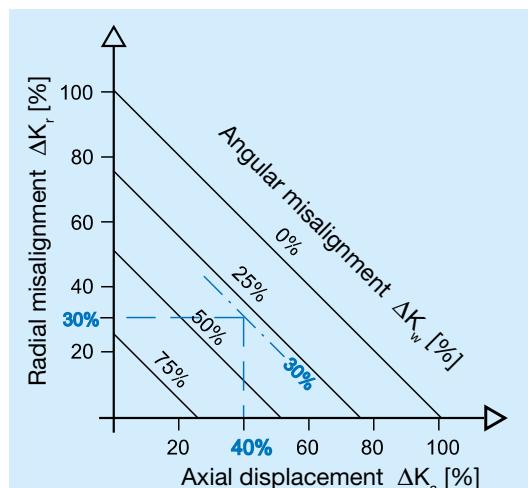


Fig. 2

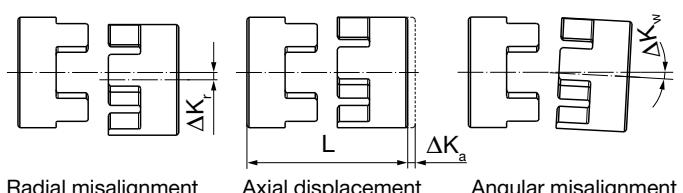

Radial misalignment Axial displacement Angular misalignment

Fig. 3

Technical Explanations

State of Delivery

ROBA®-ES couplings are delivered manufacturer-assembled ready for installation.

The star-shaped intermediate ring is pressed into the specially designed claws (Fig. 4) under light pre-tension.

The principle of backlash-free torque transmission is possible due to this pre-tension.

ROBA®-ES couplings are delivered in four torque variations; that is with four different flexible intermediate rings varying in shore hardness and colour (see Type key page 24).

Due to the small structural dimensions and therefore the low mass moments of inertia, the device allows itself to be installed even into small installation spaces.

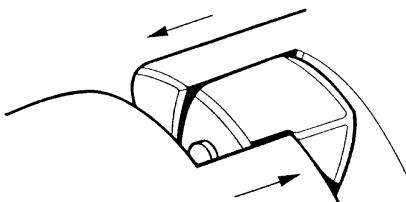


Fig. 4

Balancing

Key hubs and clamping hubs:

Key hubs and clamping hubs rotate at maximum speed with a circumferential speed of 30 m/s. They are not balanced for standard delivery.

Shrink disk hubs:

Shrink disk hubs maintain balance quality $G = 6.3$ up to speed n_G (equals approx. 30 m/s) without needing to be balanced. Above this speed, we recommend balancing. The hubs are balanced individually. Diagram 1 shows reference values. We recommend you use these values to balance the coupling components.

Smooth running of a machine or system is not only dependent on the balance quality of the coupling, but also on many parameters such as rigidity or distance to the adjacent bearing. Therefore there are no fixed rules in which conditions you have to balance.

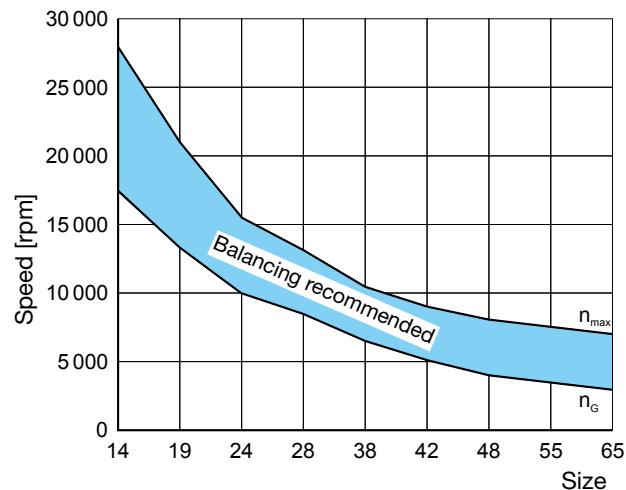


Diagram 1: Balancing the Shrink Disk Hubs



Chr. Mayr GmbH + Co. KG
Eichenstraße 1, D-87665 Mauerstetten
Tel.: +49 83 41/8 04-0, Fax: +49 83 41/80 44 21
www.mayr.com, E-Mail: info@mayr.com



Service Germany/Austria

Baden-Württemberg
 Esslinger Straße 7
 70771 Leinfelden-Echterdingen
 Tel.: 07 11/78 26 26 40
 Fax: 07 11/78 26 26 39

Bavaria
 Industriestraße 51
 82194 Gröbenzell
 Tel.: 0 81 42/50 19 80-7

Chemnitz
 Bornaeer Straße 205
 09114 Chemnitz
 Tel.: 03 71/4 74 18 96
 Fax: 03 71/4 74 18 95

Franken
 Unterer Markt 9
 91217 Hersbruck
 Tel.: 0 91 51/81 48 64
 Fax: 0 91 51/81 62 45

Kamen
 Herbert-Wehner-Straße 2
 59174 Kamen
 Tel.: 0 23 07/24 26 79
 Fax: 0 23 07/24 26 74

North
 Schiefer Brink 8
 32699 Extertal
 Tel.: 0 57 54/9 20 77
 Fax: 0 57 54/9 20 78

Rhine-Main
 Kreuzgrundweg 3a
 36100 Petersberg
 Tel.: 06 61/96 21 02 15

Austria
 Pummerinplatz 1, TIZ I, A27
 4490 St. Florian, Austria
 Tel.: 0 72 24/2 20 81-12
 Fax: 0 72 24/2 20 81 89

Branch office

China
 Mayr Zhangjiagang
 Power Transmission Co., Ltd.
 Fuxin Road No.7, Yangshe Town
 215637 Zhangjiagang
 Tel.: 05 12/58 91-75 67
 Fax: 05 12/58 91-75 66
 info@mayr-ptc.cn

Great Britain
 Mayr Transmissions Ltd.
 Valley Road, Business Park
 Keighley, BD21 4LZ
 West Yorkshire
 Tel.: 0 15 35/66 39 00
 Fax: 0 15 35/66 32 61
 sales@mayr.co.uk

France
 Mayr France S.A.S.
 Z.A.L. du Minopole
 Rue Nungesser et Coli
 62160 Bally-Les-Mines
 Tel.: 03.21.72.91.91
 Fax: 03.21.29.71.77
 contact@mayr.fr

Italy
 Mayr Italia S.r.l.
 Viale Veneto, 3
 35020 Saonara (PD)
 Tel.: 049/879 10 20
 Fax: 049/879 10 22
 info@mayr-italia.it

Singapore
 Mayr Transmission (S) PTE Ltd.
 No. 8 Boon Lay Way Unit 03-06,
 TradeHub 21
 Singapore 609964
 Tel.: 00 65/65 60 12 30
 Fax: 00 65/65 60 10 00
 info@mayr.com.sg

Switzerland
 Mayr Kupplungen AG
 Tobeläckerstraße 11
 8212 Neuhausen am Rheinfall
 Tel.: 0 52/6 74 08 70
 Fax: 0 52/6 74 08 75
 info@mayr.ch

USA
 Mayr Corporation
 10 Industrial Avenue
 Mahwah
 NJ 07430
 Tel.: 2 01/4 45-72 10
 Fax: 2 01/4 45-80 19
 info@mayrcorp.com

Turkey
 Representative Office Turkey
 Kucukbakkalkoy Mah.
 Brandium Residence R2
 Blok D:254
 34750 Atasehir - Istanbul, Turkey
 Tel.: 02 16/2 32 20 44
 Fax: 02 16/5 04 41 72
 info@mayr.com.tr

Representatives

Australia
 Drive Systems Pty Ltd.
 8/32 Melverton Drive
 Hallam, Victoria 3803
 Australien
 Tel.: 0 3/97 96 48 00
 info@drivesystems.com.au

India
 National Engineering
 Company (NENCO)
 J-225, M.I.D.C.
 Bhosari Pune 411026
 Tel.: 0 20/27 13 00 29
 Fax: 0 20/27 13 02 29
 nenco@nenco.org

Japan
 MATSUI Corporation
 2-4-7 Azabudai
 Minato-ku
 Tokyo 106-8641
 Tel.: 03/35 86-41 41
 Fax: 03/32 24 24 10
 info@matsui-corp.co.jp

Netherlands
 Groneman BV
 Amarstraat 11
 7554 TV Hengelo OV
 Tel.: 074/2 55 11 40
 Fax: 074/2 55 11 09
 aandrijftechniek@groneman.nl

Poland
 Wamex Sp. z o.o.
 ul. Pozaryskiego, 28
 04-703 Warszawa
 Tel.: 0 22/6 15 90 80
 Fax: 0 22/8 15 61 80
 wamex@wamex.com.pl

South Korea
 Mayr Korea Co. Ltd.
 15, Yeondeok-ro 9beon-gil
 Seongsan-gu
 51571 Changwon-si
 Gyeongsangnam-do, Korea
 Tel.: 0 55/2 62-40 24
 Fax: 0 55/2 62-40 25
 info@mayrkorea.com

Taiwan
 German Tech Auto Co., Ltd.
 No. 28, Fenggong Zhong Road,
 Shengang Dist.,
 Taichung City 429, Taiwan R.O.C.
 Tel.: 04/25 15 05 66
 Fax: 04/25 15 24 13
 abby@zfgta.com.tw

Czech Republic
 BMC - TECH s.r.o.
 Hvězdoslavova 29 b
 62700 Brno
 Tel.: 05/45 22 60 47
 Fax: 05/45 22 60 48
 info@bmc-tech.cz

More representatives:

Belgium, Brazil, Canada, Colombia, Croatia, Denmark, Finland, Greece, Hongkong, Hungary, Indonesia, Israel, Luxembourg, Malaysia, Mexico, New Zealand, Norway, Philippines, Portugal, Romania, Russia, Slovakia, Slovenia, South Africa, Spain, Sweden, Thailand

You can find the complete address for the representative responsible for your area under www.mayr.com in the internet.