

The Backlash-free Safety Clutch for

*Packaging Machinery
Machine Tools
Paper Machinery
Indexing Drives
Servo Motors*



EAS[®] - NC

Backlash-free Safety Clutch

- *Indicating torque adjustment*
- *Easy assembly*
- *Hardened functional components*
- *Synchronous and Ratchetting design*

www.mayr.de[®]

K.405.V06.GB

mayr[®]
power-
transmission

EAS[®]-NC Clutches optimum overload protection for your machinery.

EAS[®]-NC Torque Limiting Clutches guarantee economic protection and reliable operation, in order to maximise utilisation of machinery and equipment.

The continually increasing electric requirements in the power transmission for dynamics, higher speeds and accuracy can be met by using EAS[®]-NC Clutches.

With its optimum design principles and simple mechanics, EAS[®]-NC Clutches can withstand the extreme operating conditions. EAS[®]-NC Clutches provide zero backlash torque transmission characteristics and limit the transmitted torque exactly to a pre-set value.

In case an overload condition occurs in the drive train, due to a blockage or collision for example, the clutch will disengage, disconnecting input and output, thus uncoupling up to 90 % of the damaging energy in the system, which, if not disconnected, would cause costly damage and down-time to the machine.

Advantages for your application

The EAS[®]-NC Torque Limiting Clutch is the ideal overload protection for your machine:

- Precise torque limitation prevents costly downtime and repairs in the event of an overload.
- Backlash-free torque transmission guarantees the highest drive accuracy and service life.
- Backlash-free function remains throughout the machine's life.
- High speed and high acceleration obtained through low inertia design.
- Immediate disconnection of input and output drive components prevents costly machine damage.
- The versatility of the design ensures a suitable solution for every application.
- Graduated torque setting eliminates operating errors.
- Low operating expenses through a maintenance-free principle.
- Immediate readiness for use after an overload has occurred, minimising machine downtime.

Please Observe:

According to Germany notation, decimal point in this document are represented with a comma.
(e.g. 0,5 instead of 0.5)



EAS[®]-NC Lastic Backlash-free version in a directly driven servo axis. This combination limits the torque precisely to the pre-set value, compensates for shaft misalignments and damps critical vibrations.

Fast mechanical torque limiting even with electronic current monitoring systems.

Although most modern electronic systems are used for control and monitoring, blockages and collisions cannot be completely prevented. False initial start programming errors or operating errors outwit the most sophisticated control concepts. Modern electronic controls are designed with an excess-current release, which should prevent damage due to operating errors.

This type of overload protection has a considerable disadvantage which can be compensated for by a fast mechanical torque limiting safety clutch. Valuable time is lost between collision occurring until the drive motor or equipment is switched off. If a blockage occurs in the drive line the torque increases together with the motor current, and the whole drive system becomes tensioned. This overload situation can cause acute instantaneous damage before the control system registers the current rise and switches off the drive.


This gives the EAS[®]-NC Torque Limiting Clutch with its mechanical overload protection a decisive advantage. The damaging kinetic energies are uncoupled and released already within a few milliseconds and, as a limit switch can detect the disengaging movement of the clutch, a signal can be used to completely stop the machine or equipment.

Save time on selection and construction

Reduce your costs for product selection and construction to a minimum using our CD-ROM (**mayr®**-ROM) or our internet page (www.mayr.de), with:

- selection programme
- documentation as PDF
- CAD drawings as DXF and
- queries or order possibilities

Please visit our internet page (www.mayr.de) or ask for our CD-ROM (**mayr®**-ROM)!
Telephone 08341/804-0.

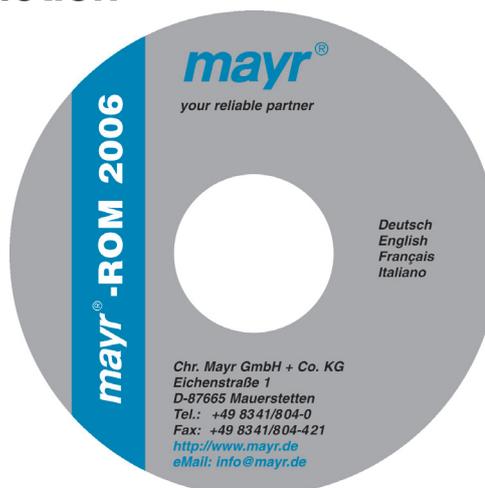

Quality, experience, competence

mayr®-drive technology has set the standards for innovative and technically economical solutions for decades. The reasons for this success are, as well as many other factors, the highest product quality and the highly-developed quality consciousness of our employees.

Our certification according to DIN EN ISO 9001:2000 and DIN EN ISO 14001 confirm the high demands which we place upon ourselves. With our polished quality management, our renowned high product quality, our years of experience and the know-how gathered during this time, we are able to offer you comprehensive competence worthy of your trust in the fields of mechanics and electronics.



Further products in the EAS®-programme:

EAS®-Compact-R

Only corrosion-protected safety clutches are suitable for critical conditions with wet ambient conditions or aggressive mediums. Our product selection ranges from open designs made of stainless steel to sealed, rust-proof clutches or units for integration between the motor and the gearbox.

EAS®-Sp / EAS®-Sm / EAS®-Zr

Pneumatically or electromagnetically controlled torque limiting clutches with a complete disengage, remote-control on-off clutching function. Torque adjustable to suit varied operating conditions.

EAS®-element clutch / EAS®-element

EAS®-element based EAS®-element clutches for high torque applications (0,25–190 kNm). Basic elements can be integrated into existing constructions and offer flexibility of design to suit specific applications.

EAS®-axial

Linear motion overload protection. Tensile and compressive forces monitored via unique compact mechanical element. Eight sizes cover forces between 50 and 300 000 N in 12 variations in type and design.

Indicated torque adjustment

- ❑ The torque can be adjusted sensitively and accurately indicated by the fine pitch threaded graduated adjusting nut.
- ❑ The positive locking of the adjusting nut protects against self-acting unintended adjustment of the pre-set limiting torque. For the NC-sizes 4 to 6 there is an additional mechanical lock and back drive locking.

Torque limitation


- ❑ Adjustable torques are transmitted via balls placed in two geometrical defined seats from hub to pressure flange.
- ❑ The balls ratchet out of seats when the pre-set limiting torque is exceeded.

Pressure flange

- ❑ Axially and radially supported by a deep groove ball bearing.
- ❑ Precise connection and axial location of the drive element.

Easy torque adjustment

Limit switch




- ❑ Extreme short switch-off times
- ❑ Precise connection and axial point adjustment

Signal usage




- ❑ In the event of an overload the limit switch detects the axial disengaging movement of the thrust ring quickly and precisely.
- ❑ The limit switch gives a signal for switching off the drive or other control function.

engaged



disengaged




The patented backlash-free principle


The backlash-free torque transmission

- ❑ Balls located in **radially and axially arranged recesses** on the hub and pressure flange.
- ❑ The balls are pressed by the thrust ring **simultaneously into the recesses of the hub and pressure flange** and, therefore, transmit the torque backlash-free in both directions of rotation, even with reversing direction of rotation.
- ❑ Consistent and precise torque decrease in the event of an overload due to *mayr*[®] cup springs with degressive spring characteristic.

EAS[®]-NC torque limiting clutch

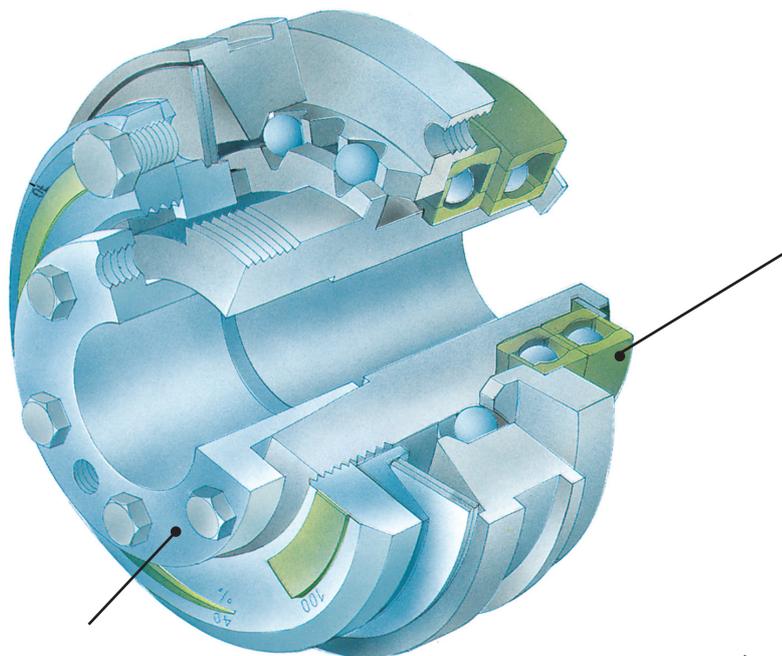

Backlash-free shaft-hub connection via cone bushing

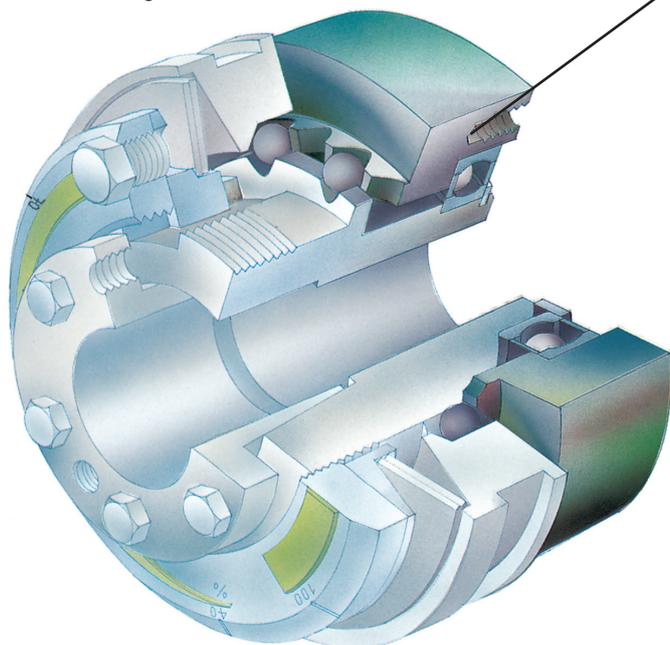

EAS[®]-NC variations

EAS[®]-NC Type 450 Design .2


Clutch with special hub variations for fitting of wide drive elements to customer requirements.

- Stable double bearing
- Ready for attachment
- High degree of true running accuracy

EAS[®]-NC Type 451


The EAS[®]-NC principle with the mounting dimensions of our well proven EAS[®]-Type series 400.

- Backlash-free
- Roller bearing in the pressure flange
- High degree of switching-off accuracy
- Degressive spring characteristic

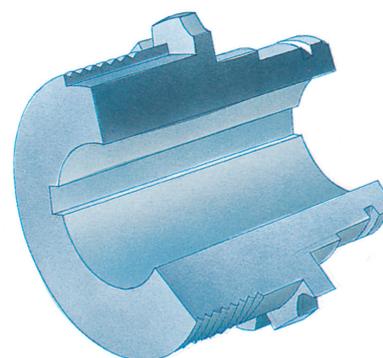


EAS[®]-NC hub with positive shaft-hub connection

EAS[®]-NC - the backlash-free principle

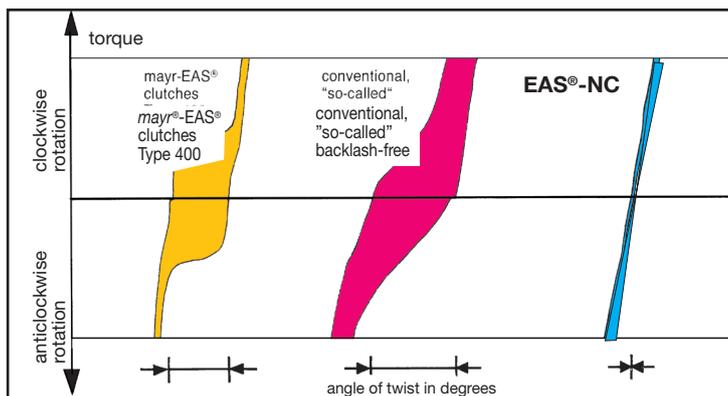


Backlash is:

- The angular tolerance between input and output clutch components.
- Also known as circumferential backlash.
- Not to be mistaken for transmitting backlash from shaft to hub.
- With mayr[®] backlash-free means: backlash → 0 (see graph).**



Switching behaviour

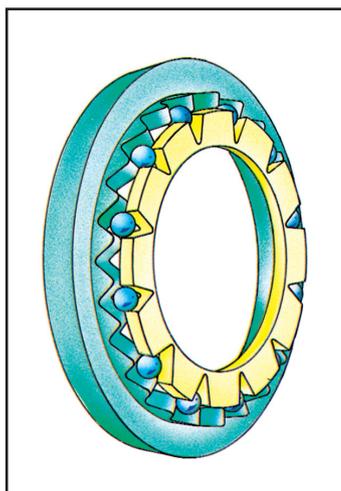


Operating principle of the mayr[®]-EAS[®]-NC ratchetting clutch

- ❑ When the pre-set limiting torque is achieved, the torque drops immediately.
- ❑ The EAS[®]-NC ratchetting clutch ratchets and re-engages automatically at the next convenient ball detent after removal of the overload.
- ❑ The mayr[®] limit switch switches off the drive immediately
- ❑ or makes another control function.

The backlash-free torque transmitting safety clutch



- ❑ Uniform and constant torque transmission due to precision manufacture of the ball detents.
- ❑ Clean and precise torque adjustment due to graduated, readable adjusting nut.
- ❑ In the event of an overload:
 - * rapid torque decrease
 - * signal for equipment control
- ❑ The EAS[®]-NC ratchetting clutch guarantees an immediate readiness for operation of the machine and equipment after removal of the overload.
- ❑ Reliable collision protection e.g. in feed drives of machine tools.

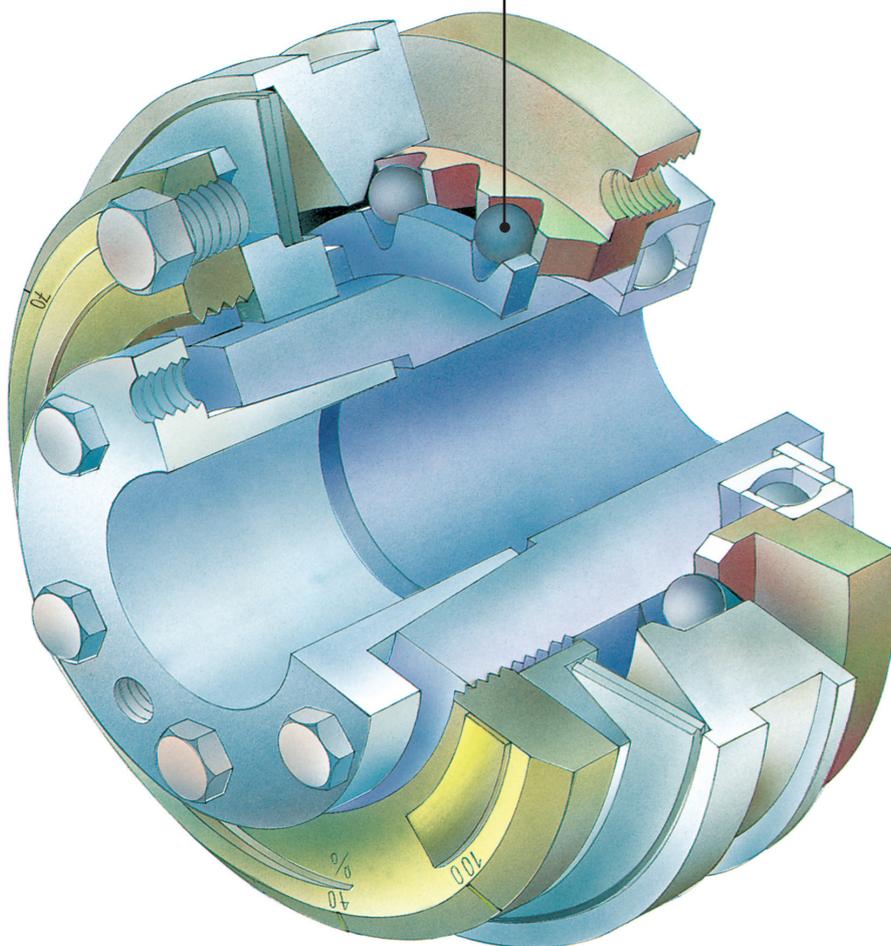

EAS[®]-NC synchronous clutch

Operating principle of the *mayr*[®]-EAS[®]-NC synchronous clutch

- ❑ The EAS[®]-NC synchronous clutch disengages when the pre-set limiting torque is achieved.
- ❑ After removal of the overload the clutch re-engages automatically synchronously at 360°. Other cycles, for example 180°, are also available.

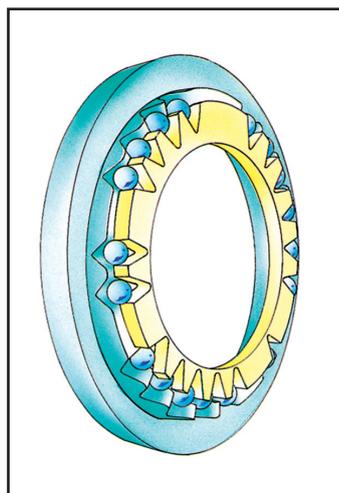

switching behaviour

- ❑ Re-engagement is only guaranteed at a certain position due to the special *mayr*[®] synchronous geometry of the *mayr*[®]-precision balls and ball detents.
- ❑ Uniform and constant torque transmission.
- ❑ Versatile tuning controls for cycles are possible, for example
 - * transfer points
 - * feed systems
 - * handling systems.
- ❑ Clean and precise torque adjustment due to graduated, readable adjusting nut.
- ❑ In the event of an overload:
 - * immediate torque reduction
 - * control signal
 - * synchronous re-engagement
 - * reliable collision and overload protection






mayr[®]-EAS[®]-NC safety clutch in machines and equipment

- reduces downtimes
- increases availability
- increases productivity

a safety advantage for






- ... persons
- ... machines
- ... controls

Summary of types

EAS [®] -NC clutch	Type Size	Torque [Nm]	Application									
EAS[®]-NC short hub 	450.____.0 Sizes 03 – 3	0,65 – 450	Flanged torque limiting clutch backlash-free torque transmission between shaft and drive element. The torque is transmitted backlash-free until disengagement and reduces immediately when an overload occurs. Low mass moment of inertia. Automatic re-engagement. Long working life.									
<table border="1"> <tr> <td>Page 10</td> <td>with cone bushing</td> <td>Type 450._1_.0</td> </tr> <tr> <td>Page 11</td> <td>with keyway</td> <td>Type 450._2_.0</td> </tr> </table>				Page 10	with cone bushing	Type 450._1_.0	Page 11	with keyway	Type 450._2_.0			
Page 10	with cone bushing	Type 450._1_.0										
Page 11	with keyway	Type 450._2_.0										
EAS[®]-NC long projecting hub 	450.____.1 Sizes 03 – 3	0,65 – 450	Flanged torque clutch for backlash-free torque transmission between shaft and drive element. The torque is transmitted backlash-free until disengagement and reduces immediately when an overload occurs. Additional location of wide drive elements on a long hub through roll and slide bearing is possible. Low mass moment of inertia. Automatic re-engagement. Long working life.									
<table border="1"> <tr> <td>Page 12</td> <td>with cone bushing</td> <td>Type 450._1_.1</td> </tr> <tr> <td>Page 13</td> <td>with keyway</td> <td>Type 450._2_.1</td> </tr> </table>				Page 12	with cone bushing	Type 450._1_.1	Page 13	with keyway	Type 450._2_.1			
Page 12	with cone bushing	Type 450._1_.1										
Page 13	with keyway	Type 450._2_.1										
EAS[®]-NC two-bearings design 	450.____.2 Sizes 03 – 3	0,65 – 450	Flanged torque limiting clutch for backlash-free torque transmission between shaft and drive element. The torque is transmitted backlash-free until disengagement and reduces immediately when an overload occurs. EAS [®] -NC two-bearings version for direct stable location of the drive elements on the clutch, Low mass moment of inertia. Automatic re-engagement. Long working life.									
<table border="1"> <tr> <td>Page 14</td> <td>with cone bushing</td> <td>Type 450._1_.2</td> </tr> <tr> <td>Page 15</td> <td>with keyway</td> <td>Type 450._2_.2</td> </tr> </table>				Page 14	with cone bushing	Type 450._1_.2	Page 15	with keyway	Type 450._2_.2			
Page 14	with cone bushing	Type 450._1_.2										
Page 15	with keyway	Type 450._2_.2										
EAS[®]-NC with steel bellows coupling 	453.____.0 Sizes 03 – 3	0,65 – 450	Torque limiting clutch for backlash-free torque transmission between two coaxial shafts. The torque is transmitted backlash-free until disengagement and reduces immediately when an overload occurs. Low mass moment of inertia. Automatic re-engagement. Compensates axial, radial and angular misalignments. Long working life.									
<table border="1"> <tr> <td>Page 16</td> <td>with cone bushing</td> <td>Type 453._1_.0</td> </tr> <tr> <td>Page 17</td> <td>with keyway</td> <td>Type 453._2_.0</td> </tr> <tr> <td>Page 18</td> <td>with cone bushing/ clamping hub</td> <td>Type 453._3_.0</td> </tr> </table>				Page 16	with cone bushing	Type 453._1_.0	Page 17	with keyway	Type 453._2_.0	Page 18	with cone bushing/ clamping hub	Type 453._3_.0
Page 16	with cone bushing	Type 453._1_.0										
Page 17	with keyway	Type 453._2_.0										
Page 18	with cone bushing/ clamping hub	Type 453._3_.0										
EAS[®]-NC lastic backlash-free 	454.____.____ Sizes 01 – 3	4 – 450,	Torque limiting clutch for flexible, backlash-free torque transmission between two coaxial shafts. The torque is transmitted backlash-free until disengagement and reduces immediately when an overload occurs. Automatic re-engagement. Compensates axial, radial and angular misalignments. High degree of damping characteristic - Long service life.									
<table border="1"> <tr> <td>Page 19</td> <td>with cone bushing/ clamping hub</td> <td>Type 454._0_.____</td> </tr> <tr> <td>Page 20</td> <td>with cone bushing/ shrink disc</td> <td>Type 454._1_.____</td> </tr> <tr> <td>Page 21</td> <td>with keyway</td> <td>Type 454._2_.____</td> </tr> </table>				Page 19	with cone bushing/ clamping hub	Type 454._0_.____	Page 20	with cone bushing/ shrink disc	Type 454._1_.____	Page 21	with keyway	Type 454._2_.____
Page 19	with cone bushing/ clamping hub	Type 454._0_.____										
Page 20	with cone bushing/ shrink disc	Type 454._1_.____										
Page 21	with keyway	Type 454._2_.____										


EAS[®]-NC ratchetting clutch/synchronous clutch

Summary of types

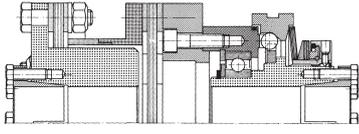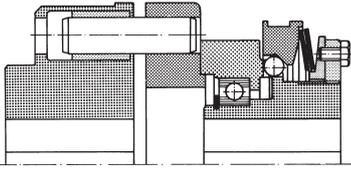EAS [®] -NC clutch	Type Size	Torque [Nm]	Application
EAS[®]-NC short hub with fitting dimensions of the type series 400 	451.____.0 Sizes 01 – 6	4 – 2400	Flanged torque limiting clutch for backlash-free torque transmission between shaft and drive element. The torque is transmitted backlash-free until disengagement and reduces immediately when an overload occurs. Low mass moment of inertia. Automatic re-engagement. Long working life. Page 22 with cone bushing Type 451._1_.0 Page 23 with keyway Type 451._2_.0
EAS[®]-NC with long projecting hub and fitting dimensions of the type series 400 	451.____.1 Sizes 01 – 6	4 – 2400	Additional location of wide drive elements on a long hub through roll and slide bearing is possible. Low mass moment of inertia. Automatic re-engagement. Long working life. Page 24 with cone bushing Type 451._1_.1 Page 25 with keyway Type 451._2_.1
EAS[®]-NC with short supported hub and fitting dimensions of the type series 400 	451.____.5 Sizes 01 – 3	4 – 450	Simple symmetrical and narrow drive elements can be fitted without additional support bearing due to the integrated bearing. Low mass moment of inertia. Automatic re-engagement. Long working life. Page 26 with cone bushing Type 451._1_.5 Page 27 with keyway Type 451._2_.5
EAS[®]-NC torsionally rigid 	456.____.8 Sizes 4 – 6	75 – 2400	Torque limiting clutch for backlash-free torque transmission between two coaxial shafts. The torque is transmitted backlash-free until disengagement and reduces immediately when an overload occurs. High torsional stiffness. Long working life. Page 28 with cone bushing Type 456._1_.8 Page 29 with keyway Type 456._2_.8
EAS[®]-NC lastic 	457._2_.0 Sizes 01 – 3	4 – 450	Backlash-free torque limiting clutch combined with a torsionally flexible shaft coupling for connection two shafts. The flexible coupling section is designed as a simple slip-on coupling which allows an easy assembly and dismantling of the clutch. Long working life. Page 30 with keyway Type 457._2_.0
Mounting examples and Technical explanations			Page 31 – 35
Electrical accessories			Limit switch Page 36 – 38

Short hub with cone bushing

Type 450._1_.0

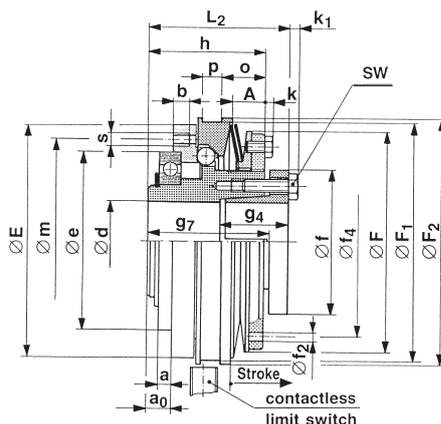

Sizes 03 – 3 Type 450._1_.0

Technical data

1) Size	Limiting torques for overload M_G 1)			Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Mass moments of inertia I		Weight kg	Clamping bolts and tightening torques for $\varnothing d$	
	Type 450.51_.0 Nm	Type 450.61_.0 Nm	Type 450.71_.0 Nm			Hub side kgm ²	Pressure flange side kgm ²		mm	Nm
03	0,65 – 1,3	1,3 – 2,6	2 – 3,8	4000	0,8	0,000027	0,000008	0,18	4xM3	1
02	2 – 5	5 – 10	6 – 15	4000	1,0	0,000054	0,000018	0,28	4xM3	1
01	4 – 10	8 – 20	12 – 30	4000	1,2	0,00019	0,00006	0,55	4xM4	3
0	8 – 20	15 – 40	23 – 60	4000	1,5	0,00047	0,00018	0,94	6xM4	3
1	15 – 36	30 – 72	45 – 108	3000	1,8	0,00120	0,00039	1,63	6xM5	5,5
2	30 – 75	60 – 150	90 – 225	2500	2,0	0,00273	0,00077	3,03	6xM6	9,5
3	60 – 150	120 – 300	180 – 450	2000	2,2	0,00620	0,00173	3,95	8xM6	9,5

Dimensions

Size	Bore d 2) from – to mm	Min. shaft length		A 6)	a 7)	a ₀	b	E	e _{h5} 8)	F
		g ₄ mm	g ₇ mm							
03	6 – 12	11,5	25,5	7,2	2	4,5	5	40	30	37
02	8 – 15	15,5	30,5	9,5	2	5	5	47	37	42
01	9 – 16	18	36	9,5	3	6	6	60	47	57
0	12 – 20	23	43	10,2	4	8	7	77	62	63
1	15 – 25	27	49	10,9	5	10	7,5	90	68	82
2	22 – 35	29	54	12,6	5	10	8,5	106	80	103
3	32 – 45	32	61	14,7	5	10	9,5	125	100	118,5

Size	F ₁	F ₂	f	f ₂	f ₄	h 6)	k	k ₁	L ₂ 3)	m	o 6)	p	s	SW
03	– 4)	45	26	–	–	24	– 5)	2	28,5	35	– 4)	– 4)	6 x M3	5,5
02	– 4)	50	30	3	37	29	– 5)	2	34,5	42	– 4)	– 4)	6 x M3	5,5
01	– 4)	65	35	5	46	33	1,0 5)	2,8	41	53	– 4)	– 4)	6 x M4	7
0	75	80	39	5	50	41	1,3 5)	2,8	49	69	14,9	7,5	6 x M5	7
1	90	95	48	6	67	47	3,0	3,5	56	80	17,4	7,5	6 x M6	8
2	105	110	61	6	84	52	5,5	4	62	90	19,7	8	6 x M6	10
3	125	130	74	7	104	59	5,5	4	70	112	23,5	9	6 x M8	10

1) other sizes for lower and higher torques on request

2) shaft fit: up to $\varnothing 38$ h₆, above $\varnothing 38$ h₈

3) dimensions in an un-tightened condition (in tightened condition shorter)

4) thrust washer without keyway, limit switch is located at the control element-front face

5) countersunk screw with hexagon socket DIN 7991

6) the dimensions A; h; o refer to the hub edge

7) mounting tolerance +0,1

8) fit by the user H7

We reserve the right to make dimensional and design alterations.

Order example:

To be included when ordering, please state:	Size	Type	Bore $\varnothing d$ H7	With limit switch
Order number:		450._1_.0		see pages 36–38

03 – 3 → according to size
 * medium torque range 5 → 0 ratchetting clutch
 * high torque range 6 → 5 synchronous clutch
 * max. torque range 7 →


* see technical data, limiting torque for overload M_G

Example: Order number 1 / 450.610.0 / 25 with limit switch 055.002.5

EAS[®]-NC ratchetting clutch/synchronous clutch

Short hub with keyway

Type 450..2..0

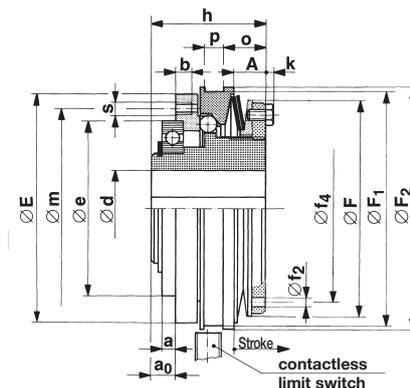

Sizes 03 – 3 Type 450..2..0

Technical data

1) Size	Limiting torques for overload M_G ¹⁾			Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Mass moments of inertia I		Weight kg
	Type 450.52..0 Nm	Type 450.62..0 Nm	Type 450.72..0 Nm			Hub side kgm ²	Pressure flange side kgm ²	
03	0,65 – 1,3	1,3 – 2,6	2 – 3,8	4000	0,8	0,000025	0,000008	0,17
02	2 – 5	5 – 10	6 – 15	4000	1,0	0,000051	0,000018	0,26
01	4 – 10	8 – 20	12 – 30	4000	1,2	0,00018	0,00006	0,51
0	8 – 20	15 – 40	23 – 60	4000	1,5	0,00046	0,00018	0,89
1	15 – 36	30 – 72	45 – 108	3000	1,8	0,00117	0,00039	1,62
2	30 – 75	60 – 150	90 – 225	2500	2,0	0,00265	0,00077	2,86
3	60 – 150	120 – 300	180 – 450	2000	2,2	0,00602	0,00173	3,72

Dimensions

Size	Bore		A ⁶⁾	a ⁷⁾	a ₀	b	E	e _{h5} ⁸⁾	F
	d _{min} mm	d _{max} mm							
03	6	11	7,2	2	4,5	5	40	30	37
02	8	16 ⁴⁾	9,5	2	5	5	47	37	42
01	9	20	9,5	3	6	6	60	47	57
0	12	20	10,2	4	8	7	77	62	63
1	15	25	10,9	5	10	7,5	90	68	82
2	22	35 ⁵⁾	12,6	5	10	8,5	106	80	103
3	32	45	14,7	5	10	9,5	125	100	118,5

Size	F ₁	F ₂	f ₂	f ₄	h ⁶⁾	k	m	o ⁶⁾	p	s
03	– ²⁾	45	–	–	24	– ³⁾	35	– ²⁾	– ²⁾	6 x M3
02	– ²⁾	50	3	37	29	– ³⁾	42	– ²⁾	– ²⁾	6 x M3
01	– ²⁾	65	5	46	33	1 ³⁾	53	– ²⁾	– ²⁾	6 x M4
0	75	80	5	50	41	1,3 ³⁾	69	14,9	7,5	6 x M5
1	90	95	6	67	47	3,0	80	17,4	7,5	6 x M6
2	105	110	6	84	52	5,5	90	19,7	8	6 x M6
3	125	130	7	104	59	5,5	112	23,5	9	6 x M8

- 1) other sizes for lower and higher torques on request
 2) thrust washer without keyway, limit switch is located at the control element-front facer
 3) countersunk screw with hexagon socket DIN 7991
 4) up to Ø 14 Nut keyway to DIN 6885/1, above Ø 14 keyway to DIN 6885/3
 5) up to Ø 33 keyway to DIN 6885/1, above Ø 33 keyway to DIN 6885/3
 6) the dimensions A; h; o refer to the hub edge
 7) mounting tolerance +0,1
 8) fit by the user H7
- We reserve the right to make dimensional and design alterations.
 9) Position of the keyway to the mounting bore "s" in the pressure flange not defined. A defined position is possible on request.

Order example:


To be included when ordering, please state:	Size	Type	Bore Ø d ^{H7}	With limit switch
Order number:		450..2..0	9)	see pages 36–38

- 03 – 3 →
 * medium torque range 5 →
 * high torque range 6 →
 * max. torque range 7 →
- according to size
 → 0 ratchetting clutch
 → 5 synchronous clutch
- * see technical data, limiting torque for overload M_G

Example: Order number 1 / 450.620.0 / 25 / 6885-1 with limit switch 055.002.5

Long projecting hub
with cone bushing

Type 450._1_.1

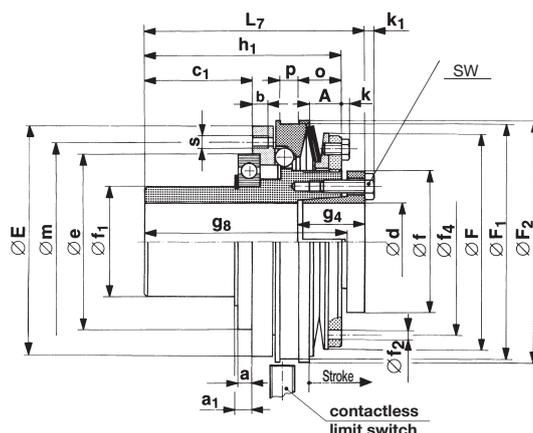

Sizes 03 – 3 Type 450._1_.1

Technical data

1) Size	Limiting torques for overload			Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Mass moments of inertia I		Weight kg	Clamping bolts and tightening torques for $\varnothing d$	
	Type 450.51_.1 Nm	Type 450.61_.1 Nm	Type 450.71_.1 Nm			Hub side kgm ²	Pressure flange side kgm ²		mm	Nm
03	0,65 – 1,3	1,3 – 2,6	2 – 3,8	4000	0,8	0,000028	0,000008	0,20	4xM3	1
02	2 – 5	5 – 10	6 – 15	4000	1,0	0,000058	0,000018	0,32	4xM3	1
01	4 – 10	8 – 20	12 – 30	4000	1,2	0,00019	0,00006	0,63	4xM4	3
0	8 – 20	15 – 40	23 – 60	4000	1,5	0,00050	0,00018	1,11	6xM4	3
1	15 – 36	30 – 72	45 – 108	3000	1,8	0,00126	0,00039	1,78	6xM5	5,5
2	30 – 75	60 – 150	90 – 225	2500	2,0	0,00287	0,00077	3,45	6xM6	9,5
3	60 – 150	120 – 300	180 – 450	2000	2,2	0,00676	0,00173	5,03	8xM6	9,5

Dimensions

Size	Bore $d^{2)}$ from – to mm	Min. shaft length		A ⁶⁾	a ⁷⁾	a ₁	b	c ₁	E	e _{h5} ⁸⁾	F
		g ₄ mm	g ₈ mm								
03	6 – 12	11,5	41,5	7,2	2	3,0	5	20,5	40	30	37
02	8 – 15	15,5	50,5	9,5	2	3,2	5	25	47	37	42
01	9 – 16	18	61	9,5	3	4,2	6	31	60	47	57
0	12 – 20	23	70	10,2	4	5,5	7	35	77	62	63
1	15 – 25	27	79	10,9	5	6,75	7,5	40	90	68	82
2	22 – 35	29	92	12,6	5	7,0	8,5	48	106	80	103
3	32 – 45	32	111	14,7	5	7,5	9,5	60	125	100	118,5

Size	F ₁	F ₂	f	f _{1h6}	f ₂	f ₄	h ₁ ⁶⁾	k	k ₁	L ₇ ³⁾	m	o ⁶⁾	p	s	SW
03	– ⁴⁾	45	26	17	–	–	40	– ⁵⁾	2	44,5	35	– ⁴⁾	– ⁴⁾	6 x M3	5,5
02	– ⁴⁾	50	30	25	3	37	49	– ⁵⁾	2	54,5	42	– ⁴⁾	– ⁴⁾	6 x M3	5,5
01	– ⁴⁾	65	35	30	5	46	58	1 ⁵⁾	2,8	66	53	– ⁴⁾	– ⁴⁾	6 x M4	7
0	75	80	39	35	5	50	68	1,3 ⁵⁾	2,8	76	69	14,9	7,5	6 x M5	7
1	90	95	48	40	6	67	77	3,0	3,5	86	80	17,4	7,5	6 x M6	8
2	105	110	61	50	6	84	90	5,5	4	100	90	19,7	8	6 x M6	10

- 1) other sizes for lower and higher torques on request
- 2) shaft fit: up to $\varnothing 38$ h₆, above $\varnothing 38$ h₈
- 3) dimensions in an un-tightened condition (in tightened condition shorter)
- 4) thrust washer without keyway, limit switch is located at the control element-front face
- 5) countersunk screw with hexagon socket DIN 7991
- 6) the dimensions A; h₁; o refer to the hub edge
- 7) mounting tolerance +0,1
- 8) fit by the user H7

We reserve the right to make dimensional and design alterations.

Order example:

To be included when ordering, please state:	Size	Type	Bore $\varnothing d$ H7	With limit switch
Order number:		450._1_.1		see pages 36–38

- 03 – 3 →
- * medium torque range 5 →
- * high torque range 6 →
- * max. torque range 7 →
- according to size
- 0 ratchetting clutch
- 5 synchronous clutch


* see technical data, limiting torque for overload M_G

Example: Order number 2 / 450.510.1 / 30 with limit switch 055.002.5

EAS[®]-NC ratchetting clutch/synchronous clutch

Long projecting hub
keyway

Type 450._2_.1 with

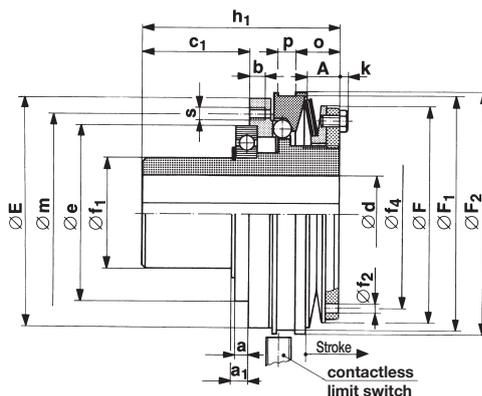

Sizes 03 – 3 Type 450._2_.1

Technical data

1) Size	Limiting torques for overload M_G 1)			Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Mass moments of inertia I		Weight kg
	Type 450.52_.1 Nm	Type 450.62_.1 Nm	Type 450.72_.1 Nm			Hub side kgm^2	Pressure flange side kgm^2	
03	0,65 – 1,3	1,3 – 2,6	2 – 3,8	4000	0,8	0,000026	0,000008	0,19
02	2 – 5	5 – 10	6 – 15	4000	1,0	0,000055	0,000018	0,30
01	4 – 10	8 – 20	12 – 30	4000	1,2	0,00019	0,00006	0,59
0	8 – 20	15 – 40	23 – 60	4000	1,5	0,00049	0,00018	1,06
1	15 – 36	30 – 72	45 – 108	3000	1,8	0,00123	0,00039	1,77
2	30 – 75	60 – 150	90 – 225	2500	2,0	0,00279	0,00077	3,28
3	60 – 150	120 – 300	180 – 450	2000	2,2	0,00658	0,00173	4,80

Dimensions

Size	Bore		A 6)	a 7)	a ₁	b	c ₁	E	e _{h5} 8)	F
	d _{min} mm	d _{max} mm								
03	6	11	7,2	2	3,0	5	20,5	40	30	37
02	8	16 4)	9,5	2	3,2	5	25	47	37	42
01	9	20	9,5	3	4,2	6	31	60	47	57
0	12	20	10,2	4	5,5	7	35	77	62	63
1	15	25	10,9	5	6,75	7,5	40	90	68	82
2	22	35 5)	12,6	5	7,0	8,5	48	106	80	103
3	32	45	14,7	5	7,5	9,5	60	125	100	118,5

Size	F ₁	F ₂	f ₁ h6	f ₂	f ₄	h ₁ 6)	k	m	o 6)	p	s
03	– 2)	45	17	–	–	40	– 3)	35	– 2)	– 2)	6 x M3
02	– 2)	50	25	3	37	49	– 3)	42	– 2)	– 2)	6 x M3
01	– 2)	65	30	5	46	58	1 3)	53	– 2)	– 2)	6 x M4
0	75	80	35	5	50	68	1,3 3)	69	14,9	7,5	6 x M5
1	90	95	40	6	67	77	3,0	80	17,4	7,5	6 x M6
2	105	110	50	6	84	90	5,5	90	19,7	8	6 x M6
3	125	130	65	7	104	109	5,5	112	23,5	9	6 x M8

- 1) other sizes for lower and higher torques on request
- 2) thrust washer without keyway, limit switch is located at the control element-front face
- 3) countersunk screw with hexagon socket DIN 7991
- 4) up to Ø 14 keyway to DIN 6885/1, above Ø 14 keyway to DIN 6885/3
- 5) up to Ø 33 keyway to DIN 6885/1, above Ø 33 keyway to DIN 6885/3
- 6) the dimensions A; h₁; o refer to the hub edge
- 7) mounting tolerance +0,1
- 8) fit by the user H7

We reserve the right to make dimensional and design alterations.

- 9) Position of the keyway to the mounting bore "s" in the pressure flange not defined. A defined position is possible on request.

Order example:

To be included when ordering, please state:	Size	Type	Bore Ø d ^{H7}	With limit switch
Order number:		450._2_.1	9)	see pages 36–38


- 03 – 3 →
 * medium torque range 5 →
 * high torque range 6 →
 * max. torque range 7 →
- according to size
 → 0 ratchetting clutch
 → 5 synchronous clutch

* see technical data, limiting torque for overload M_G

Example: Order number 2 / 450.520.1 / 30 / 6885-1 with limit switch 055.002.5

Two-bearings design with cone bushing

Type 450._1_.2

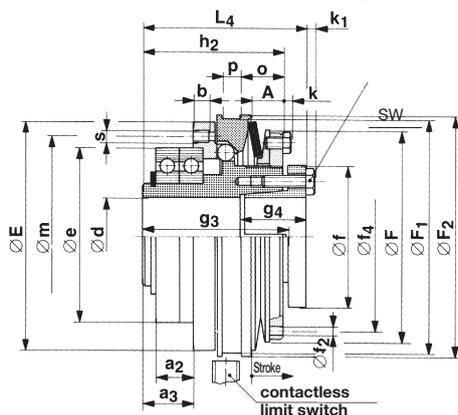

Sizes 03 – 3 Type 450._1_.2

Technical data

1) Size	Limiting torques for overload M_G 1)			Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Mass moments of inertia I		Weight kg	Clamping bolts and tightening torques for $\varnothing d$	
	Type 450.51_.2 Nm	Type 450.61_.2 Nm	Type 450.71_.2 Nm			Hub side kgm ²	Pressure flange side kgm ²		mm	Nm
03	0,65 – 1,3	1,3 – 2,6	2 – 3,8	4000	0,8	0,000028	0,000008	0,13	4xM3	1
02	2 – 5	5 – 10	6 – 15	4000	1,0	0,000058	0,000018	0,31	4xM3	1
01	4 – 10	8 – 20	12 – 30	4000	1,2	0,000197	0,00006	0,60	4xM4	3
0	8 – 20	15 – 40	23 – 60	4000	1,5	0,000496	0,00018	1,03	6xM4	3
1	15 – 36	30 – 72	45 – 108	3000	1,8	0,00124	0,00039	1,74	6xM5	5,5
2	30 – 75	60 – 150	90 – 225	2500	2,0	0,00282	0,00077	3,20	6xM6	9,5
3	60 – 150	120 – 300	180 – 450	2000	2,2	0,00697	0,00173	4,24	8xM6	9,5

Dimensions

Size	Bore d 2) from – to mm	Min. shaft length		A 6)	a_2 7)	a_3	b	E	e_{h5} 8)	F
		g_3 mm	g_4 mm							
03	6 – 12	32,5	11,5	7,2	9	11,5	5	40	30	37
02	8 – 15	37,5	15,5	9,5	9	12	5	47	37	42
01	9 – 16	45	18	9,5	12	15	6	60	47	57
0	12 – 20	52	23	10,2	13	17	7	77	62	63
1	15 – 25	58	27	10,9	14	19	7,5	90	68	82
2	22 – 35	64	29	12,6	15	20	8,5	106	80	103
3	32 – 45	72	32	14,7	16	21	9,5	125	100	118,5

Size	F_1	F_2	f	f_2	f_4	h_2 6)	k	k_1	L_4 3)	m	o 6)	p	s	SW
03	– 4)	45	26	–	–	31	– 5)	2	35,5	35	– 4)	– 4)	6 x M3	5,5
02	– 4)	50	30	3	37	36	– 5)	2	41,5	42	– 4)	– 4)	6 x M3	5,5
01	– 4)	65	35	5	46	42	1,0 5)	2,8	50	53	– 4)	– 4)	6 x M4	7
0	75	80	39	5	50	50	1,3 5)	2,8	58	69	14,9	7,5	6 x M5	7
1	90	95	48	6	67	56	3,0	3,5	65	80	17,4	7,5	6 x M6	8
2	105	110	61	6	84	62	5,5	4	72	90	19,7	8	6 x M6	10
3	125	130	74	7	104	70	5,5	4	81	112	23,5	9	6 x M8	10

- 1) other sizes for lower and higher torques on request
- 2) shaft fit: up to $\varnothing 38 h_6$, above $\varnothing 38 h_8$
- 3) dimensions in an un-tightened condition (in tightened condition shorter)
- 4) thrust washer without keyway, limit switch is located at the control element-front face
- 5) countersunk screw with hexagon socket DIN 7991
- 6) the dimensions A; h_2 ; o refer to the hub edge
- 7) mounting tolerance +0,1
- 8) fit by the user H7

We reserve the right to make dimensional and design alterations.

Order example:

To be included when ordering, please state:	Size	Type	Bore $\varnothing d$ H7	With limit switch
Order number:		450._1_.2		see pages 36–38

- 03 – 3 →
- * medium torque range. 5 →
- * high torque range. 6 →
- * max. torque range. 7 →
- according to size
- 0 ratchetting clutch
- 5 synchronous clutch


* see technical data, limiting torque for overload M_G

Example: Order number 1 / 450.610.2 / 25 with limit switch 055.002.5

EAS[®]-NC ratchetting clutch/synchronous clutch

Two-bearings design
with keyway

Type 450.2.2

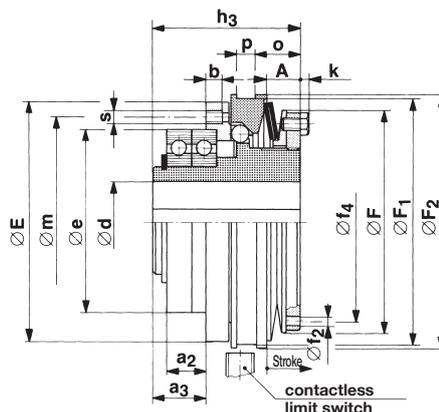

Sizes 03 – 3 Type 450.2.2

Technical data

1) Size	Limiting torques for overload M_G 1)			Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Mass moments of inertia I		Weight kg
	Type 450.52.2 Nm	Type 450.62.2 Nm	Type 450.72.2 Nm			Hub side kgm ²	Pressure flange side kgm ²	
03	0,65 – 1,3	1,3 – 2,6	2 – 3,8	4000	0,8	0,000026	0,000008	0,18
02	2 – 5	5 – 10	6 – 15	4000	1,0	0,000055	0,000018	0,29
01	4 – 10	8 – 20	12 – 30	4000	1,2	0,000197	0,00006	0,56
0	8 – 20	15 – 40	23 – 60	4000	1,5	0,000496	0,00018	0,98
1	15 – 36	30 – 72	45 – 108	3000	1,8	0,00124	0,00039	1,73
2	30 – 75	60 – 150	90 – 225	2500	2,0	0,00282	0,00077	3,03
3	60 – 150	120 – 300	180 – 450	2000	2,2	0,00697	0,00173	4,01

Dimensions

Size	Bore		A 6)	a_2 7)	a_3	b	E	e_{h5} 8)	F
	d_{min} mm	d_{max} mm							
03	6	11	7,2	9	11,5	5	40	30	37
02	8	16 4)	9,5	9	12	5	47	37	42
01	9	20	9,5	12	15	6	60	47	57
0	12	20	10,2	13	17	7	77	62	63
1	15	25	10,9	14	19	7,5	90	68	82
2	22	35 5)	12,6	15	20	8,5	106	80	103
3	32	45	14,7	16	21	9,5	125	100	118,5

Size	F_1	F_2	f_2	f_4	h_3 6)	k	m	o 6)	p	s
03	– 2)	45	–	–	31	– 3)	35	– 2)	– 2)	6 x M3
02	– 2)	50	3	37	36	– 3)	42	– 2)	– 2)	6 x M3
01	– 2)	65	5	46	42	1 3)	53	– 2)	– 2)	6 x M4
0	75	80	5	50	50	1,3 3)	69	14,9	7,5	6 x M5
1	90	95	6	67	56	3,0	80	17,4	7,5	6 x M6
2	105	110	6	84	62	5,5	90	19,7	8	6 x M6
3	125	130	7	104	70	5,5	112	23,5	9	6 x M8

- 1) other sizes for lower and higher torques on request
- 2) thrust washer without keyway, limit switch is located at the control element-front face
- 3) countersunk screw with hexagon socket DIN 7991
- 4) up to $\varnothing 14$ keyway to DIN 6885/1, above $\varnothing 14$ keyway to DIN 6885/3
- 5) up to $\varnothing 33$ keyway to DIN 6885/1, above $\varnothing 33$ keyway to DIN 6885/3
- 6) the dimensions A; h_3 ; o refer to the hub edge
- 7) mounting tolerance +0,1
- 8) fit by the user H7

We reserve the right to make dimensional and design alterations.

- 9) Position of the keyway to the mounting bore "s" in the pressure flange not defined. A defined position is possible on request.

Order example:


To be included when ordering, please state:	Size	Type	Bore $\varnothing d^{H7}$	With limit switch
Order number:		450.2.2	9)	see pages 36–38

- 03 – 3 → according to size
 * medium torque range..... 5 → 0 ratchetting clutch
 * high torque range..... 6 → 5 synchronous clutch
 * max. torque range..... 7 →
- * see technical data, limiting torque for overload M_G

Example: Order number 1 / 450.620.2 / 25 / 6885–1 with limit switch 055.002.5

Steel bellows
with cone bushing

Type 453._1_.0

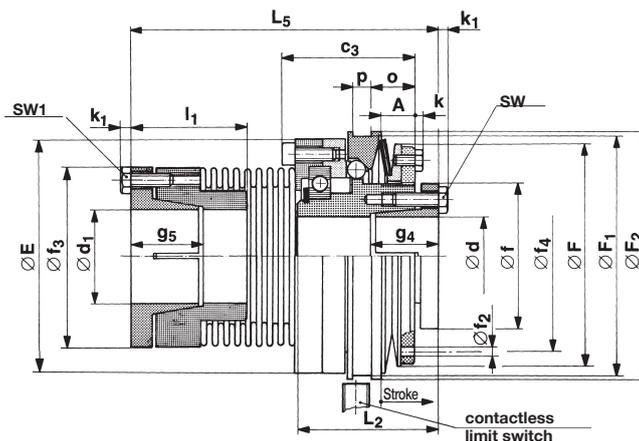

Sizes 03 – 3 Type 453._1_.0

Technical data

1) Size	Limiting torques for overload M_G ¹⁾			Nominal torque of flexible, torsionally rigid steel bellows coupling T_{KN}	Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Permissible flexibility		
	Type 453.51_.0 Nm	Type 453.61_.0 Nm	Type 453.71_.0 Nm				axial ΔK_a mm	angular ΔK_w °	radial ΔK_r mm
03	0,65 – 1,3	1,3 – 2,6	2 – 3,8	12	4000	0,8	0,2	2	0,1
02	2 – 5	5 – 10	6 – 15	25	4000	1,0	0,3	2	0,1
01	4 – 10	8 – 20	12 – 30	50	4000	1,2	0,4	2	0,15
0	8 – 20	15 – 40	23 – 60	100	4000	1,5	0,5	2	0,15
1	15 – 36	30 – 72	45 – 108	200	3000	1,8	0,8	2	0,2
2	30 – 75	60 – 150	90 – 225	350	2500	2,0	1,0	2	0,25
3	60 – 150	120 – 300	180 – 450	600	2000	2,2	1,2	2	0,3

Size	Mass moments of inertia I		Weight kg	Clamping bolts and tightening torques				Bore ²⁾		Min. shaft length	
	Hub side kgm ²	Flexible side kgm ²		at $\varnothing d$		at $\varnothing d_1$		d from-to mm	d ₁ from-to mm	g ₄ mm	g ₅ mm
03	0,000027	0,000026	0,29	4 x M3	1,3	4 x M3	1,3	6 – 12	6 – 12	11,5	12,5
02	0,000054	0,000059	0,47	4 x M3	1,3	4 x M3	1,3	8 – 15	8 – 15	15,5	16
01	0,00019	0,00020	0,97	4 x M4	3	4 x M4	3	9 – 16	9 – 20	18	23,5
0	0,00047	0,00061	1,68	6 x M4	3	6 x M5	5,5	12 – 20	12 – 25	23	27
1	0,00120	0,00133	2,73	6 x M5	5,5	6 x M6	9,5	15 – 25	15 – 35	27	29
2	0,00273	0,00274	4,75	6 x M6	9,5	6 x M8	17	22 – 35	22 – 42	29	32
3	0,00620	0,00616	6,55	8 x M6	9,5	8 x M8	15	32 – 45	32 – 50	32	35

Dimensions

Size	A ⁶⁾	c ₃ ⁶⁾	E	F	F ₁	F ₂	f	f ₂	f ₃	f ₄	k	k ₁	L ₂ ³⁾	L ₅ ³⁾	l ₁ ³⁾	o ⁶⁾	p	SW	SW ₁
03	7,2	28	40	37	– ⁵⁾	45	26	–	30	–	– ⁵⁾	2	28,5	58,5	14	– ⁴⁾	– ⁴⁾	5,5	5,5
02	9,5	33,5	47	42	– ⁵⁾	50	30	3	36	37	– ⁵⁾	2	34,5	70,5	21	– ⁴⁾	– ⁴⁾	5,5	5,5
01	9,5	36,5	60	57	– ⁵⁾	65	35	5	47	46	1,0 ⁵⁾	2,8	41	85	27	– ⁴⁾	– ⁴⁾	7	7
0	10,2	48	77	63	75	80	39	5	58	50	1,3 ⁵⁾	2,8	49	98	36	14,9	7,5	7	8
1	10,9	54	90	82	90	95	48	6	70	67	3,0	3,5	56	115	39	17,4	7,5	8	10
2	12,6	60	106	103	105	110	61	6	80	84	5,5	4	62	134	47	19,7	8	10	13
3	14,7	69	125	118,5	125	130	74	7	97	104	5,5	4	70	152	56	23,5	9	10	13

1) other sizes for lower and higher torques on request

We reserve the right to make dimensional and design alterations.

2) shaft fit: up to $\varnothing 38 h_8$, above $\varnothing 38 h_8$

3) dimensions in an un-tightened condition (in tightened condition shorter)

5) countersunk screw with hexagon socket DIN 7991

4) thrust washer without keyway, limit switch is located at the control element-front face

6) the dimensions A; h; o refer to the hub edge

Order example:

To be included when ordering, please state:	Size	Type	Bore $\varnothing d$ ^{H7}	Bore $\varnothing d_1$ ^{H7}	With limit switch
Order number:		453._1_.0			see pages 36–38

03 – 3 →
 * medium torque range 5 →
 * high torque range 6 →
 * max. torque range 7 →
 according to size
 according to size
 0 ratchetting clutch
 5 synchronous clutch


* see technical data, limiting torque for overload M_G

Example: Order number 2 / 453.615.0 /22/ 25 with limit switch 055.002.5

EAS[®]-NC ratchetting clutch/synchronous clutch

Steel bellows with keyway

Type 453._2_.0

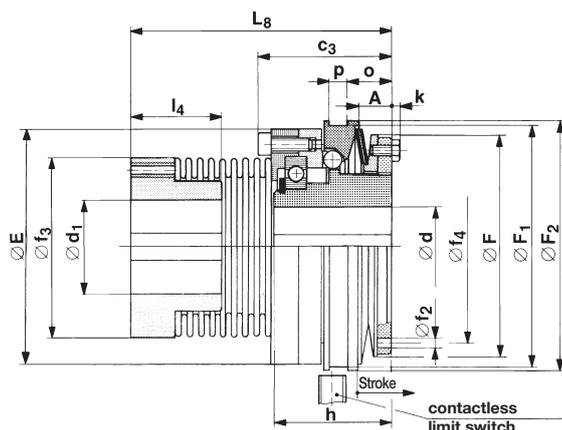

Sizes 03 – 3 Type 453._2_.0

Technical data

1) Size	Limiting torques for overload M_G 1)			Nominal torque of flexible, torsionally rigid steel coupling T_{KN}	Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Permissible flexibility		
	Type 453.52_.0 Nm	Type 453.62_.0 Nm	Type 453.72_.0 Nm				axial ΔK_a mm	angular ΔK_w °	radial ΔK_r mm
03	0,65 – 1,3	1,3 – 2,6	2 – 3,8	12	4000	0,8	0,2	2	0,1
02	2 – 5	5 – 10	6 – 15	25	4000	1,0	0,3	2	0,1
01	4 – 10	8 – 20	12 – 30	50	4000	1,2	0,4	2	0,15
0	8 – 20	15 – 40	23 – 60	100	4000	1,5	0,5	2	0,15
1	15 – 36	30 – 72	45 – 108	200	3000	1,8	0,8	2	0,2
2	30 – 75	60 – 150	90 – 225	350	2500	2,0	1,0	2	0,25
3	60 – 150	120 – 300	180 – 450	600	2000	2,2	1,2	2	0,3

Size	Mass moments of inertia I		Weight kg	Bore			
	Hub side kgm ²	Flexible side kgm ²		d_{min} mm	d_{max} mm	$d_{1 min}$ mm	$d_{1 max}$ mm
03	0,000025	0,000026	0,29	6	11	6	11
02	0,000051	0,000059	0,47	8	16 ⁴⁾	8	16 ⁴⁾
01	0,00018	0,00020	0,97	9	20	9	20 ⁶⁾
0	0,00046	0,00061	1,68	12	20	12	25 ⁷⁾
1	0,00117	0,00133	2,73	15	25	15	35 ⁵⁾
2	0,00265	0,00274	4,75	22	35 ⁵⁾	22	42 ⁸⁾
3	0,00602	0,00616	6,55	32	45	32	50

Dimensions

Size	A ⁹⁾	c_3 ⁹⁾	E	F	F_1	F_2	f_2	f_3	f_4	h	k	L_8 ⁹⁾	l_4	o ⁹⁾	p
03	7,2	28	40	37	– ²⁾	45	–	30	–	24	– ³⁾	49,3	9,5	– ²⁾	– ²⁾
02	9,5	33,5	47	42	– ²⁾	50	3	36	37	29	– ³⁾	59	15	– ²⁾	– ²⁾
01	9,5	36,5	60	57	– ²⁾	65	5	47	46	33	1,0 ³⁾	69	25	– ²⁾	– ²⁾
0	10,2	48	77	63	75	80	5	58	50	41	1,3 ³⁾	81	27	14,9	7,5
1	10,9	54	90	82	90	95	6	70	67	47	3,0	96	29	17,4	7,5
2	12,6	60	106	103	105	110	6	80	84	52	5,5	113	36	19,7	8
3	14,7	69	125	118,5	125	130	7	97	104	59	5,5	129	44	23,5	9

- 1) other sizes for lower and higher torques on request
 2) thrust washer without keyway, limit switch is located at the control element-front face
 3) countersunk screw with hexagon socket DIN 7991

- 4) up to \varnothing 14 keyway to DIN 6885/1, above \varnothing 14 keyway to DIN 6885/3
 5) up to \varnothing 33 keyway to DIN 6885/1, above \varnothing 33 keyway to DIN 6885/3
 6) up to \varnothing 18 keyway to DIN 6885/1, above \varnothing 18 keyway to DIN 6885/3
 7) up to \varnothing 22 keyway to DIN 6885/1, above \varnothing 22 keyway to DIN 6885/3
 8) up to \varnothing 38 keyway to DIN 6885/1, above \varnothing 38 keyway to DIN 6885/3
 9) the dimensions A; c_3 ; L_8 ; o refer to the hub edge

We reserve the right to make dimensional and design alterations.

Order example:


To be included when ordering, please state:	Size	Type	Bore $\varnothing d$ H7	Bore $\varnothing d_1$ H7	With limit switch
Order number:		453._2_.0			see pages 36–38

- 03 – 3 →
 * medium torque range 5 →
 * high torque range 6 →
 * max. torque range 7 →
 * see technical data, limiting torque for overload M_G
 according to size
 according to size
 0 ratchetting clutch
 5 synchronous clutch

Example: Order number 3 / 453.525.0 / 30 / 6885-1 / 40 / 6885-1 with limit switch 055.002.5

EAS[®]-NC with steel bellows
NC-side cone bushing
bellows side clamping hub

Type 453._3_.0

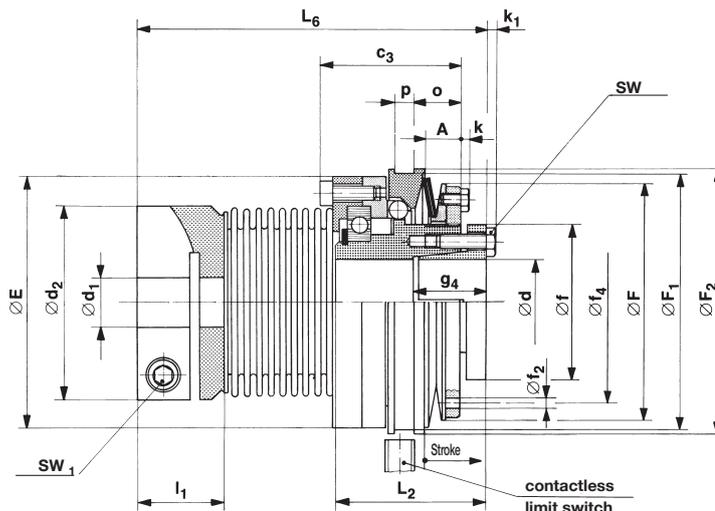

Sizes 0 – 3 Type 453._3_.0

Technical data

1) Size	Limiting torques for overload M_G 1)			Nominal torque of flexible, torsionally rigid steel bellows coupling T_{KN}	Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Permissible flexibility		
	Type 453.53_0 Nm	Type 453.63_0 Nm	Type 453.73_0 Nm				axial ΔK_a mm	angular ΔK_w °	radial ΔK_r mm
0	8 – 20	15 – 40	23 – 60	100	4000	1,5	0,5	2	0,15
1	15 – 36	30 – 72	45 – 108	200	3000	1,8	0,8	2	0,2
2	30 – 75	60 – 150	90 – 225	350	2500	2,0	1,0	2	0,25
3	60 – 150	120 – 300	180 – 450	600	2000	2,2	1,2	2	0,3

Size	Mass moments of inertia I		Weight kg	Clamping bolts and tightening torques				Bore		Min. shaft length	
	Hub side kgm^2	Flexible side kgm^2		SW		SW ₁		d ²⁾ from-to mm	d ₁ from-to mm	g ₄ mm	l ₁ mm
0	0,00047	0,00061	1,68	6 x M4	3	M6	18	12 – 20	15 – 32	23	28
1	0,00120	0,00133	2,73	6 x M5	5,5	M6	18	15 – 25	25 – 42	27	28
2	0,00273	0,00274	4,75	6 x M6	9,5	M8	43	22 – 35	30 – 45	29	36
3	0,00620	0,00616	6,55	8 x M6	9,5	M10	87	32 – 45	35 – 55	32	40

Dimensions

Size	A ⁶⁾	c ₃ ⁶⁾	d ₂	E	F	F ₁	F ₂	f	f ₂	f ₄	k	k ₁	L ₂ ³⁾	L ₆ ³⁾	l ₁	o ⁶⁾	p	SW	SW ₁
0	10,2	48	60	77	63	75	80	39	5	50	1,3 ⁵⁾	2,8	49	108	28	14,9	7,5	7	5
1	10,9	54	71	90	82	90	95	48	6	67	3,0	3,5	56	122,5	28	17,4	7,5	8	5
2	12,6	60	82	106	103	105	110	61	6	84	5,5	4	62	146	36	19,7	8	10	6
3	14,7	69	98	125	118,5	125	130	74	7	104	5,5	4	70	165,5	40	23,5	9	10	8

- 1) other sizes for lower and higher torques on request
- 2) shaft fit: up to $\varnothing 38 h_8$, above $\varnothing 38 h_8$
- 3) dimensions in an un-tightened condition (in tightened condition shorter)
- 5) countersunk screw with hexagon socket DIN 7991
- 6) the dimensions A; c₃; o refer to the hub edge

We reserve the right to make dimensional and design alterations.

Order example:

To be included when ordering, please state:	Size	Type	Bore $\varnothing d^{H7}$	Bore $\varnothing d_1^{H7}$	With limit switch
Order number:		453._3_.0			see pages 36–38

- 0 – 3 →
- * medium torque range. 5 →
- * high torque range. 6 →
- * max. torque range 7 →
- according to size
- according to size
- 0 ratchetting clutch
- 5 synchronous clutch


* see technical data, limiting torque for overload M_G

Example: Order number 2 / 453.635.0 / 22/ 30 with limit switch 055.002.5

EAS[®]-NC ratchetting clutch/synchronous clutch

EAS[®]-NC with flexible backlash-free shaft coupling
NC-side cone bushing
bellows side clamping hub

Type 454.0_._

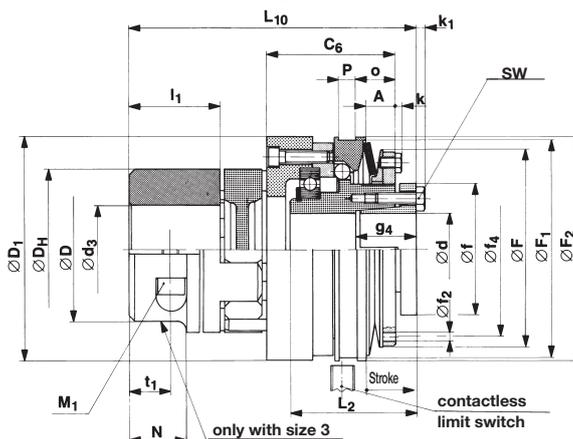

Sizes 01 – 3 Type 454.0_._

Technical data

Size	Limiting torque for overload M_G		Nominal torque flexible, backlash-free shaft coupling T_{KN} 1)						Max. speed n_{max} rpm	Stroke of thrust washer in the event of an overload mm	Tightening torques clamping bolts T_A at the diameter:		Weight kg
	Type 454.50_._ Nm	Type 454.60_._ Nm	92 Shore A		98 Shore A		64 Shore D				$\varnothing d$ Nm	$\varnothing d_3$ Nm	
01	4 – 10	8 – 20	10	20	17	34	21	42	4000	1,2	3	10,5	0,95
0	8 – 20	15 – 40	35	70	60	120	75	150	4000	1,5	3	10,5	1,60
1	15 – 36	30 – 72	95	190	160	320	200	400	3000	1,8	5,5	25,0	2,70
2	30 – 75	60 – 150	190	380	325	650	405	810	2500	2,0	9,5	25,0	4,90
3	60 – 150	120 – 300	265	530	450	900	560	1120	2000	2,2	9,5	25,0	7,10

Size	Shaft misalignments flexible coupling							Mass moments of inertia I		Bores		Min. shaft length g_4 mm
	axial	radial			angular misalignments			Hub side kgm^2	Flexible side kgm^2	Flexible side $\varnothing d_3$ 1) mm	EAS [®] -NC-side $\varnothing d$ 2) mm	
	92/98 Shore A ΔK_a mm	92 Shore A ΔK_r mm	98 Shore A ΔK_r mm	64 Shore D ΔK_r mm	92 Shore A α °	98 Shore A α °	64 Shore D α °					
01	1,2	0,10	0,06	0,04	1,0	0,9	0,8	0,00018	0,0001	10 – 20	9 – 16	18
0	1,4	0,14	0,10	0,07	1,0	0,9	0,8	0,00046	0,0004	15 – 28	12 – 20	23
1	1,5	0,15	0,11	0,08	1,0	0,9	0,8	0,00117	0,0010	19 – 35	15 – 25	27
2	1,8	0,17	0,12	0,09	1,0	0,9	0,8	0,00265	0,0020	20 – 45	22 – 35	29
3	2,0	0,19	0,14	0,1	1,0	0,9	0,8	0,00602	0,0050	28 – 45	32 – 45	32

1) The transmittable torques of the flexible coupling "TKN" depend on factors, as for example with temperatures, torsional stiffness etc. Please also see clutch design ROBA[®]-ES cat. K.940. or contact our company.
Furthermore, the transmittable torques of the flexible coupling depend on the bore diameter d_3 , please also see Table 1 on page 32
2) shaft fit: up to $\varnothing 38 h_8$, above $\varnothing 38 h_9$

Dimensions

Size	A 4)	C ₆	D	D ₁	D _H	F	F ₁	F ₂	f	f ₂	f ₄	k	k ₁	I ₁	L ₂ 6)	L ₁₀ 6)	M ₁	N	o 4)	p	t ₁	SW
01	9,5	38	–	65	40	57	–	65	35	5	46	1,0 5)	2,8	25	41	89	M6	–	– 7)	– 7)	12	7
0	10,2	47	–	80	55	63	75	80	39	5	50	1,3	2,8	30	49	103	M6	–	14,9	7,5	14	7
1	10,9	55	–	95	65	82	90	95	48	6	67	3,0	3,5	35	56	119	M8	–	17,4	7,5	13,5	8
2	12,6	61	–	106	80	103	105	110	61	6	84	5,5	4	45	62	140	M8	–	19,7	8	20	10
3	14,7	69	75	130	95	118,5	125	130	74	7	104	5,5	4	50	70	156	M8	28	23,5	9	20	10

4) the dimensions A; C₆; o refer to the hub edge
5) countersunk screw with hexagon socket DIN 7991
6) dimensions in an un-tightened condition (in tightened condition shorter)
7) thrust washer without keyway, limit switch is located at the control element-front face

We reserve the right to make dimensional and design alterations.

Order example:


To be included when ordering, please state:	Size	Type	Bore $\varnothing d$ H7	Bore $\varnothing d_3$ F7	With limit switch
Order number:		454.0_._			see pages 36–38

- 01 – 3 →
- * medium torque range..... 5 →
- * high torque range..... 6 →
- * see technical data, limiting torque for overload M_G
- according to size
- according to size
- 3 flexible coupling 92 Shore A
- 4 flexible coupling 98 Shore A
- 6 flexible coupling 64 Shore D
- 0 ratchetting clutch
- 5 synchronous clutch

Example: Order number 2 / 454.605.3 / 22 / 25 with limit switch 055.002.5

EAS[®]-NC with flexible backlash-free shaft coupling
NC-side cone bushing
lastic-side shrink disc

Type 454._1._

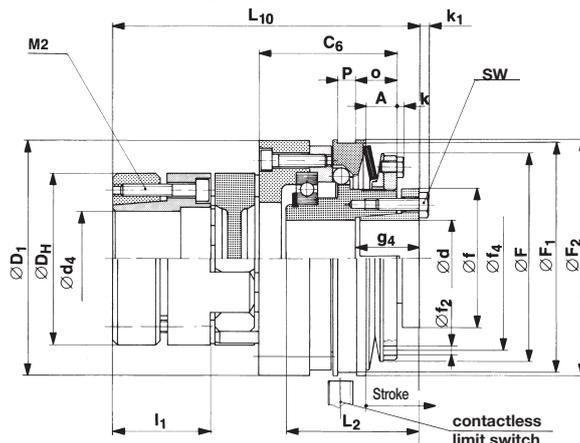

Sizes 01 – 3 Type 454._1._

Technical data

Size	Limiting torque for overload M_G			Nominal torque flexible backlash-free shaft coupling T_{KN} ¹⁾						Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Tightening torques clamping bolts T_A at the diameter:		Weight kg
	Type	Type	Type	92 Shore A		98 Shore A		64 Shore D				$\varnothing d$ Nm	$\varnothing d_4$ Nm	
	454.51._	454.61._	454.71._	T_{KN} Nm	$T_{KN max}$ Nm	T_{KN} Nm	$T_{KN max}$ Nm	T_{KN} Nm	$T_{KN max}$ Nm					
01	4 – 10	8 – 20	–	10	20	17	34	21	42	4000	1,2	3	3,0	0,95
0	8 – 20	15 – 40	23 – 60	35	70	60	120	75	150	4000	1,5	3	6,0	1,60
1	15 – 36	30 – 72	45 – 108	95	190	160	320	200	400	3000	1,8	5,5	6,0	2,70
2	30 – 75	60 – 150	90 – 225	190	380	325	650	405	810	2500	2,0	9,5	10,5	4,90
3	60 – 150	120 – 300	180 – 450	265	530	450	900	560	1120	2000	2,2	9,5	35,0	7,10

Size	Shaft misalignments flexible coupling							Mass moments of inertia I		Bores		Min. shaft length g_4 mm
	axial	radial			angular misalignments			Hub side kgm ²	Flexible side kgm ²	Flexible side $\varnothing d_4$ mm	EAS [®] -NC side $\varnothing d$ ²⁾ mm	
	92/98 Shore A 64 Shore D ΔK_a mm	92 Shore A ΔK_r mm	98 Shore A ΔK_r mm	64 Shore D ΔK_r mm	92 Shore A α °	98 Shore A α °	64 Shore D α °					
01	1,2	0,10	0,06	0,04	1,0	0,9	0,8	0,00018	0,0001	10 – 20	9 – 16	18
0	1,4	0,14	0,10	0,07	1,0	0,9	0,8	0,00046	0,0004	15 – 25	12 – 20	23
1	1,5	0,15	0,11	0,08	1,0	0,9	0,8	0,00117	0,0010	19 – 35	15 – 25	27
2	1,8	0,17	0,12	0,09	1,0	0,9	0,8	0,00265	0,0020	20 – 40	22 – 35	29
3	2,0	0,19	0,14	0,1	1,0	0,9	0,8	0,00602	0,0050	28 – 42	32 – 45	32

- 1) The transmittable torques of the flexible coupling "T_{KN}" depend on factors, as for example with temperatures, torsional stiffness etc. Please also see clutch design ROBA[®]-ES cat. K.940. or contact our company.
2) shaft fit: up to $\varnothing 38 h_8$, above $\varnothing 38 h_7$

Dimensions

Size	A ⁴⁾	C ₆	D ₁	D _H	F	F ₁	F ₂	f	f ₂	f ₄	k	k ₁	l ₁	L ₂ ⁶⁾	L ₁₀ ⁶⁾	M ₂	o ⁴⁾	p	SW
01	9,5	38	65	40	57	–	65	35	5	46	1,0 ⁵⁾	2,8	25	41	89	6xM4	– ⁷⁾	– ⁷⁾	7
0	10,2	47	80	55	63	75	80	39	5	50	1,3	2,8	30	49	103	4xM5	14,9	7,5	7
1	10,9	55	95	65	82	90	95	48	6	67	3,0	3,5	35	56	119	8xM5	17,4	7,5	8
2	12,6	61	106	80	103	105	110	61	6	84	5,5	4	45	62	140	8xM6	19,7	8	10
3	14,7	69	130	95	118,5	125	130	74	7	104	5,5	4	50	70	156	4xM8	23,5	9	10

- 4) the dimensions A; C₆; o refer to the hub edge
5) countersunk screw with hexagon socket DIN 7991
6) dimensions in an un-tightened condition (in tightened condition shorter)
7) thrust washer without keyway, limit switch is located at the control element-front face

We reserve the right to make dimensional and design alterations.

Order example:

To be included when ordering, please state:	Size	Type	Bore $\varnothing d$ ^{H7}	Bore $\varnothing d_4$ ^{H7}	With limit switch
Order number:		454._1._			see pages 36–38


- 01 – 3 →
* medium torque range 5 →
* high torque range 6 →
* max. torque range 7 →
* see technical data, limiting torque for overload M_G
- according to size
→ according to size
→ 3 flexible coupling 92 Shore A
→ 4 flexible coupling 98 Shore A
→ 6 flexible coupling 64 Shore D
→ 0 ratchetting clutch
→ 5 synchronous clutch

Example: Order number 2 / 454.615.3 / 22/ 25 with limit switch 055.002.5

EAS[®]-NC ratchetting clutch/synchronous clutch

EAS[®]-NC with flexible backlash-free shaft coupling
NC-side keyway
lastic-side keyway

Type 454..2..

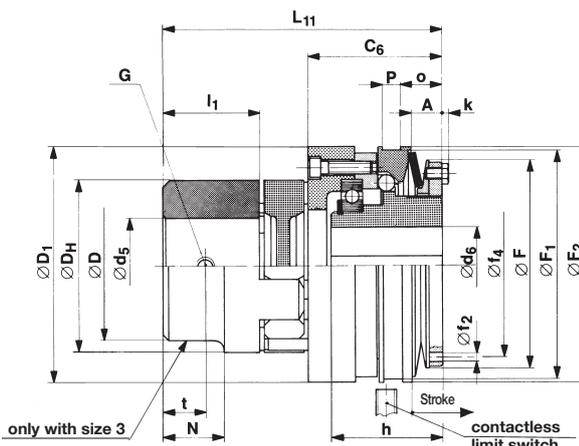

Sizes 01 – 3 Type 454..2..

Technical data

Size	Limiting torque for overload M_G			Nominal torque flexible backlash-free shaft coupling T_{KN} ¹⁾						Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Weight kg
	Type 454.52..	Type 454.62..	Type 454.72..	92 Shore A		98 Shore A		64 Shore D				
	Nm	Nm	Nm	T_{KN} Nm	$T_{KN max}$ Nm	T_{KN} Nm	$T_{KN max}$ Nm	T_{KN} Nm	$T_{KN max}$ Nm			
01	4 – 10	8 – 20	–	10	20	17	34	21	42	4000	1,2	0,95
0	8 – 20	15 – 40	23 – 60	35	70	60	120	75	150	4000	1,5	1,60
1	15 – 36	30 – 72	45 – 108	95	190	160	320	200	400	3000	1,8	2,70
2	30 – 75	60 – 150	90 – 225	190	380	325	650	405	810	2500	2,0	4,90
3	60 – 150	120 – 300	180 – 450	265	530	450	900	560	1120	2000	2,2	7,10

Size	Shaft misalignments flexible coupling							Mass moments of inertia		Bores	
	axial		radial		angular misalignments			I		Flexible side $\varnothing d_5$ mm	EAS [®] -NC side $\varnothing d$ mm
	92/98 Shore A 64 Shore D	92 Shore A	98 Shore A	64 Shore D	92 Shore A	98 Shore A	64 Shore D	Hub side kgm ²	Flexible side kgm ²		
01	1,2	0,10	0,06	0,04	1,0	0,9	0,8	0,00018	0,0001	6 – 24	9 – 20
0	1,4	0,14	0,10	0,07	1,0	0,9	0,8	0,00046	0,0004	8 – 28	12 – 20
1	1,5	0,15	0,11	0,08	1,0	0,9	0,8	0,00117	0,0010	10 – 38	15 – 25
2	1,8	0,17	0,12	0,09	1,0	0,9	0,8	0,00265	0,0020	12 – 45	22 – 35 ³⁾
3	2,0	0,19	0,14	0,1	1,0	0,9	0,8	0,00602	0,0050	14 – 55	32 – 45

1) The transmittable torques of the flexible coupling "T_{KN}" depend on factors, as for example with temperatures, torsional stiffness etc.

Please also see clutch design ROBA[®]-ES cat. K.940. or contact our company.

2) shaft fit: up to $\varnothing 38 h_6$, above $\varnothing 38 h_8$

3) up to $\varnothing 33$ keyway to DIN 6885/1, above $\varnothing 33$ keyway to DIN 6885/3

Dimensions

Size	A ⁴⁾	C ₆	D	D ₁	D _H	F	F ₁	F ₂	f ₂	f ₄	G	h	k	l ₁	L ₁₁	N	o ⁴⁾	p	t
01	9,5	38	–	65	40	57	–	65	5	46	M5	33	1,0 ⁵⁾	25	80	–	– ⁷⁾	– ⁷⁾	10
0	10,2	47	–	80	55	63	75	80	5	50	M5	41	1,3	30	95	–	14,9	7,5	10
1	10,9	55	–	95	65	82	90	95	6	67	M6	47	3,0	35	110	–	17,4	7,5	15
2	12,6	61	–	106	80	103	105	110	6	84	M8	52	5,5	45	130	–	19,7	8	15
3	14,7	69	75	130	95	118,5	125	130	7	104	M8	59	5,5	50	145	28	23,5	9	20

4) the dimensions A; C₆; o refer to the hub edge

5) countersunk screw with hexagon socket DIN 7991

7) thrust washer without keyway, limit switch is located at the control element-front face

We reserve the right to make dimensional and design alterations.

Order example:

To be included when ordering, please state:	Size	Type	Bore $\varnothing d_6^{H7}$	Bore $\varnothing d_5^{H7}$	With limit switch
Order number:		454..2..			see pages 36–38

01 – 3 →


* medium torque range..... 5 →
* high torque range..... 6 →
* max. torque range 7 →
* see technical data, limiting torque for overload M_G

→ according to size
→ according to size
→ 3 flexible coupling 92 Shore A
→ 4 flexible coupling 98 Shore A
→ 6 flexible coupling 64 Shore D
→ 0 ratchetting clutch
→ 5 synchronous clutch


Example: Order number 2 / 454.625.3 / 22/ 25 with limit switch 055.002.5

Short hub with fitting dimensions
of the type series 400
and cone bushing

Type 451_1_0

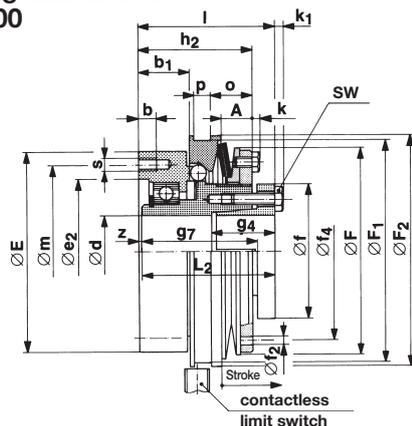

Sizes 01 – 3

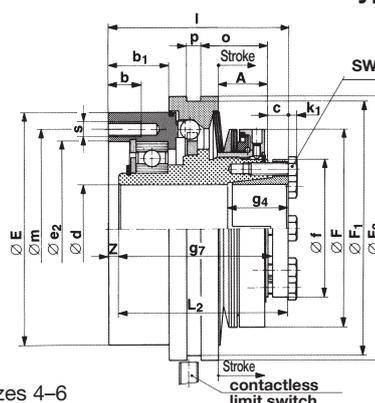

Sizes 4–6

Technical data

1) Size	Limiting torques for overload $M_G^{1)}$				Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Mass moments of inertia I		Weight kg	Clamping bolts and tightening torques for $\varnothing d$	
	Type 451.41_0 Nm	Type 451.51_0 Nm	Type 451.61_0 Nm	Type 451.71_0 Nm			Hub side kgm ²	Pressure flange side kgm ²		mm	Nm
01	–	4 – 10	8 – 20	12 – 30	4000	1,2	0,000191	0,000091	0,62	4 x M4	3,5
1	–	15 – 36	30 – 72	45 – 108	3000	1,8	0,001194	0,000572	1,78	6 x M5	5,5
2	–	30 – 75	60 – 150	90 – 225	2500	2,0	0,00270	0,00121	3,27	6 x M6	9,5
3	–	60 – 150	120 – 300	180 – 450	2000	2,2	0,00614	0,00280	4,34	8 x M6	9,5
4	75 – 150	150 – 300	300 – 600	–	400	2,5	0,03211	0,01548	10,3	8 x M8	20
5	150 – 300	300 – 600	600 – 1200	–	400	2,8	0,05325	0,03732	17,0	8 x M10	40
6	300 – 600	600 – 1200	1200 – 2400	–	300	3,4	0,07178	0,03783	21,0	8 x M12	60

Dimensions

Size	Bore $d^{2)}$ from – to mm	Min. shaft length		A ⁷⁾	b	b ₁	c	E	e ₂ ^{H7 6)}	F	F ₁	F ₂
		g ₄ mm	g ₇ mm									
01	9 – 16	18	36	9,5	8	18,5	–	55	42 ^{M7}	57	– ⁵⁾	65
1	15 – 25	27	49	10,9	10	23,1	–	82	62 ^{M7}	82	90	95
2	22 – 35	29	54	12,6	10	21,8	–	100	78	103	105	110
3	32 – 45	32	61	14,7	12	24,5	–	120	90,5	118,5	125	130
4	35 – 55	38	96	31	20	37,5	13	146	110	125	160	166
5	42 – 65	51	111	36,5	25	42	16	176	130	145	185	196
6	50 – 75	60	117	38	26	44	20	186	145	165	214	220

Size	f	f ₂	f ₄	h ₂ ⁷⁾	k	k ₁	L ₂ ³⁾	l ³⁾	m	o ⁷⁾	p	s	SW	z
01	35	5	46	37	0,3 ⁴⁾	2,8	41	45	48	– ⁵⁾	– ⁵⁾	6 x M5	7	4
1	48	6	67	51	3,0	3,5	56	60	70	17,4	7,5	6 x M5	8	4
2	61	6	84	54	5,3	4	62	64	89	19,7	8	6 x M6	10	2
3	74	7	104	61,5	5,3	4	70	72,5	105	23,5	9	6 x M8	10	2,5
4	87	–	–	–	–	5,5	106	112,5	125	42	9	6 x M10	13	6,5
5	110	–	–	–	–	7	123	129,5	155	48,5	9	6 x M12	17	6,5
6	124	–	–	–	–	8	132	139	160	46	9	6 x M12	19	7

- 1) other sizes for lower and higher torques on request
- 2) shaft fit: up to $\varnothing 38 h_8$, above $\varnothing 38 h_8$
- 3) dimensions in an un-tightened condition (in a tightend condition shorter)
- 4) countersunk screw with hexagon socket DIN 7991
- 5) thrust washer without keyway, limit switch is located at the control element-front face

We reserve the right to make dimensional and design alterations.

- 6) H7 beside of sizes 01 and 1
- 7) for sizes 01–3 the dimensions A; h₂; o refer to the hub edge

Order example:

To be included when ordering, please state:	Size	Type	Bore $\varnothing d^{H7}$	With limit switch
Order number:		451_1_0		see pages 36–38

- 01 – 6 →
- * low torque range 4 →
- * medium torque range 5 →
- * high torque range 6 →
- * max. torque range 7 →
- according to size
- 0 ratchetting clutch
- 5 synchronous clutch


* see technical data, limiting torque for overload M_G

Example: Order number 6 / 451.610.0 / 60 / 6885-1 with limit switch 055.002.5


EAS[®]-NC ratchetting clutch/synchronous clutch

Short hub with fitting dimensions
of the type series 400
and keyway

Type 451._2_.0

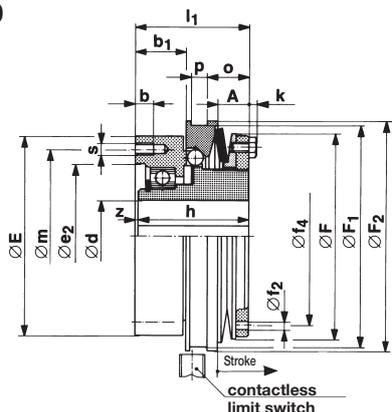

Sizes 01 – 3

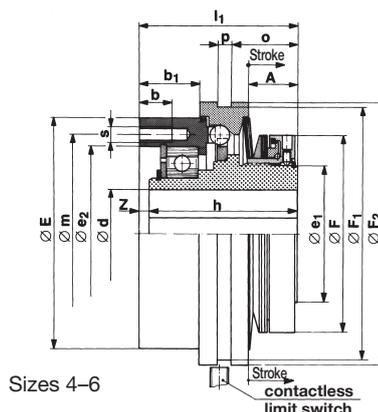

Sizes 4–6

Technical data

1) Size	Limiting torques for overload M_G 1)				Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Mass moments of inertia I		Weight kg
	Type 451.42_0 Nm	Type 451.52_0 Nm	Type 451.62_0 Nm	Type 451.72_0 Nm			Hub side kgm ²	Pressure flange side kgm ²	
01	–	4 – 10	8 – 20	12 – 30	4000	1,2	0,000190	0,000091	0,57
1	–	15 – 36	30 – 72	45 – 108	3000	1,8	0,001191	0,000572	1,77
2	–	30 – 75	60 – 150	90 – 225	2500	2,0	0,00265	0,00121	3,10
3	–	60 – 150	120 – 300	180 – 450	2000	2,2	0,00596	0,00280	4,11
4	75 – 150	150 – 300	300 – 600	–	400	2,5	0,03173	0,01548	10,4
5	150 – 300	300 – 600	600 – 1200	–	400	2,8	0,04960	0,03732	16,9
6	300 – 600	600 – 1200	1200 – 2400	–	300	3,4	0,06921	0,03783	20,5

Dimensions

Size	Bore		A 6)	b	b ₁	E	e ₁	e ₂ H7 5)	F	F ₁
	d _{min} mm	d _{max} mm								
01	9	20	9,5	8	18,5	55	–	42 M7	57	– 3)
1	15	25	10,9	10	23,1	82	–	62 M7	82	90
2	22	35 4)	12,6	10	21,8	100	–	78	103	105
3	32	45	14,7	12	24,5	120	–	90,5	118,5	125
4	22	55	31	20	37,5	146	87	110	125	160
5	28	65	36,5	25	42	176	102,5	130	145	185
6	45	75	38	26	44	186	125	145	165	214

Size	F ₂	f ₂	f ₄	h	k	l ₁ 6)	m	o 6)	p	s	z
01	65	5	46	33	1,0 2)	37	48	– 3)	– 3)	6 x M5	4
1	95	6	67	47	3,0	51	70	17,4	7,5	6 x M5	4
2	110	6	84	52	5,3	54	89	19,7	8	6 x M6	2
3	130	7	104	59	5,3	61,5	105	23,5	9	6 x M8	2,5
4	166	–	–	93	–	99,5	125	42	9	6 x M10	6,5
5	196	–	–	107	–	113,5	155	48,5	9	6 x M12	6,5
6	220	–	–	112	–	119	160	46	9	6 x M12	7

- 1) other sizes for lower and higher torques on request
- 2) countersunk screw with hexagon socket DIN 7991
- 3) thrust washer without keyway, limit switch is located at the control element-front face
- 4) up to Ø 33 keyway to DIN 6885/1, above Ø 33 keyway to DIN 6885/3
- 5) H7 beside of sizes 01 and 1

We reserve the right to make dimensional and design alterations.

- 6) for sizes 01–3 the dimensions A; l₁; o refer to the hub edge
- 7) Position of the keyway to the mounting bore "s" in the pressure flange not defined. A defined position is possible on request.

Order example:


To be included when ordering, please state:	Size	Type	Bore Ø d H7	With limit switch
Order number:		451._2_.0	7)	see pages 36–38

- 01 – 6 →
- * low torque range 4 →
- * medium torque range 5 →
- * high torque range 6 →
- * max. torque range 7 →
- * see technical data, limiting torque for overload M_G
- according to size
- 0 ratchetting clutch
- 5 synchronous clutch


Example: Order number 6 / 451.620.0 / 60 / 6885-1 with limit switch 055.002.5

Long projecting hub
with cone bushing
and fitting dimensions
of the type series 400

Type 451_1_1

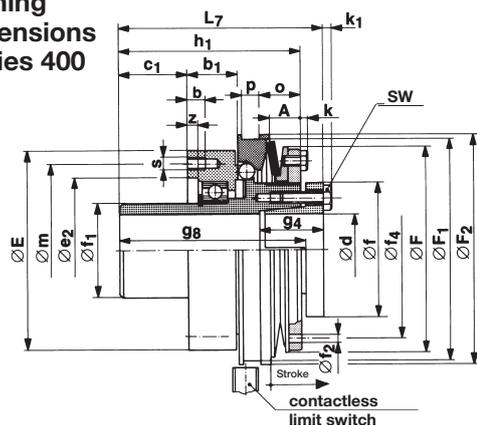

Sizes 01 – 3

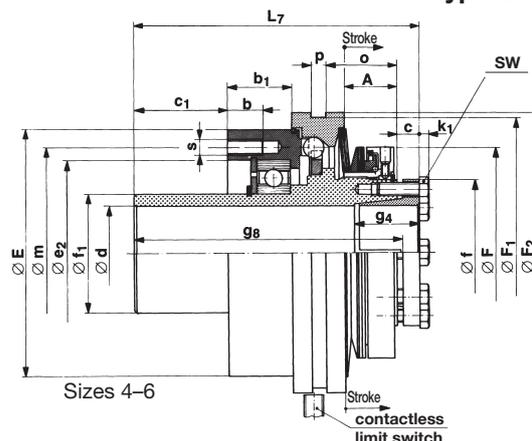

Sizes 4–6

Technical data

1) Size	Limiting torques for overload M_G 1)				Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Mass moments of inertia I		Weight kg	Clamping bolts and tightening torques for $\varnothing d$	
	Type 451.41_1 Nm	Type 451.51_1 Nm	Type 451.61_1 Nm	Type 451.71_1 Nm			Hub side mm	Pressure flange side kgm^2		mm	Nm
01	–	4 – 10	8 – 20	12 – 30	4000	1,2	0,00025	0,000091	0,70	4 x M4	3,5
1	–	15 – 36	30 – 72	45 – 108	3000	1,8	0,00125	0,000572	1,93	6 x M5	5,5
2	–	30 – 75	60 – 150	90 – 225	2500	2,0	0,00284	0,00121	3,69	6 x M6	9,5
3	–	60 – 150	120 – 300	180 – 450	2000	2,2	0,00670	0,00280	5,42	8 x M6	9,5
4	75 – 150	150 – 300	300 – 600	–	400	2,5	0,03313	0,01548	11,7	8 x M8	20
5	150 – 300	300 – 600	600 – 1200	–	400	2,8	0,05325	0,03732	19,1	8 x M10	40
6	300 – 600	600 – 1200	1200 – 2400	–	300	3,4	0,07590	0,03783	24,0	8 x M12	60

Dimensions

Size	Bore d 2) from – to mm	Min. shaft length		A 7)	b	b_1	c	c_1	E	e_2 H7 6)	F	F_1	F_2
		g_4 mm	g_8 mm										
01	9 – 16	18	61	9,5	8	18,5	–	21	55	42 M7	57	– 5)	65
1	15 – 25	27	79	10,9	10	23,1	–	26	82	62 M7	82	90	95
2	22 – 35	29	92	12,6	10	21,8	–	36	100	78	103	105	110
3	32 – 45	32	111	14,7	12	24,5	–	47,5	120	90,5	118,5	125	130
4	35 – 55	38	155	31	20	37,5	13	52,5	146	110	125	160	166
5	42 – 65	51	175	36,5	25	42	16	57,5	176	130	145	185	196
6	50 – 75	60	188	38	26	44	20	64	186	145	165	214	220

Size	f	f_1 h6	f_2	f_4	h_1 7)	k	k_1	L_7 3)	m	o 7)	p	s	SW	z
01	35	30	5	46	58	1,0 4)	2,8	66	48	– 5)	– 5)	6 x M5	7	5,5
1	48	40	6	67	77	3,0	3,5	86	70	17,4	7,5	6 x M5	8	7,25
2	61	50	6	84	90	5,3	4	100	89	19,7	8	6 x M6	10	5
3	74	65	7	104	109	5,3	4	120	105	23,5	9	6 x M8	10	5
4	87	70	–	–	–	–	5,5	165	125	42	9	6 x M10	13	–
5	110	85	–	–	–	–	7	187	155	48,5	9	6 x M12	17	–
6	124	95	–	–	–	–	8	203	160	46	9	6 x M12	19	–

- 1) other sizes for lower and higher torques on request
- 2) shaft fit: up to $\varnothing 38 h_8$, above $\varnothing 38 h_8$
- 3) dimensions in an un-tightened condition (in tightened condition shorter)
- 4) countersunk screw with hexagon socket DIN 7991
- 5) thrust washer without keyway, limit switch is located at the control element-front face

We reserve the right to make dimensional and design alterations.

- 6) H7 beside of sizes 01 and 1
- 7) for sizes 01–3 the dimensions A; h_1 ; o refer to the hub edge

Order example:

To be included when ordering, please state:	Size	Type	Bore $\varnothing d$ H7	With limit switch
Order number:		4 5 1 . _ 1 . 1		see pages 36–38

- 01 – 6 →
- * low torque range 4
 - * medium torque range 5
 - * high torque range 6
 - * max. torque range 7
- according to size
→ 0 ratchetting clutch
→ 5 synchronous clutch


* see technical data, limiting torque for overload M_G

Example: Order number 4 / 451.610.1 / 40 with limit switch 055.002.5


EAS[®]-NC ratchetting clutch/synchronous clutch

Long projecting hub with keyway
and fitting dimensions
of the type series 400

Type 451._2_.1

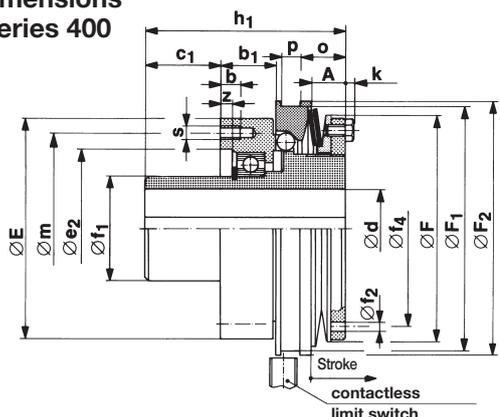

Sizes 01 – 3

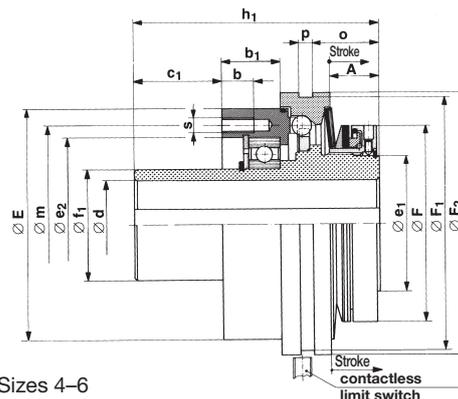

Sizes 4–6

Technical data

1) Size	Limiting torques for overload M_G 1)				Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Mass moments of inertia I		Weight kg
	Type 451.42_.1 Nm	Type 451.52_.1 Nm	Type 451.62_.1 Nm	Type 451.72_.1 Nm			Hub side kgm ²	Pressure flange side kgm ²	
01	–	4 – 10	8 – 20	12 – 30	4000	1,2	0,00025	0,000091	0,65
1	–	15 – 36	30 – 72	45 – 108	3000	1,8	0,00125	0,000572	1,92
2	–	30 – 75	60 – 150	90 – 225	2500	2,0	0,00279	0,00121	3,52
3	–	60 – 150	120 – 300	180 – 450	2000	2,2	0,00652	0,00280	5,19
4	75 – 150	150 – 300	300 – 600	–	400	2,5	0,03224	0,01548	12,0
5	150 – 300	300 – 600	600 – 1200	–	400	2,8	0,05215	0,03732	19,5
6	300 – 600	600 – 1200	1200 – 2400	–	300	3,4	0,07353	0,03783	23,8

Dimensions

Size	Bore		A 6)	b	b ₁	c ₁	E	e ₁	H7 5) e ₂	F
	d _{min} mm	d _{max} mm								
01	9	20	9,5	8	18,5	21	55	–	42 M7	57
1	15	25	10,9	10	23,1	26	82	–	62 M7	82
2	22	35 4)	12,6	10	21,8	36	100	–	78	103
3	32	45	14,7	12	24,5	47,5	120	–	90,5	118,5
4	22	55	31	20	37,5	52,5	146	87	110	125
5	28	65	36,5	25	42	57,5	176	102,5	130	145
6	45	75	38	26	44	64	186	125	145	165

Size	F ₁	F ₂	f ₁ h6	f ₂	f ₄	h ₁ 6)	k	m	o 6)	p	s	z
01	– 3)	65	30	5	46	58	1,0 2)	48	– 3)	– 3)	6 x M5	5,5
1	90	95	40	6	67	77	3,0	70	17,4	7,5	6 x M5	7,25
2	105	110	50	6	84	90	5,3	89	19,7	8	6 x M6	5
3	125	130	65	7	104	109	5,3	105	23,5	9	6 x M8	5
4	160	166	70	–	–	152	–	125	42	9	6 x M10	–
5	185	196	85	–	–	171	–	155	48,5	9	6 x M12	–
6	214	220	95	–	–	183	–	160	46	9	6 x M12	–

- 1) other sizes for lower and higher torques on request
- 2) countersunk screw with hexagon socket DIN 7991
- 3) thrust washer without keyway, limit switch is located at the control element-front face
- 4) up to Ø 33 keyway to DIN 6885/1, above Ø 33 keyway to DIN 6885/3

We reserve the right to make dimensional and design alterations.

- 5) H7 beside of sizes 01 and 1
- 6) for sizes 01–3 the dimensions A; h₁; o refer to the hub edge
- 7) Position of the keyway to the mounting bore "s" in the pressure flange not defined. A defined position is possible on request.

Order example:


To be included when ordering, please state:	Size	Type	Bore Ø d H7	With limit switch
Order number:		451._2_.1	7)	see pages 36–38

- 01 – 6 →
- * low torque range 4 →
 - * medium torque range 5 →
 - * high torque range 6 →
 - * max. torque range 7 →
- * see technical data, limiting torque for overload M_G
- according to size
→ 0 ratchetting clutch
→ 5 synchronous clutch

Example: Order number 6 / 451.520.1 / 60 / 6885-1 with limit switch 055.002.5

Short supported hub with cone bushing
and fitting dimensions of
the type series 400

Type 451._1_.5

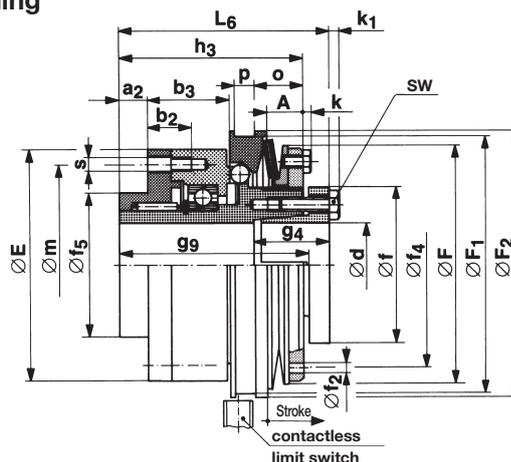

Sizes 01 – 3 Type 451._1_.5

Technical data

1) Size	Limiting torques for overload M_G 1)			Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Mass moments of inertia I		Weight kg	Clamping bolts and tightening torques for Ø d	
	Type 451.51_.5 Nm	Type 451.61_.5 Nm	Type 451.71_.5 Nm			Hub side kgm ²	Pressure flange side kgm ²		mm	Nm
01	4 – 10	8 – 20	12 – 30	4000	1,2	0,000201	0,000121	0,82	4 x M4	3,5
1	15 – 36	30 – 72	45 – 108	3000	1,8	0,001224	0,000862	2,28	6 x M5	5,5
2	30 – 75	60 – 150	90 – 225	2500	2,0	0,00285	0,00154	3,57	6 x M6	9,5
3	60 – 150	120 – 300	180 – 450	2000	2,2	0,00638	0,00384	5,64	8 x M6	9,5

Dimensions

Size	Bore d 2) from-to mm	Min. shaft length		A 6)	a ₂	b ₂	b ₃	E	F	F ₁	F ₂
		g ₄ mm	g ₉ mm								
01	9 – 16	18	52,5	9,5	8	12,5	23	55	57	– 5)	65
1	15 – 25	27	71	10,9	10	18	31,1	82	82	90	95
2	22 – 35	29	73	12,6	12	15	26,8	100	103	105	110
3	32 – 45	32	81,5	14,7	12	18	30,5	120	118,5	125	130

Size	f	f ₂	f ₄	f ₅ h ₆	h ₃ 6)	k	k ₁	L ₆ 3)	m	o 6)	p	s	SW
01	35	5	46	38	49,5	1,0 4)	2,8	57,5	48	– 5)	– 5)	6 x M5	7
1	48	6	67	50	69	3,0	3,5	78	70	17,4	7,5	6 x M5	8
2	61	6	84	60	71	5,3	4	81	89	19,7	8	6 x M6	10
3	74	7	104	80	79,5	5,3	4	90,5	105	23,5	9	6 x M8	10

- 1) other sizes for lower and higher torques on request
- 2) shaft fit: up to Ø 38 h₆, above Ø 38 h₈
- 3) dimensions in an un-tightened condition (in tightened condition shorter)
- 4) countersunk screw with hexagon socket DIN 7991
- 5) thrust washer without keyway, limit switch is located at the control element-front face
- 6) the dimensions A; h₃; o refer to the hub edge

We reserve the right to make dimensional and design alterations.

Order example:

To be included when ordering, please state:	Size	Type	Bore Ø d H7	With limit switch
Order number:		451._1_.5		see pages 36–38


- 01 – 3 → according to size
 * medium torque range. 5 → 0 ratchetting clutch
 * high torque range. 6 → 5 synchronous clutch
 * max. torque range 7 →
- * see technical data, limiting torque for overload M_G

Example: Order number 2 / 451.510.5 / 30 with limit switch 055.002.5

EAS[®]-NC ratchetting clutch/synchronous clutch

Short supported hub with keyway
and fitting dimensions of
the type series 400

Type 451._2_.5

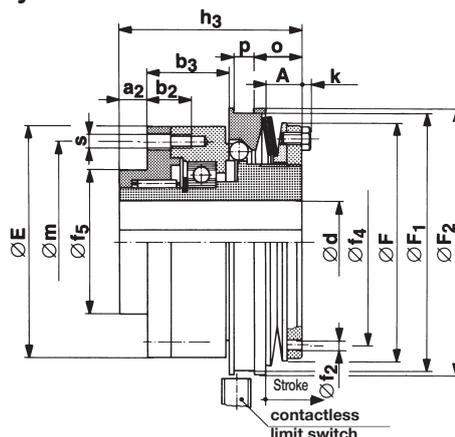

Sizes 01 – 3 Type 451._2_.5

Technical data

1) Size	Limiting torques for overload M_G 1)			Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Mass moments of inertia I		Weight kg
	Type 451.52_.5 Nm	Type 451.62_.5 Nm	Type 451.72_.5 Nm			Hub side kgm ²	Pressure flange side kgm ²	
01	4 – 10	8 – 20	12 – 30	4000	1,2	0,000200	0,000121	0,77
1	15 – 36	30 – 72	45 – 108	3000	1,8	0,001221	0,000862	2,77
2	30 – 75	60 – 150	90 – 225	2500	2,0	0,00280	0,00154	3,40
3	60 – 150	120 – 300	180 – 450	2000	2,2	0,00620	0,00384	5,41

Dimensions

Size	Bore		A 5)	a ₂	b ₂	b ₃	E	F	F ₁	F ₂
	d _{min} mm	d _{max} mm								
01	9	20	9,5	8	12,5	23	55	57	-- 4)	65
1	15	25	10,9	10	18	31,1	82	82	90	95
2	22	35 3)	12,6	12	15	26,8	100	103	105	110
3	32	45	14,7	12	18	30,5	120	118,5	125	130

Size	f ₂	f ₄	f ₅ h ₆	h ₃ 5)	k	m	o 5)	p	s
01	5	46	38	49,5	1,0 2)	48	-- 4)	-- 4)	6 x M5
1	6	67	50	69	3,0	70	17,4	7,5	6 x M6
2	6	84	60	71	5,3	89	19,7	8	6 x M6
3	7	104	80	79,5	5,3	105	23,5	9	6 x M8

- 1) other sizes for lower and higher torques on request
- 2) countersunk screw with hexagon socket DIN 7991
- 3) up to Ø 33 keyway to DIN 6885/1, above Ø 33 keyway to DIN 6885/3
- 4) thrust washer without keyway, limit switch is located at the control element-front face
- 5) the dimensions A; h₃; o refer to the hub edge
- 6) Position of the keyway to the mounting bore "s" in the pressure flange not defined.
A defined position is possible on request.

We reserve the right to make dimensional and design alterations.

Order example:


To be included when ordering, please state:	Size	Type	Bore Ø d ^{H7}	With limit switch
Order number:		4 5 1 . _ 2 . 5	6)	see pages 36–38

- 01 – 3 → according to size
 * medium torque range. 5 → 0 ratchetting clutch
 * high torque range. 6 → 5 synchronous clutch
 * max. torque range 7 →
- * see technical data, limiting torque for overload M_G

Example: Order number 2 / 451.520.5 / 30 / 6885-1 with limit switch 055.002.5

Torsionally rigid with cone bushing

Type 456._1_.8

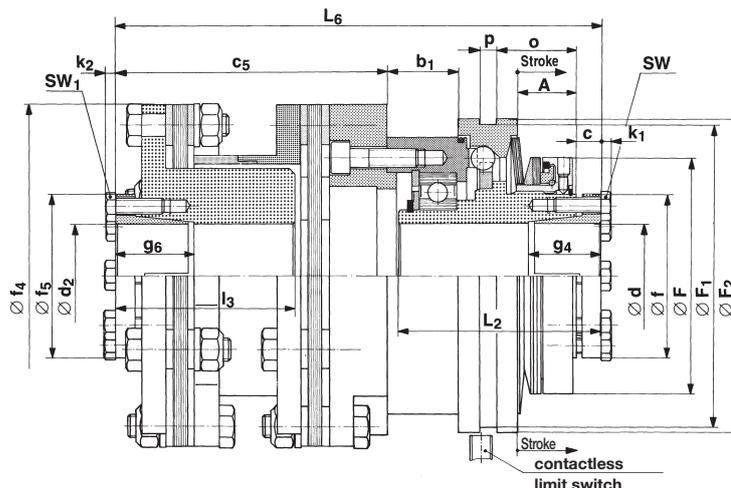

Sizes 4 – 6 Type 456._1_.8

Technical data

1) Size	Limiting torques for overload M_G 1)			Nominal torque of flexible torsionally rigid coupling T_{KN} Nm	Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Permissible flexibility		
	Type 456.41_.8 Nm	Type 456.51_.8 Nm	Type 456.61_.8 Nm				axial ΔK_a mm	angular ΔK_w °	radial ΔK_r mm
4	75 – 150	150 – 300	300 – 600	1000	400	2,5	1,6	2	2,2
5	150 – 300	300 – 600	600 – 1200	1600	400	2,8	1,8	2	2,2
6	300 – 600	600 – 1200	1200 – 2400	2500	300	3,4	1,8	2	2,5

Size	Mass moments of inertia I		Weight kg	Clamping bolts and tightening torques				Bore 2)		Min. shaft length	
	Hub side kgm^2	Flexible side kgm^2		at $\varnothing d$		at $\varnothing d_2$		d from – to mm	d_2 from – to mm	g_4 mm	g_6 mm
4	0,03211	0,07278	25,8	8 x M8	20	8 x M10	30	35 – 55	42 – 65	38	51
5	0,05083	0,16973	39,6	8 x M10	40	8 x M12	40	42 – 65	50 – 75	51	60
6	0,07179	0,17255	46,5	8 x M12	60	8 x M12	60	50 – 75	55 – 85	60	60

Dimensions

Size	A	b_1	c	c_5 3)	F	F_1	F_2	f	f_4	f_5
4	31	37,5	13	198	125	160	166	87	180	110
5	36,5	42	16	208	145	185	196	110	200	124
6	38	44	20	228	165	214	220	124	215	135

Size	k_1	k_2	L_2 3)	L_6 3)	l_3 3)	o	p	SW	SW_1
4	5,5	7	106	310,5	96	42	9	13	17
5	7	8	123	337,5	100	48,5	9	17	19
6	8	9	132	367	110	46	9	19	19

1) other sizes for lower and higher torques on request

We reserve the right to make dimensional and design alterations.

2) shaft fit: up to $\varnothing 38_{H6}$, above $\varnothing 38_{H8}$

3) dimensions in an un-tightened condition (in a tightened condition shorter)

Order example:

To be included when ordering, please state:	Size	Type	Bore $\varnothing d_{H7}$	Bore $\varnothing d_2_{H7}$	With limit switch
Order number:		4 5 6 . _ 1 . 8			see pages 36 – 38


4 – 6 → according to size
 * low torque range 4 → according to size
 * medium torque range 5 → 0 ratchetting clutch
 * high torque range 6 → 5 synchronous clutch
 * see technical data, limiting torque for overload M_G

Example: Order number 6 / 456.510.8 / 50 / 60 plus limit switch 055.002.5

EAS[®]-NC ratchetting clutch/synchronous clutch

Torsionally rigid with keyway

Type 456._2_.8

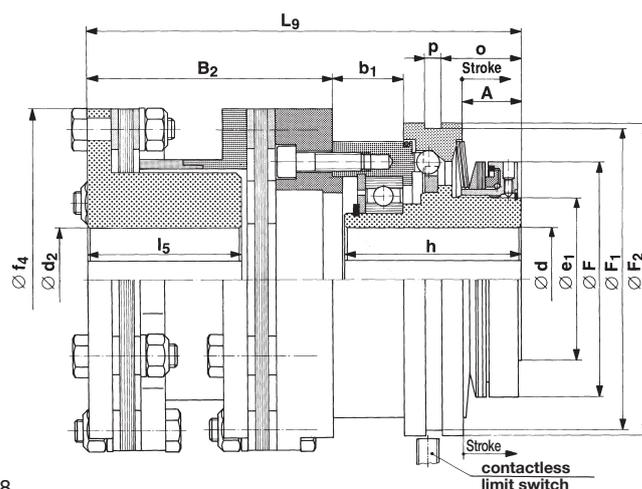

Sizes 4 – 6 Type 456._2_.8

Technical data

1) Size	Limiting torques for overload M_G 1)			Nominal torque of flexible torsionally rigid coupling T_{KN} Nm	Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Permissible flexibility		
	Type 456.42._8 Nm	Type 456.52._8 Nm	Type 456.62._8 Nm				axial ΔK_a mm	angular ΔK_w °	radial ΔK_r Sleeve 1 mm
4	75 – 150	150 – 300	300 – 600	1000	400	2,5	1,6	2	2,2
5	150 – 300	300 – 600	600 – 1200	1600	400	2,8	1,8	2	2,2
6	300 – 600	600 – 1200	1200 – 2400	2500	300	3,4	1,8	2	2,5

Size	Mass moments of inertia I		Weight kg	Bore			
	Hub side kgm^2	Flexible side kgm^2		d_{min} mm	d_{max} mm	d_2 min mm	d_2 max mm
4	0,03173	0,07151	25,8	22	55	28	80
5	0,04960	0,11552	35,2	28	65	30	85
6	0,06921	0,14818	45,4	45	75	38	90

Dimensions

Size	A	B ₂	b ₁	e ₁	F	F ₁
4	31	182	37,5	87	125	160
5	36,5	188	42	102,5	145	185
6	38	208	44	125	165	214

Size	F ₂	f ₄	h	L ₉	l ₅	o	p
4	166	180	93	281,5	80	42	9
5	196	200	107	301,5	80	48,5	9
6	220	215	112	327	90	46	9

1) other sizes for lower and higher torques on request

We reserve the right to make dimensional and design alterations.

Order example:


To be included when ordering, please state:	Size	Type	Bore $\varnothing d^{H7}$	Bore $\varnothing d_2^{H7}$	With limit switch
Order number:		4 5 6 . _ 2 . _ 8			see pages 36 – 38

- 4 – 6 →
- * low torque range 4 →
 - * medium torque range. 5 →
 - * high torque range 6 →
- * see technical data, limiting torque for overload M_G
- according to size
→ according to size
→ 0 ratchetting clutch
→ 5 synchronous clutch

Example: Order number 4 / 456.520.8 / 50 / 6885-1 / 60 / 6885-1 with limit switch 055.002.5

Lastic with
Keyway EAS[®]-side
keyway lastic-side

Type 457._2_.0

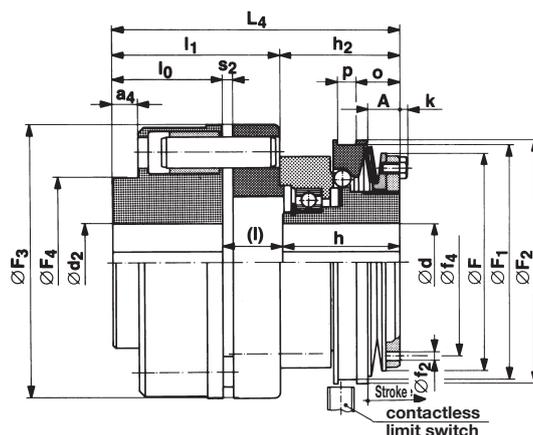

Sizes 01 – 3 Type 457._2_.0

Technical data

1) Size	Limiting torques for overload M_G 1)		Nominal torque of flexible torsionally rigid coupling T_{KN} Nm	Max. speed n_{max} rpm	Stroke of the thrust washer in the event of an overload mm	Permissible flexibility		
	Type 457.52_.0 Nm	Type 457.62_.0 Nm				axial ΔK_a mm	angular ΔK_w °	radial ΔK_r mm
01	4 – 10	8 – 20	75	4000	1,2	±1	0,5	0,5
1	15 – 36	30 – 72	150	3000	1,8	±1	0,5	0,5
2	30 – 75	60 – 150	150	2500	2,0	±1	0,5	0,5
3	60 – 150	120 – 300	300	2000	2,2	±1	0,5	0,5

Size	Mass moments of inertia I		Weight kg	Bore d from – to mm	Bore	
	Hub side kgm ²	Flexible Side kgm ²			d_2 min mm	d_2 max mm
01	0,000190	0,000811	1,57	9 – 20	11	30
1	0,001191	0,00365	4,1	15 – 25	11	42
2	0,00265	0,00413	5,2	22 – 35 ³⁾	11	42
3	0,00596	0,01133	8,6	32 – 45	13	60

Dimensions

Size	A ⁵⁾	a ₄	F	F ₁	F ₂	F ₃	F ₄	f ₂	f ₄
01	9,5	7	57	– ⁴⁾	65	80	50	5	46
1	10,9	10	82	90	95	105	65	6	67
2	12,6	10	103	105	110	105	65	6	84
3	14,7	19	118,5	125	130	135	85	7	104

Size	h	h ₂ ⁵⁾	k	L ₄ ⁵⁾	l	l ₀	l ₁	o ⁵⁾	p	s ₂
01	33	37	1,0 ²⁾	86	23	30	49	– ⁴⁾	– ⁴⁾	4
1	47	51	3,0	113	24	42	62	17,4	7,5	4
2	52	54	5,3	118	24	42	64	19,7	8	4
3	59	61,5	5,3	142,5	28,5	55	81	23,5	9	4

- 1) other sizes for lower and higher torques on request
- 2) countersunk screw with hexagon socket DIN 7991
- 3) up to Ø 33 keyway acc. DIN 6885/1, over Ø 33 keyway acc. DIN 6885/3.
- 4) thrust washer without keyway, limit switch is located at the control element-front face
- 5) the dimensions A; h; o refer to the hub edge

We reserve the right to make dimensional and design alterations.

Order example:

To be included when ordering, please state:	Size	Type	Bore Ø d ^{H7}	Bore Ø d ₂ ^{H7}	With limit switch
Order number:		457._2_.0			see pages 36–38

- 01 – 3 →
 * medium torque range. 5 →
 * high torque range. 6 →
- according to size
 → according to size
 → 0 ratchetting clutch
 → 5 synchronous clutch

* see technical data, limiting torque for overload M_G

Example: Order number 3 / 457.525.0 / 30 / 6885-1 / 40 / 6885-1 with limit switch 055.002.5

EAS[®]-NC ratchetting clutch/synchronous clutch

Mounting example

Fig. 1

EAS[®]-NC Short hub

For the EAS[®]-NC short hub the drive elements are located over the deep groove ball bearing and attached to the pressure flange. If the resulting radial force of the drive element is nearly in the middle of the ball bearing, an additional support for the drive element is not necessary.

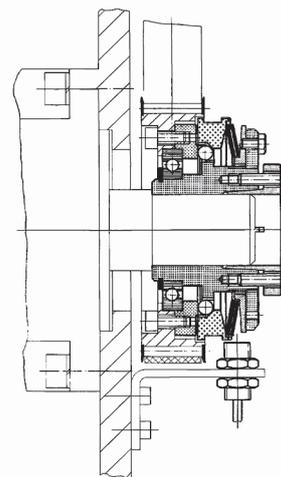


Fig. 2

EAS[®]-NC with long projecting hub

For very wide drive elements or for elements with very small diameters our EAS[®]-NC with long projecting hub is recommended. In case of small diameters the drive element is attached to the pressure flange of the clutch via an intermediate flange supplied by the customer. The support for the drive element via a ball bearing, needle bearing or slide bearing depending on the mounting situation and available space can be used.

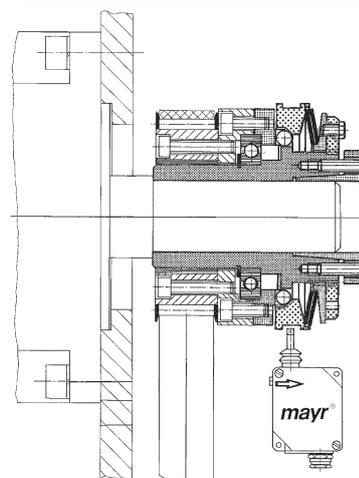


Fig. 3

EAS[®]-NC Type 450._1_.2

Two bearings-design for wide drive elements, whose application of force of the resulting radial force is in the middle of both bearings.

In this case the drive element can be attached directly to the pressure flange without additional support.

Please Observe (for Figs. 1-3)

The screw quality and the tightening torque for the fixing screws on the drive element are to be selected so that the set limit torque can be transmitted with sufficient certainty via frictional locking.

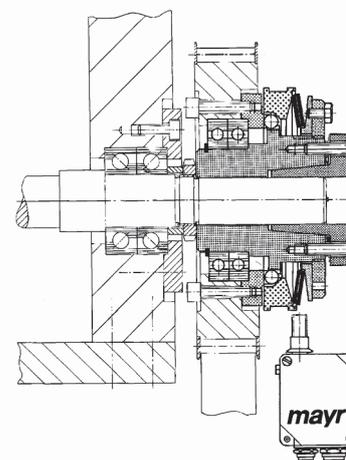


Fig. 4

EAS[®]-NC with steel bellows coupling

EAS[®]-NC with torsionally rigid flexible steel bellows coupling for connection of two shafts. The coupling compensates axial, radial and angular shaft misalignments. It is torsionally rigid in a circumferential direction. In comparison to the EAS[®]-NC with ROBA[®]-D coupling the EAS[®]-NC steel bellows coupling has a low mass moment of inertia.

In the mounting example shown on the right side, the EAS[®]-NC with steel bellows coupling is mounted between motor and ball screw spindle. The torque is transmitted backlash-free until disengagement and drops immediately after the event of an overload. The contactless limit switch (initiator) gives signal to switch off the drive.

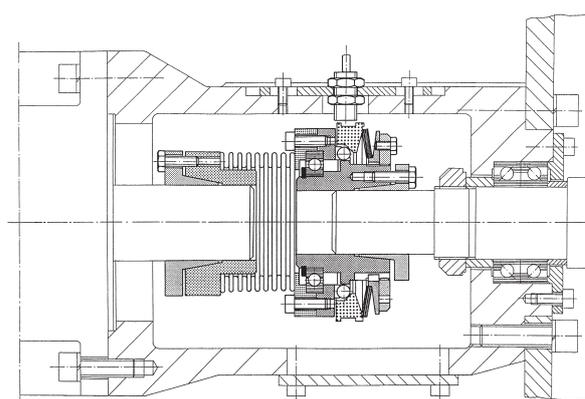


Table: Coordination bore diameter d₃ / d₄ or the flexible coupling to transmittable torque „T_{KN}“ with EAS[®]-NC Type 454._0_.0 / 454._1_._.

Size	Preferred bores Ø d ₃ / Ø d ₄ and appropriate transmittable torques T _{KN} [Nm] of the friction tight of the clamping hubs / shrink discs with Type 454._0_.0																																	
	Ø 10		Ø 11		Ø 15		Ø 16		Ø 19		Ø 20		Ø 22		Ø 24		Ø 25		Ø 28		Ø 30		Ø 32		Ø 35		Ø 38		Ø 40		Ø 42		Ø 45	
	d ₃	d ₄	d ₃	d ₄	d ₃	d ₄	d ₃	d ₄	d ₃	d ₄	d ₃	d ₄	d ₃	d ₄	d ₃	d ₄	d ₃	d ₄	d ₃	d ₄	d ₃	d ₄	d ₃	d ₄	d ₃	d ₄	d ₃	d ₄	d ₃	d ₄	d ₃	d ₄	d ₃	d ₄
01	23	33	25	38	34	61	36	67	43	84	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0	-	-	-	-	34	56	36	62	43	81	45	87	50	100	54	120	57	125	63	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1	-	-	-	-	-	-	-	-	79	147	83	153	91	177	100	203	104	216	116	256	124	282	133	308	145	343	-	-	-	-	-	-	-	-
2	-	-	-	-	-	-	-	-	-	-	83	197	91	228	100	261	104	279	116	332	124	368	133	405	145	460	158	513	166	647	174	-	187	-
3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	116	300	124	350	133	400	145	500	158	600	166	680	174	730	187	-

Table 1 The transmittable torque with clamping connection consider the max. play of fit with shaft fit k6/F7 resp. H7. The torque decreases with larger play to fit.

Technical explanations

Selection of size, calculation of energy, torque adjustment for horizontal servo axes

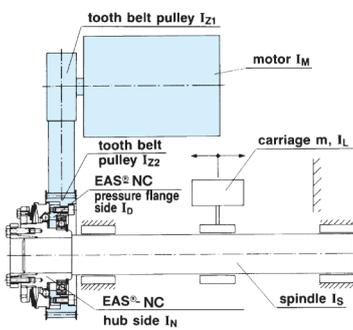


Fig. 1

$$I_g = I_M + I_{Z1} + (I_{Z2} + I_S + I_L) \cdot \left(\frac{n_2}{n_1}\right)^2$$

$$I_1 = I_D + I_{Z2} + (I_{Z1} + I_M) \cdot \left(\frac{n_1}{n_2}\right)^2$$

$$I_2 = I_N + I_S + I_L$$

I_L from equation (7)

Preselection of the clutch
M_{req.} = 1,5 · M₂ [Nm]
(M₂ from equation (4))

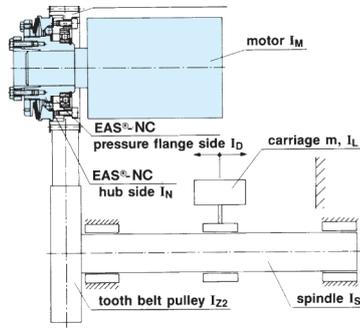


Fig. 2

$$I_g = I_M + I_{Z1} + (I_{Z2} + I_S + I_L) \cdot \left(\frac{n_2}{n_1}\right)^2$$

$$I_1 = I_M + I_N$$

$$I_2 = I_D + I_{Z1} + (I_{Z2} + I_S + I_L) \cdot \left(\frac{n_2}{n_1}\right)^2$$

I_L from equation (7)

Preselection of the clutch
M_{req.} = 1,5 · M₁ [Nm]

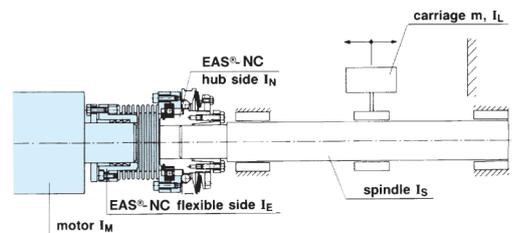


Fig. 3

$$I_g = I_M + I_{Ku} + I_S + I_L \quad [\text{kgm}^2] \quad (1)$$

$$I_1 = I_M + I_E \quad [\text{kgm}^2] \quad (2)$$

$$I_2 = I_N + I_S + I_L \quad [\text{kgm}^2] \quad (3)$$

I_L from equation (7)

Preselection of the clutch
M_{req.} = 1,5 · M₁ [Nm]

EAS[®]-NC ratchetting clutch/synchronous clutch

Torque at spindle

$$M_2 = M_1 \cdot \frac{n_1}{n_2} \quad [\text{Nm}] \quad (4)$$

Rate of feed of carriage

$$v = \frac{p \cdot n_2}{6 \cdot 10^4} \cdot \frac{m}{s} \quad (5)$$

Angular velocity of motor shaft ω_1 and spindle ω_2

$$\omega_1 = \frac{n_1 \cdot \pi}{30} \quad [\text{s}^{-1}]; \quad \omega_2 = \frac{n_2 \cdot \pi}{30} \quad [\text{s}^{-1}] \quad (6)$$

Mass of carriage reduced to the spindle

$$I_L = m \cdot \frac{v^2}{\omega_2^2} \quad [\text{kgm}^2] \quad (7)$$

v from equation (5), ω_2 from equation (6)

Energy with collision without EAS[®]-NC clutch

$$W_g = \frac{1}{2} \cdot I_g \cdot \omega_1^2 \quad [\text{J}] \quad (8)$$

I_g from equation (1), ω_1 from equation (6)

Energy with collision with EAS[®]-NC clutch

$$W_2 = \frac{1}{2} \cdot I_2 \cdot \omega_2^2 \quad [\text{J}] \text{ for arrangement as shown in fig. 1} \quad (9)$$

$$W_2 = \frac{1}{2} \cdot I_2 \cdot \omega_2^2 \quad [\text{J}] \text{ for arrangement as shown in figs. 2+3} \quad (9)$$

I_2 from equation (3), ω_1 and ω_2 from equation (6)

Remaining residual energy

$$W_R = \frac{W_2}{W_g} \cdot 100 \quad [\%] \quad (10)$$

W_g from equation (8), W_2 from equation (9)

Uncoupled energy

$$\Delta W = W_g - W_2 \quad [\text{J}] \quad (11)$$

$$\Delta W = 100 - W_R \quad [\%] \quad (12)$$

W_g from equation (8), W_2 from equation (9)

W_R from equation (10)

Designations:

I_g [kgm ²]	total mass moment of inertia without EAS [®] -NC clutch related to the motor shaft
I_1 [kgm ²]	mass moment of inertia at the input side related to the shaft with the EAS [®] -NC clutch
I_2 [kgm ²]	mass moment of inertia at the output side (spindle side) related to the shaft with the EAS [®] -NC clutch
I_M [kgm ²]	mass moment of inertia of the motor
I_{Z1} [kgm ²]	mass moment of inertia of the tooth belt pulley at the motor side
I_{Z2} [kgm ²]	mass moment of inertia of the second tooth belt pulley
I_S [kgm ²]	mass moment of inertia of the spindle
I_L [kgm ²]	mass of the carriage reduced to the spindle
I_N [kgm ²]	mass moment of inertia of the EAS [®] -NC, hub side
I_D [kgm ²]	mass moment of inertia of the EAS [®] -NC, pressure flange side
I_E [kgm ²]	mass moment of inertia of the EAS [®] -NC, flexible coupling
I_{Ku} [kgm ²]	mass moment of inertia of the two-shaft-connection before installing the EAS [®] -NC clutch
M_1 [Nm]	nominal torque of the motor
M_2 [Nm]	torque on the spindle
M_B [Nm]	max. torque of the motor
M_A [Nm]	required disengaging torque in the acceleration phase

Required disengaging torque in the acceleration phase (axis horizontal)

$$M_A = M_B \cdot \frac{I_2}{I_2 + I_1} \cdot \frac{n_1}{n_2} \cdot * \quad [\text{Nm}] \quad (13)$$

I_1 from equation (2), I_2 from equation (3)

* speed ratio $\frac{n_1}{n_2}$ is not valid for figures 2 and 3.

Required disengaging torque in acceleration phase (axis aligned by choice)

$$\text{application acc. } M_A = \left(M_B \cdot \frac{n_1}{n_2} - M_L \right) \cdot \frac{I_2}{I_2 + I_1} + M_L \quad [\text{Nm}] \text{ to fig. 1}$$

$$\text{application acc. } M_A = \left(M_B - M_L \cdot \frac{n_2}{n_1} \right) \cdot \frac{I_2}{I_2 + I_1} + M_L \cdot \frac{n_2}{n_1} \quad [\text{Nm}] \text{ to fig. 2} \quad (14)$$

$$\text{application acc. } M_A = \left(M_B - M_L \right) \cdot \frac{I_2}{I_2 + I_1} + M_L \quad [\text{Nm}] \text{ to fig. 3}$$

M_L from equation (15)

Load torque from carriage mass with any alignment

$$M_L = \frac{m \cdot g \cdot \sin \alpha \cdot p}{2 \cdot \pi \cdot 1000} \quad [\text{Nm}] \quad (15)$$

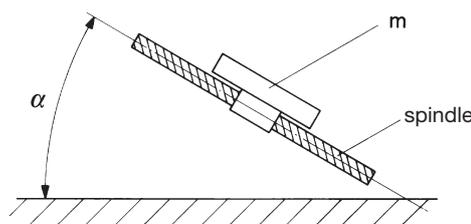


Fig. 4

Setting of the limiting torque

$$M_G = 1,5 \cdot M_1 \quad [\text{Nm}] \text{ (arrangement as shown in figure 2)} \quad (16)$$

$$M_G = 1,5 \cdot M_2 \quad [\text{Nm}] \text{ (arrangement as shown in figs. 1 + 3)}$$

M_2 from equation (4)

Condition: The disengaging torque M_A , from equation (13) or (14) must be smaller than the torque M_G adjusted at the clutch (multiplied with the factor 1,2).

M_G [Nm]	limiting torque for an overload
M_L [Nm]	load torque from carriage mass with any alignment
g [$\frac{m}{s^2}$]	acceleration of fall
m [kg]	mass of the carriage
n_1 [rpm]	drive speed of the motor (fast motion)
n_2 [rpm]	speed of the spindle (fast motion)
p [mm]	ascent of the spindle
v [$\frac{m}{s}$]	rate of the feed of carriage
W_g [J]	total energy in the case of a collision without EAS [®] -NC clutch
W_2 [J]	energy in the case of a collision with EAS [®] -NC clutch
W_R [%]	remaining residual energy
ΔW [J]	uncoupled energy
ΔW [%]	uncoupled energy
ω_1 [s ⁻¹]	angular velocity of the motor shaft
ω_2 [s ⁻¹]	angular velocity of the spindle

Calculation example

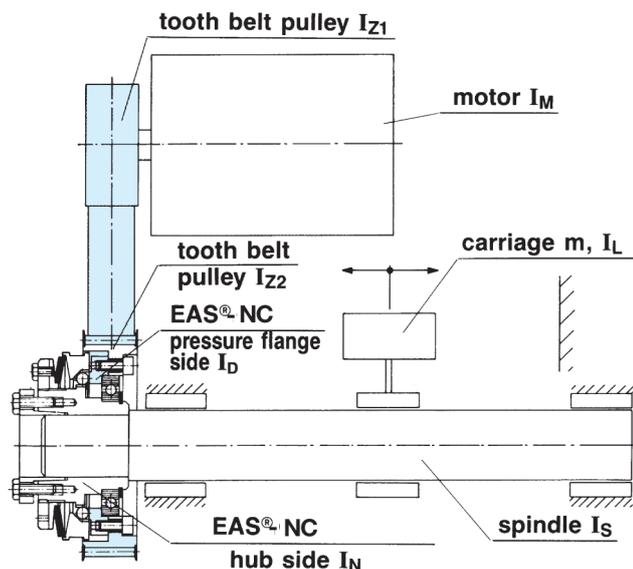


Fig. 1

Arrangement as shown in figure 1.

Indications:

mass of the carriage	$m = 560 \text{ kg}$
mass moment of inertia of the motor	$I_M = 0,0037 \text{ kgm}^2$
mass moment of inertia of the tooth belt pulleys	$I_{Z1} = 0,0006 \text{ kgm}^2$
	$I_{Z2} = 0,01132 \text{ kgm}^2$
mass moment of inertia of the spindle	$I_S = 0,00067 \text{ kgm}^2$
drive speed of the motor	$n_1 = 2000 \text{ rpm}$
speed of the spindle	$n_2 = 1000 \text{ rpm}$
ascent of the spindle	$p = 10 \text{ mm}$
nominal torque of the motor	$M_1 = 14 \text{ Nm}$
max. torque of the motor	$M_B = 40 \text{ Nm}$

Preselection of the clutch

$$M_{\text{req.}} = 1,5 \cdot M_2; \quad M_2 = M_1 \cdot \frac{n_1}{n_2} = 14 \text{ Nm} \cdot \frac{2000 \text{ rpm}}{1000 \text{ rpm}} = \mathbf{28 \text{ Nm}}$$

$$M_{\text{req.}} = 1,5 \cdot 28 \text{ Nm} = \mathbf{42 \text{ Nm}}$$

Selected: EAS[®]-NC size 1, Type 450.610.0
torque range $M_G = 30 \div 72 \text{ Nm}$
(see technical data, page 10)

Mass moment of inertia of the EAS[®]-NC

hub side	$I_N = 0,00120 \text{ kgm}^2$ (see techn. data, page 10)
pressure flange side	$I_D = 0,00039 \text{ kgm}^2$ (see techn. data, page 10)

Rate of feed of carriage

$$v = \frac{p \cdot n_2}{6 \cdot 10^4} = \frac{10 \cdot 1000}{6 \cdot 10^4} \text{ m/s} = \mathbf{0,1667 \text{ m/s}}$$

Angular velocity of the motor shaft ω_1 and spindle ω_2

$$\omega_1 = \frac{n_1 \cdot \pi}{30} = \frac{2000 \cdot \pi}{30} \text{ s}^{-1} = \mathbf{209 \text{ s}^{-1}}$$

$$\omega_2 = \frac{n_2 \cdot \pi}{30} = \frac{1000 \cdot \pi}{30} \text{ s}^{-1} = \mathbf{104,7 \text{ s}^{-1}}$$

Mass of carriage reduced to the spindle

$$-I_L = m \cdot \frac{v^2}{\omega_2^2} = 560 \cdot \frac{0,1667^2}{104,7^2} \text{ kgm}^2 = \mathbf{0,00142 \text{ kgm}^2}$$

Energy in the case of a collision without EAS[®]-NC clutch

$$I_g = I_M + I_{Z1} + (I_{Z2} + I_S + I_L) \cdot \left(\frac{n_2}{n_1}\right)^2 =$$

$$= 0,0037 + 0,0006 + (0,01132 + 0,00067 + 0,00142) \cdot \left(\frac{1000}{2000}\right)^2 =$$

$$= \mathbf{0,00765 \text{ kgm}^2}$$

$$W_g = 1/2 \cdot I_g \cdot \omega_1^2 = 1/2 \cdot 0,00765 \cdot 209^2 \text{ J} = \mathbf{167 \text{ J}}$$

Energy in the case of a collision with EAS[®]-NC clutch

$$I_2 = I_N + I_S + I_L = 0,00120 + 0,00067 + 0,00142 \text{ kgm}^2 =$$

$$= \mathbf{0,00329 \text{ kgm}^2}$$

$$W_2 = 1/2 \cdot I_2 \cdot \omega_2^2 = 1/2 \cdot 0,00329 \cdot 104,7^2 \text{ J} = \mathbf{18 \text{ J}}$$

Remaining residual energy

$$W_R = \frac{W_2}{W_g} \cdot 100 = \frac{18}{167} \cdot 100 = \mathbf{10,8 \%}$$

Uncoupled energy

$$\Delta W = W_g - W_2 = 167 \text{ J} - 18 \text{ J} = \mathbf{149 \text{ J}}$$

$$\Delta W = 100 - W_R = 100 - 10,8 = \mathbf{89,2 \%}$$

Required disengaging torque in the acceleration phase

$$I_1 = I_D + I_{Z2} + (I_{Z1} + I_M) \cdot \left(\frac{n_1}{n_2}\right)^2 =$$

$$= 0,00039 + 0,01132 + (0,0006 + 0,0037) \cdot \left(\frac{2000}{1000}\right)^2 =$$

$$= \mathbf{0,0289 \text{ kgm}^2}$$

$$M_A = M_B \cdot \frac{I_2}{I_2 + I_1} \cdot \frac{n_1}{n_2} = 40 \cdot \frac{0,00329}{0,00329 + 0,0289} \cdot \frac{2000}{1000} = \mathbf{8,2 \text{ Nm}}$$

Setting of the limiting torque

$$M_G = 1,5 \cdot M_2 = 1,5 \cdot 28 \text{ Nm} = \mathbf{42 \text{ Nm}}$$

The disengaging torque $1,2 \cdot M_A = 1,2 \cdot 8,2 \text{ Nm} = 9,84 \text{ Nm}$ is less than the set limiting torque $M_G = 42 \text{ Nm}$.

Technical Explanations

Indicated torque adjustment

The EAS[®]-NC torque limiting clutch offers the comfort of the indicated torque adjustment at the adjusting nut (not for sizes 02/03). The possibility for indication offers a substantially simplified torque adjustment and a simple monitoring of the set releasing value with an installed clutch.

- The limiting torque can be adjusted sensitively and indicated exactly by the fine pitch threaded graduated adjusting nut.
- The positive locking of the adjusting nut protects against self-acting unintended adjustment of the pre-set limiting torque. For EAS[®]-NC sizes 4–6 additional mechanical locking against blocking and backtwisting.

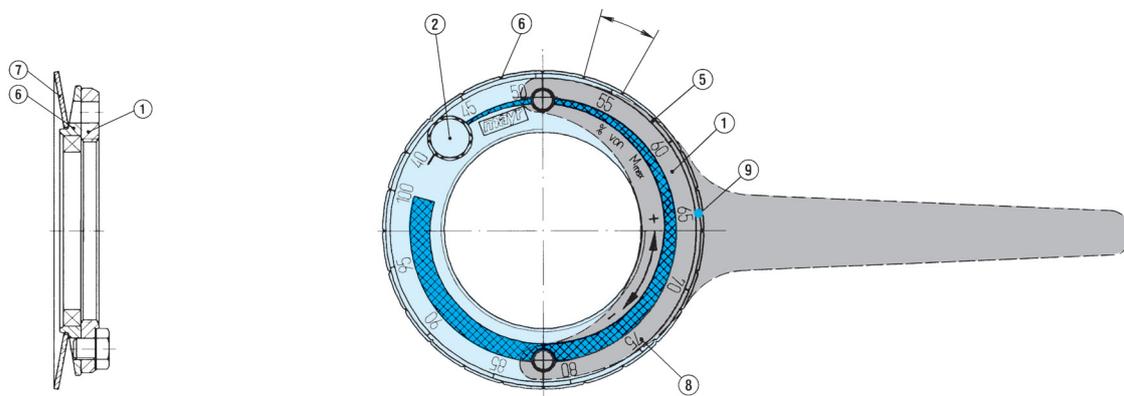


Fig. 1

Important Note!

Depending on the kind of drive and drive constellation torque peaks (e. g. due to impact of the starting torque in case of asynchronous motors, load impacts, static friction or similar) can occur in the drive shaft which are clearly over the operating torque of the equipment (motor).

The customer has to consider the behaviour for the design or adjustment of the clutch.

Torque adjustment

The adjustment is made by turning the adjusting nut. The cup springs operate in the negative area of their characteristics (see figure 2). A stronger pre-tension of the cup springs effects a decrease of the spring pressure. Turning the adjusting nut in a clockwise direction reduces the torque, and in anti-clockwise direction increases the torque (viewed in the direction of the nut - figure 1).

EAS[®]-NC sizes 01–6 are adjusted **generally** at approx. 70%–75% of the corresponding max. torque and marked (calibrated) at the factory, if no other torque adjustment is required.

EAS[®]-NC sizes 03+02 must be adjusted as per the included adjusting diagrams, if there is no adjustment or calibration made at the factory.




Fig. 2




Fig. 3

Torque adjustment by the aid of the adjusting diagram

- Grease thread and contact faces of the adjusting nut, retaining ring and hub.
- Manually screw on adjusting nut (1) until contact is made with the cup springs (7).
- Continue turning until the 4 graduations (5) at the circumference of the adjusting nut (1) and the notches in the retaining ring (6) are in line with each other.
- Using a face wrench, turn the adjusting nut (1) through the number of graduations corresponding to the required torque (fig. 3) (number of graduations as per setting diagram).
- The graduations at the circumference of the adjusting nut (5) and retaining ring (6) must remain in the same position.
- Put Loctite 242 onto the retaining screw (2) and screw it into the adjusting nut (1).

Attention!!

After dismantling the clutch (e.g. by changing the cup springs or cup spring layers) the clutch must be re-adjusted.

Adjusting the torque

Remove the retaining screw (2) (for sizes 4–6, 4 setscrews) from the adjusting nut.

Turn adjusting nut clockwise or anti-clockwise with the use of a face wrench according to the engraved graduation (for sizes 03 and 02 setting diagram) until the required torque is set. The required torque is achieved when the graduation in the retaining ring and the indication on the percentage in the adjusting nut (for sizes 03 and 02 from the graduations on the adjusting diagram) are overlapped. Afterwards the retaining screw or setscrew, respectively (locking by Loctite 242) are screwed into the adjusting nut again, whereby the 4 graduations in the adjusting nut and retaining ring must remain in the same position.

Example:

Existing adjustment 65% of the max. torque.
The customer requires 90% of the max. torque.

Turn adjusting nut anti-clockwise, as described above, until 90% of the graduation are in line with the notches in the retaining ring. If necessary, the alignment of the notches at the circumference of the adjusting nut must be overlapped with the graduations of the retaining ring.



Application

This device is used to monitor mechanical movements and end positions. It is a controlling sensor for electronic and mechanical sequences. It also registers axial disengaging movements, e.g. on EAS[®]-clutches.

Function

The pre-tensioned contact is discharged by actuating the switching lever: Contacts 11-14 (21-24) open, contacts 11-12 (21-22) close.

Design

The microswitch is fitted into a light metal housing and is actuated by a switching lever. Operation is only possible in one direction.


The limit switch is fixed using M4 cap screws via two screw-on mounting links attached diagonally.




Technical Data

Contact	1 changeover contact (special design: 2 changeover contacts)
Switching capacity	250 VAC / 15 A (with 2 contacts: 10A) 24 VDC / 6 A 60 VDC / 1,5 A 250 VDC / 0,2 A min. 12 VDC/10 mA
Contact material	AgCdO 90/10
Switching frequency	Max. 200 switching operations/min
Ambient temperature	-10 °C up to +85 °C
Protection	IP 54
Weight	275 g
Switching path setting	Using the adjusting screw (SW 7), the zero point can be moved right or left by max. 5 mm
Switching path	Advance travel: min. 0,15 to 0,5 mm Overtravel: max. 10 mm, depending on the zero point setting
Special Types	Different control lever lengths as well as a design with 2 changeover contacts are possible on request

Dimensions (mm)

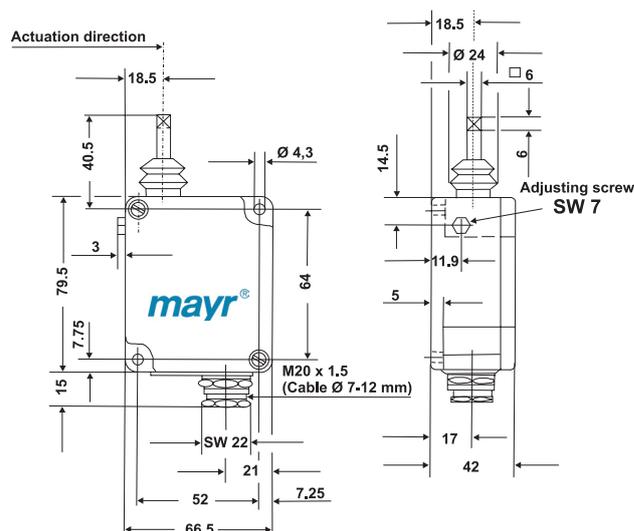

Electrical Connection

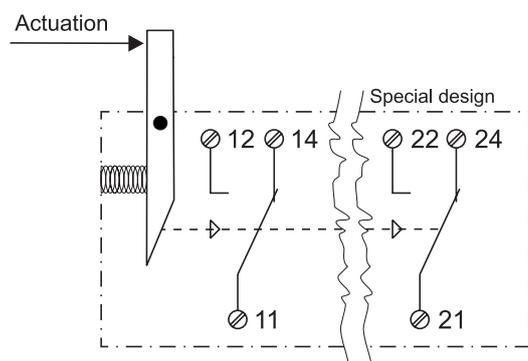

Order Example

To be stated on order:	Type
Order number	055.000.5

Limit switch Type 055.00_.5 (Contactless)

Application

This device is used for measuring and monitoring axial and radial disengaging movements, e.g. on EAS[®]-clutches. It acts as a control sensor for electronic and mechanical sequences.

Function

When the sensor surface of the NAMUR sensor scans a metal control flag (damped), the signal relay is triggered, is de-energised and drops. Contacts 1 - 2 are opened. Damping is possible from all sides.

Electrical Connection (Terminal)

1 - 2 - 3 Potential-free two-way contact
5 - 6 Connection input voltage

Design

The electronic amplifier is installed in a light metal housing. The limit switch is fixed using two screw-on mounting links attached diagonally with M4 cap screws.

Technical Data

Input voltage 230 VAC, ±10 %, 50-60 Hz
 (dependent on design) 115 VAC, ±10 %, 50-60 Hz
 24 VDC, PELV, ±5 %, protected
 against reverse polarity, for overvoltage
 category II connection

Power consumption max. 1,5 VA

Ambient temperature -10 °C up to +60 °C limit switch
 -25 °C up to +60 °C NAMUR sensor

Protection IP 54

Conductor cross section max. 2,5 mm² / AWG 14

Weight 400 g / 14 oz

Protection fuse 0,1 A / fast acting at 24 VDC (in system)

Signalling relay Potential-free two-way contacts
 Contact load max. 250 VAC/12 A
 Contact material AgNi 90/10
 Max. frequency of operating cycles
 20 Hz at min. load,
 0,1 Hz at max. load

NAMUR sensor internal Installed in a light metal housing,
 operating distance SN 2 mm, flush
 fitting, max. frequency of operating
 cycles 2 kHz, the zero point can be
 set per 1 mm by means of the lateral
 adjusting screw (SW 7).

NAMUR sensor external metal housing M12 x 1, operating
 distance SN 2 mm, flush fitting, max.
 frequency of operating cycles 2 kHz,
 standard cable length 2 m, max. 100m
 with special design, Protection IP 67


Order example:

To be stated on order:	Type	Connected voltage
Order number:	055.00_.5	---


Contactless sensing	↑	230 VAC
Sensor external 1	→	115 VAC
Sensor internal 2	→	24 VDC



Dimensions (internal NAMUR sensor)

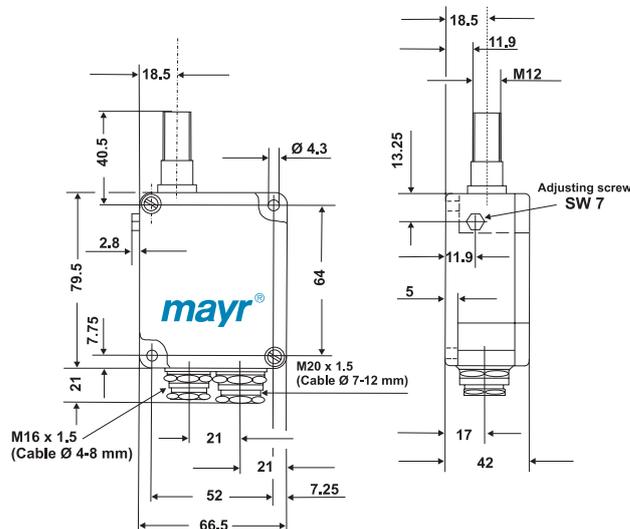

Dimensions (external NAMUR sensor)

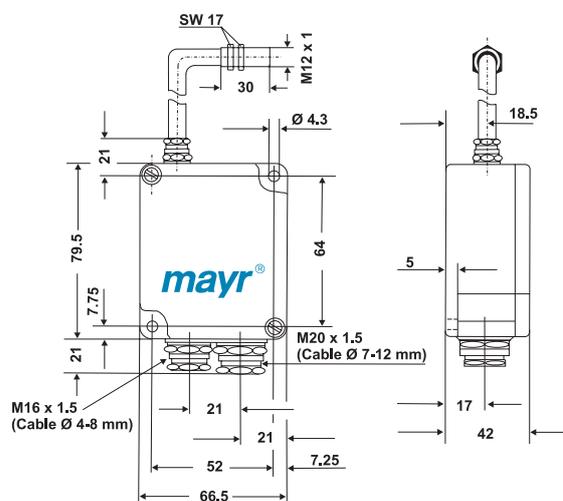

Application

The limit switch is used to monitor and measure axial or radial mechanical movements and adjustments e.g. on EAS[®]-clutches. The device is suitable for clutches with a minimum stroke of 1,1 mm with radial actuation and 0,9 mm with axial actuation.

Function

By actuating the metal tappet, contacts 11 – 12 are opened.


Electrical Connection (Terminals)

11 – 12 NC contact

Technical Data

Contact	1 x NC contact, forced disconnection contacts \ominus
Contact (special design)	additional 1 x NO contact, terminals 23 – 24, galvanically separated (Zb)
Contact-opening	see switching travel diagram
Contact-closing	see switching travel diagram
Contact load	NC contact 250 VAC/2,5 A 24 VDC/1 A min. 12 VDC/10 mA
Contact distance 250 VAC	>1,25 mm
Contact distance 24 VDC	<1,25 mm, min. 0,5 mm
Contact material	Ag90Ni10
Max. input current	acc. to DIN EN 60947-5-1 AC15/DC13
Metal tappet travel	max. 4 mm axial or radial
Switching frequency	max. 100/Min.
Mechanical lifetime	1 x 10 ⁶ switching cycles, unloaded
Conductor cross section	1,5 mm ² / AWG 16
Ambient temperature	-30 °C up to +80 °C
Protection	IP 65
Protection insulation	acc. to protection class II \square
Housing	thermoplastic, self extinguishing acc. to UL94-V0
Weight	120 g / 4.2 oz

Installation

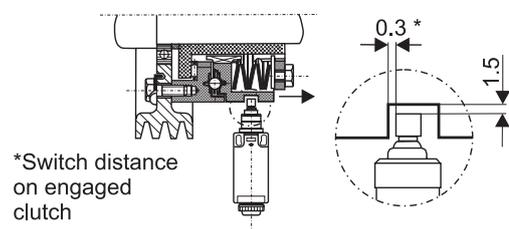


Order Example

To be stated on order:	Type
Order number	055.010.6




Dimensions (mm)

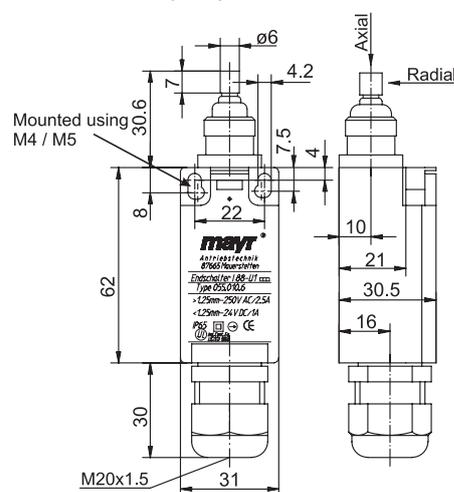

Fixed positioning for safety application with fixing screws 2 x M5 (DIN 921).

Switching Travel Diagram

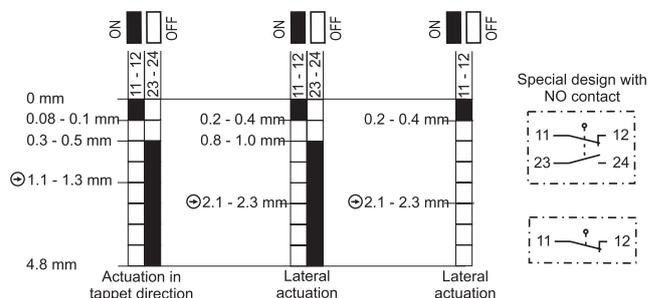

Warning! Do not install switch so that it drags and observe max. actuation travel (travel of metal tappet)

Worldwide representation

Headquarters
Chr. Mayr
GmbH + Co. KG
Eichenstraße 1
87665 Mauerstetten
Tel.: 49-83 41/8 04-241
Fax: 49-83 41/804422
info@mayr.de
http://www.mayr.de

Great Britain
Mayr Transmissions Ltd.
Valley Road,
Business Park
Keighley, BD21 4LZ
West Yorkshire
Tel.: 0 15 35/66 39 00
Fax: 0 15 35/66 32 61
sales@mayr.co.uk

Italy
Mayr Italia S.r.l.
Viale Veneto, 3
35020 Saonara (PD)
Tel.: 0 49/8 79 10 20
Fax: 0 49/8 79 10 22
info@mayr-italia.it

France
Mayr France S.A.
Z.A.L. du Minopole
BP 16
62160 Bully-Les-Mines
Tel.: 03.21.72.91.91
Fax: 03.21.29.71.77
contact@mayr.fr

Switzerland
Mayr Kupplungen AG
Tobelackerstrasse 11
8212 Neuhausen
am Rheinfall
Tel.: 0 52/6 74 08 70
Fax: 0 52/6 74 08 75
info@mayr.ch


USA
Mayr Corporation
4 North Street
Waldwick
NJ 07463
Tel.: 2 01/4 45-72 10
Fax: 2 01/4 45-80 19
info@mayrcorp.com

Singapore
Mayr Transmission (S)
No. 8 Boon Lay Way
Unit 03-06, TradeHub 21
Singapore 609964
Tel.: 0065/6560 1230
Fax: 0065/6560 1000
info@mayr.com.sg

China
Mayr Shanghai
Room 608, No. 1277
West Zhongshan Road,
Conch Building,
200051 Shanghai, China
Tel.: 021/62953138
Fax: 021/62953137
sales@mayr.com.cn

Korea
Mayr Korea
60-11, Woongnam-Dong
ROK Changwon
Rep. of Korea
Tel.: 055/262-4024
Fax: 055/262-4025
info@mayrkorea.com

Japan
Sumitomo HI-PTC
Sales Co., Ltd.
3-5-8, Kandakaji-Cho,
Chiyoda-Ku
Tokyo J101-0045
Tel.: 03/52563091
Fax: 03/52563098
Gotou.k@sumiju.co.jp

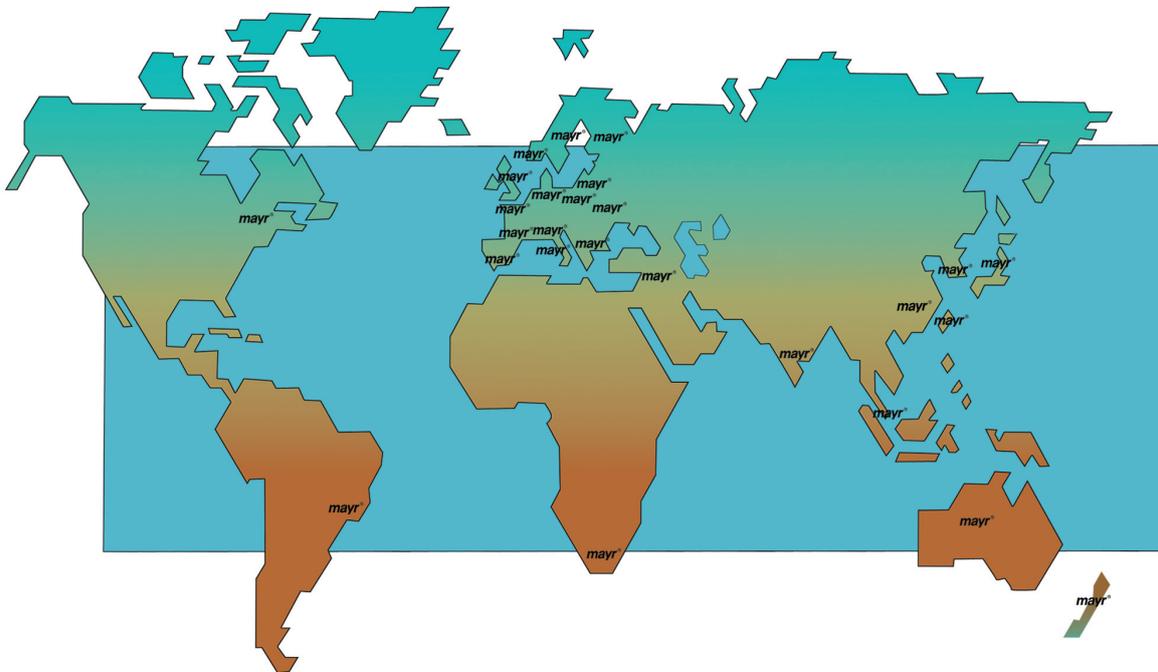

Taiwan
German Tech Auto Co. Ltd.
No. 58, Wu Chuan Road
Wu-Ku Industrial Park
Taipei Hsien, Taiwan
Tel.: 02/2299 0237
Fax: 02/2299 0239
steve@zfgta.com.tw

India
National Engineering
Company (NENCO)
J-225, M.I.D.C. Bhosari
Pune 411 026
Tel.: 0202/7 47 45 29
Fax: 0202/7 47 02 29
nenco@vsnl.com

Australia
Transmission Australia Pty. Ltd.
22 Corporate Ave,
3178 Rowville, Victoria
Australien
Tel.: 039/755 4444
Fax: 039/755 4411
info@transaus.com.au

South Africa
Torque Transfer
Private Bag 9
Elandsfontein 1406
Tel.: 011/3458000
Fax: 011/9740524
torque@bearings.co.za

**Machine Tool
Applications in China**
DTC. Co.Ltd.,
Block 5th, No. 1699,
East Zhulu Road,
201700 Shanghai, China
Tel.: 021/59883978
Fax: 021/59883979
dtschanghai@online.sh.cn

Austria	Hongkong	Poland	Turkey
Benelux States	Hungary	Romania	
Brazil	Indonesia	Russia	
Canada	Israel	Slovakia	
Czech Republic	Malaysia	Slovenia	
Denmark	New Zealand	Spain	
Finland	Norway	Sweden	
Greece	Philippines	Thailand	

Note:
If a country is not
shown, please refer to
headquarters or
our web site to be
advised of the
nearest responsible
agent.

mayr[®]
your reliable partner

Product Summary



Safety Clutches/ Overload Clutches

- **EAS[®]-Compact[®]/EAS[®]-NC**
Positive locking and completely backlash-free torque limiting clutches
- **EAS[®]-smartic[®]**
Cost-effective torque limiting clutches, quick installation
- **EAS[®]-element clutch/EAS[®]-elements**
Load-disconnecting protection against high torques
- **EAS[®]-axial**
Exact limitation of tensile and compressive forces
- **EAS[®]-Sp/EAS[®]-Sm/EAS[®]-Zr**
Load-disconnecting torque limiting clutches with switching function
- **ROBA[®]-slip hub**
Load holding, frictionally locked torque limiting clutches
- **ROBA[®]-contitorque**
Magnetic continuous slip clutches

Shaft Couplings

- **smartflex[®]**
Perfect precision couplings for servo and stepping motors
- **ROBA[®]-ES**
Backlash-free and damping for vibration-sensitive drives
- **ROBA[®]-DS/ROBA[®]-D**
Backlash-free, torsionally rigid all-steel couplings
- **EAS[®]-control-DS**
Cost-effective torque-measuring couplings-

Electromagnetic Brakes/Clutches

- **ROBA-stop[®] standard**
Multifunctional all-round safety brakes
- **ROBA-stop[®]-M motor brakes**
Robust, cost-effective motor brakes
- **ROBA-stop[®]-S**
Water-proof, robust monoblock brakes
- **ROBA-stop[®]-Z/ROBA-stop[®]-silenzio[®]**
Doubly safe elevator brakes
- **ROBA[®]-diskstop[®]**
Compact, very quiet disk brakes
- **ROBA[®]-topstop[®]**
Brake systems for gravity loaded axes
- **ROBA[®]-linearstop**
Backlash-free brake systems for linear motor axes
- **ROBATIC[®]/ROBA[®]-quick/ROBA[®]-takt**
Electromagnetic clutches and brakes, clutch brake units

DC Drives

- **tendo[®]-PM**
Permanent magnet-excited DC motors
- **tendo[®]-SC**
1 quadrant and 4 quadrant transistor controllers



Chr. Mayr GmbH + Co. KG
Eichenstrasse 1
D-87665 Mauerstetten
Germany

Telephon 083 41/804-241
Telefax 083 41/804 422
<http://www.mayr.de>
eMail: info@mayr.de

mayr[®]
your reliable partner

16/04/2007 IM