






Simplex chains

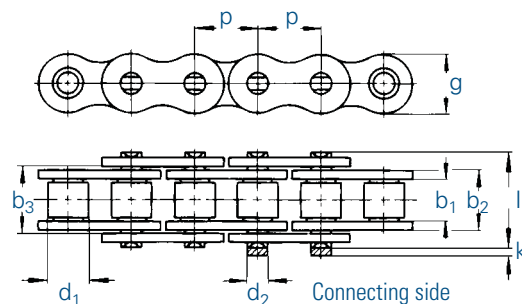

Duplex chains

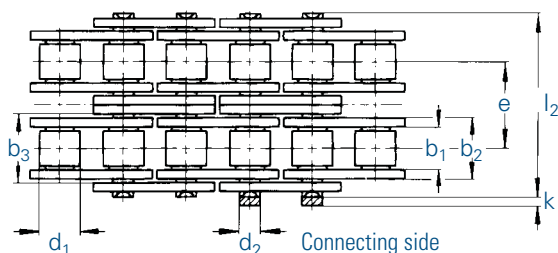

Triplex chains

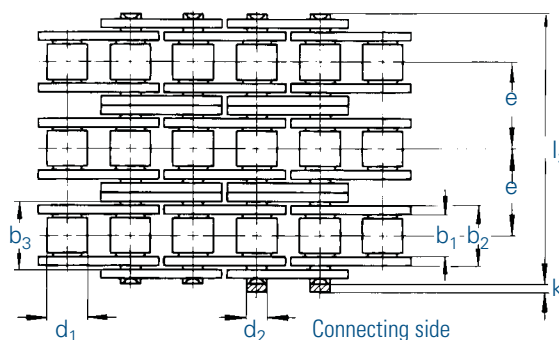

| Chain | | Pitch | | Inner width | Inner link width | Outer plate width | Roller Ø | Pin Ø | Transverse pitch | Plate height | Projection over connecting link | Width over pin | Bearing area | Minimum tensile strength | Weight | Connecting links |
|-----------|--------------|--------|-------|---------------------|---------------------|---------------------|---------------------|---------------------|------------------|--------------|---------------------------------|----------------|--------------|--------------------------|--------|------------------|
| No. | | mm | inch | b ₁ min. | b ₂ max. | b ₃ min. | d ₁ max. | d ₂ max. | e | g max. | k max. | l max. | f | F _B min. | q ≈ | No. |
| 06 B-1 MA | ¹ | 9,525 | 3/8 | 5,72 | 8,53 | 8,66 | 6,35 | 3,28 | - | 8,2 | 3,3 | 13,5 | 0,28 | 9,6 | 0,41 | 11,12,15 |
| 08 B-1 MA | | 12,7 | 1/2 | 7,75 | 11,30 | 11,43 | 8,51 | 4,45 | - | 11,8 | 3,9 | 17,0 | 0,50 | 18,6 | 0,70 | 11,12,15 |
| 10 B-1 MA | | 15,875 | 5/8 | 9,65 | 13,28 | 13,41 | 10,16 | 5,08 | - | 14,7 | 4,1 | 19,6 | 0,67 | 27,0 | 0,91 | 11,12,15 |
| 12 B-1 MA | | 19,05 | 3/4 | 11,68 | 15,62 | 15,75 | 12,07 | 5,72 | - | 16,1 | 4,6 | 22,7 | 0,89 | 31,0 | 1,18 | 11,12,15 |
| 16 B-1 MA | | 25,4 | 1 | 17,02 | 25,40 | 25,60 | 15,88 | 8,28 | - | 21,0 | 5,4 | 36,1 | 2,10 | 72,0 | 2,68 | 11,111,12 |
| 552 MA | | 30,0 | - | 17,02 | 25,40 | | 15,88 | 8,28 | - | 21,0 | 5,4 | 36,1 | 2,10 | 72,0 | 2,50 | 11,111,12 |
| 20 B-1 MA | | 31,75 | 1 1/4 | 19,56 | 29,00 | 29,20 | 19,05 | 10,19 | - | 26,4 | 6,1 | 43,2 | 2,96 | 105,0 | 3,50 | 111,12 |
| 24 B-1 MA | | 38,1 | 1 1/2 | 25,40 | 37,90 | 38,20 | 25,40 | 14,63 | - | 33,4 | 6,6 | 53,4 | 5,54 | 180,0 | 6,80 | 111,12 |
| 06 B-2 MA | | 9,525 | 3/8 | 5,72 | 8,53 | 8,66 | 6,35 | 3,28 | 10,24 | 8,2 | 3,3 | 23,8 | 0,56 | 17,4 | 0,78 | 11,12,15 |
| 08 B-2 MA | | 12,7 | 1/2 | 7,75 | 11,30 | 11,43 | 8,51 | 4,45 | 13,92 | 11,8 | 3,9 | 31,0 | 1,01 | 37,0 | 1,36 | 11,12,15 |
| 10 B-2 MA | | 15,875 | 5/8 | 9,65 | 13,28 | 13,41 | 10,16 | 5,08 | 16,59 | 14,7 | 4,1 | 36,2 | 1,34 | 54,0 | 1,82 | 11,12,15 |
| 12 B-2 MA | | 19,05 | 3/4 | 11,68 | 15,62 | 15,75 | 12,07 | 5,72 | 19,46 | 16,1 | 4,6 | 42,2 | 1,79 | 63,0 | 2,38 | 11,12,15 |
| 16 B-2 MA | | 25,4 | 1 | 17,02 | 25,40 | 25,60 | 15,88 | 8,28 | 31,88 | 21,0 | 5,4 | 68,0 | 4,21 | 140,0 | 5,30 | 11,111,12 |
| 20 B-2 MA | | 31,75 | 1 1/4 | 19,56 | 25,40 | 29,20 | 19,05 | 10,19 | 36,45 | 26,4 | 6,1 | 79,0 | 5,91 | 210,0 | 7,30 | 111,12 |
| 24 B-2 MA | | 38,1 | 1 1/2 | 25,40 | 37,90 | 38,20 | 25,40 | 14,63 | 48,36 | 33,4 | 6,6 | 101,0 | 11,09 | 360,0 | 13,40 | 111,12 |
| 06 B-3 MA | | 9,525 | 3/8 | 5,72 | 8,53 | 8,66 | 6,35 | 3,28 | 10,24 | 8,2 | 3,3 | 34,0 | 0,81 | 24,9 | 1,18 | 11,12,15 |
| 08 B-3 MA | | 12,7 | 1/2 | 7,75 | 11,30 | 11,43 | 8,51 | 4,45 | 13,92 | 11,8 | 3,9 | 44,9 | 1,51 | 56,0 | 2,01 | 11,12,15 |
| 10 B-3 MA | | 15,875 | 5/8 | 9,65 | 13,28 | 13,41 | 10,16 | 5,08 | 16,59 | 14,7 | 4,1 | 52,8 | 2,02 | 80,0 | 2,70 | 11,12,15 |
| 12 B-3 MA | | 19,05 | 3/4 | 11,68 | 15,62 | 15,75 | 12,07 | 5,72 | 19,46 | 16,1 | 4,6 | 61,7 | 2,68 | 94,0 | 3,12 | 11,12,15 |
| 16 B-3 MA | | 25,4 | 1 | 17,02 | 25,40 | 25,60 | 15,88 | 8,28 | 31,88 | 21,0 | 5,4 | 99,9 | 6,31 | 211,0 | 7,50 | 11,111,12 |
| 20 B-3 MA | | 31,75 | 1 1/4 | 19,56 | 29,00 | 29,20 | 19,05 | 10,19 | 36,45 | 26,4 | 6,1 | 116,0 | 8,87 | 300,0 | 10,60 | 111,12 |
| 24 B-3 MA | | 38,1 | 1 1/2 | 25,40 | 37,90 | 38,20 | 25,40 | 14,63 | 48,36 | 33,4 | 6,6 | 150,0 | 16,63 | 523,0 | 20,00 | 111,12 |

¹ with straight side plates

Standard sprockets can be used for these chains.