




# WIPPERMANN

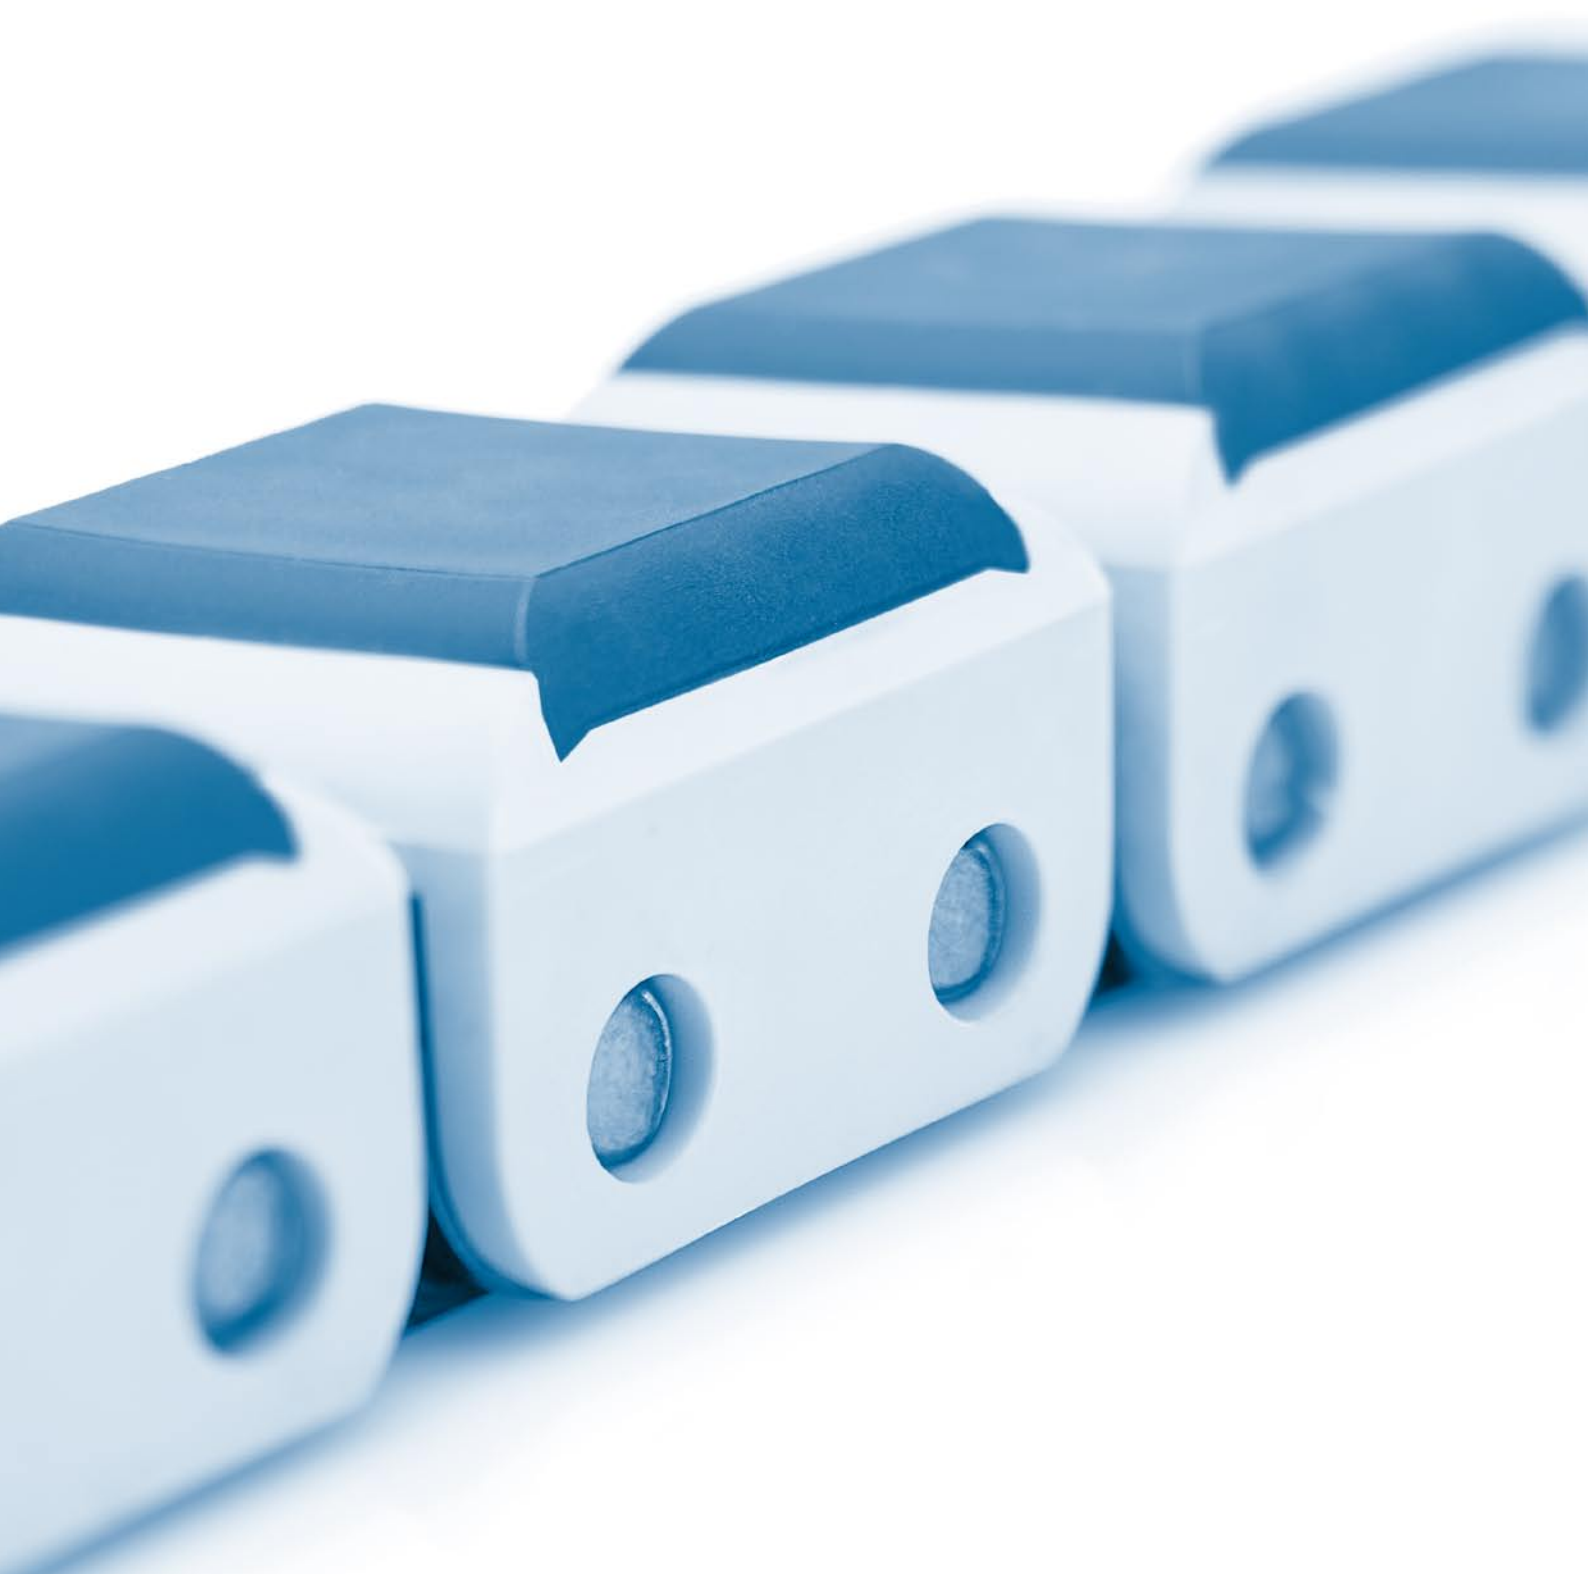

## POM-Clips with top surface TPU


CAREFUL CONVEYING  
OF SENSITIVE GOODS ON TPU






## POM-CLIPS WITH TOP SURFACE TPU



Careful conveying of sensitive goods on TPU

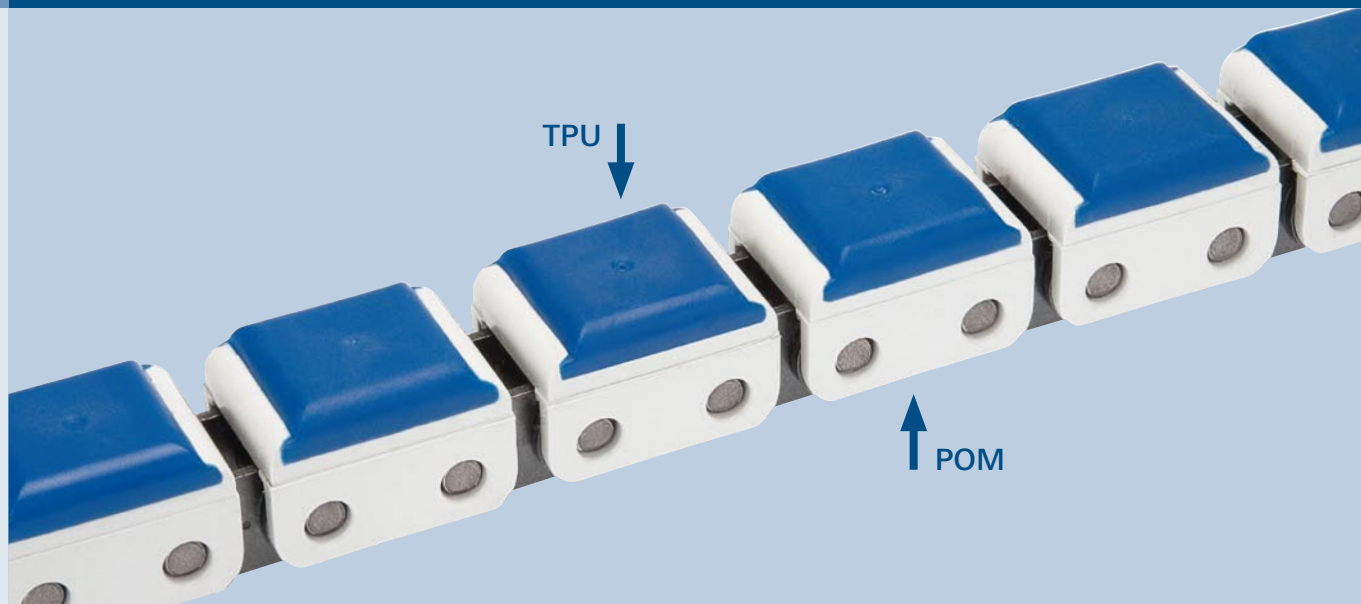

### POM-clip with top surface TPU




- for chain 462GL, 513GL, 548 GLS including MARATHON and SS
- basic clip POM, top surface TPU (85 Shore A)
- protect sensitive goods from damage by the chain
- no edge pressure at transfer points (see picture)
- high coefficient of friction between clip and conveyed good
- high load capacity
- easy assembly and replacement
- mounting of connecting links with POM-clip and without spring clip

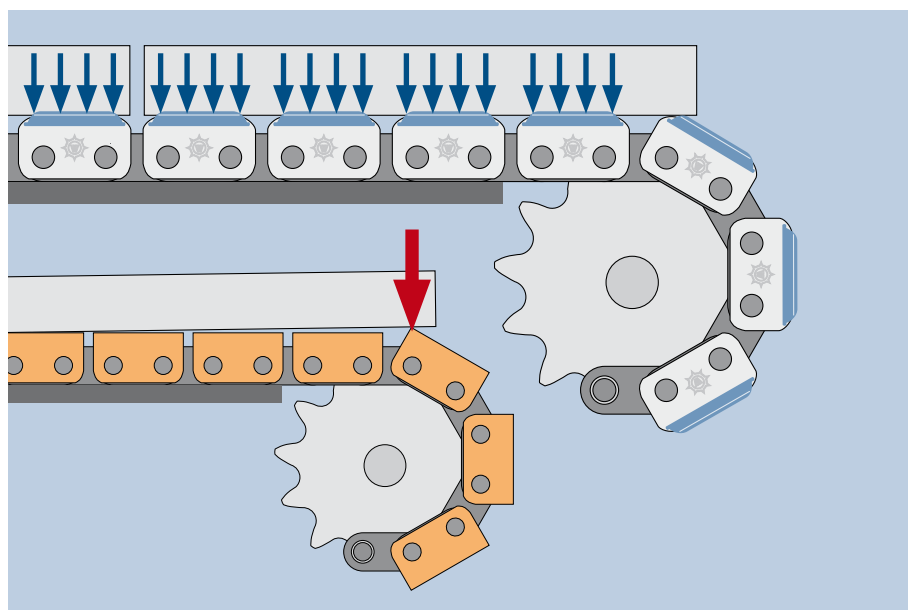

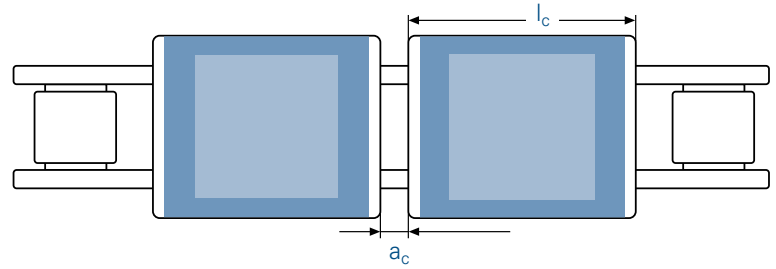

Chain			Plate height						max. vertical load per clip
⚙		DIN	g	a <sub>c</sub>	b <sub>c</sub>	b <sub>min</sub>	h <sub>c</sub>	l <sub>c</sub>	
No.	Ind.	No.	mm	mm	mm	mm	mm	mm	kg
462 GL		08 B-1	11,5	3,4	19,5	22	13	21,9	70
513 GL		12 B-1	15,5	3,9	25,4	28	20	34,2	110
548 GLS		16 B-1	21,0	5,1	41,0	45	22	45,9	140

Assembly of the clips at room temperature (> 15°C)

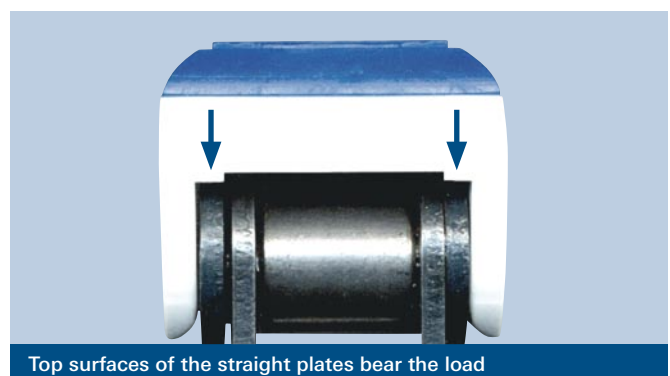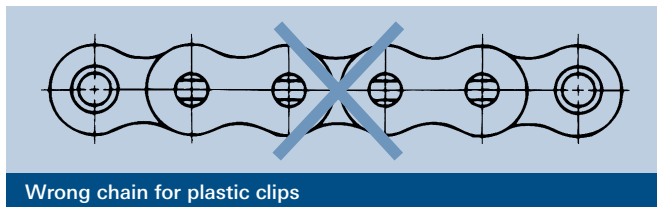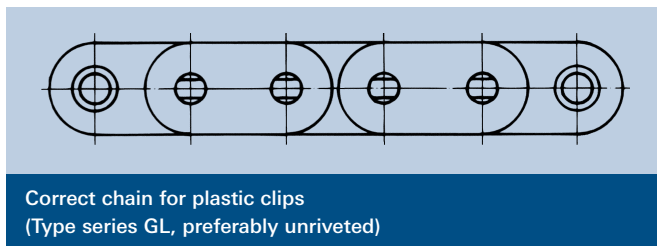

### POM-clip with top surface TPU

- POM-clip: stiff, durable, impact resistant
- TPU-top: 85 Shore A
- perfect junction between POM-clip and TPU-top
- high friction, high abrasion resistance
- max. sustained temperature 80°C
- resistant against most oils and greases
- low danger of hydrolysis

Address

Wippermann jr. GmbH  
Delsterner Straße 133  
58091 Hagen, Germany

Postfach 4020  
58040 Hagen, Germany

Phone

+49 (0) 23 31 - 78 2 - 0

Fax

+49 (0) 23 31 - 78 2 - 3 5 6

Homepage

[www.wippermann.com](http://www.wippermann.com)

E-mail

[info@wippermann.com](mailto:info@wippermann.com)