



WIPPERMANN



MARATHON Stainless Steel

STAINLESS STEEL AND MAINTENANCE-FREE CHAIN





MARATHON STAINLESS STEEL - MAINTENANCE-FREE


Stainless steel and maintenance-free chain



High performance polymer bearing TRIGLEIT




High performance polymer bearing TRIGLEIT Z

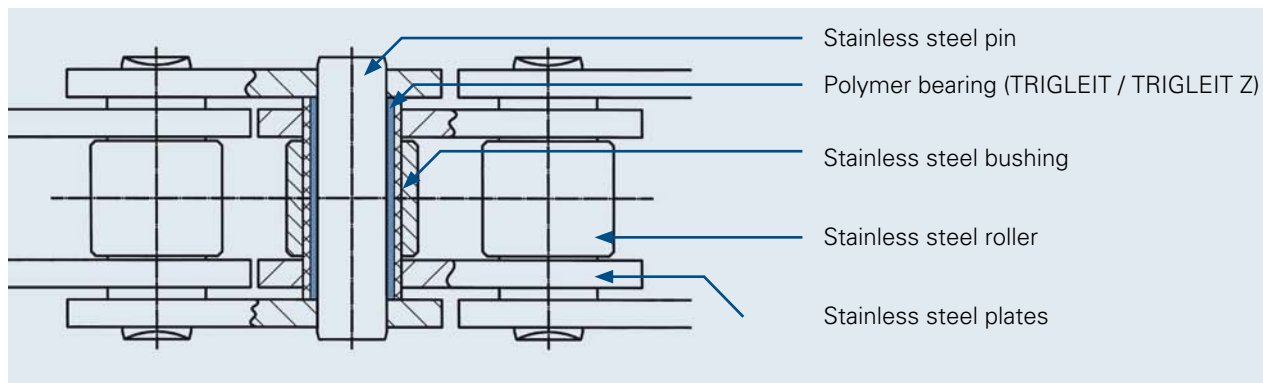

High performance polymer bearings allow operation of stainless steel chains without relubrication!



- durable and low-friction polymer bearing
- all other chain components made of stainless steel grades
- maximum chain speed $v = 2,5$ m/s
- working temperature -30°C to $+60^{\circ}\text{C}$ (TRIGLEIT)
- working temperature -100°C to $+200^{\circ}\text{C}$ (TRIGLEIT Z)
- chain dimensions according to DIN 8187; standard stainless steel sprockets can be used
- no relubrication required
- relubrication with mineral oils possible (no ester oils)
- can also be supplied with extended pins, straight attachments, bent attachments and in special designs
- information on chemical resistance on request
- durable water resistance (TRIGLEIT Z)

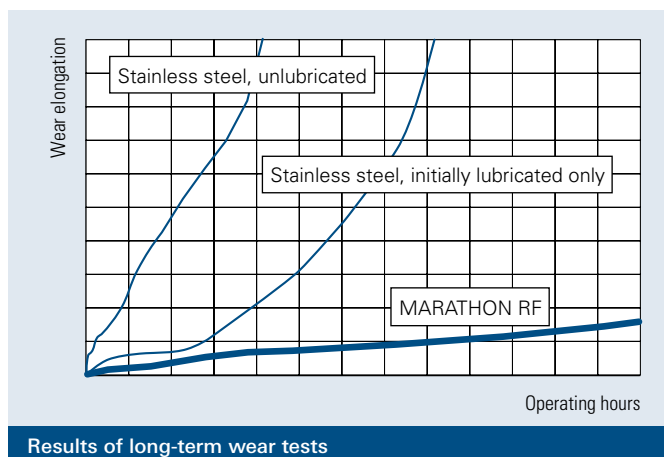


Application areas:


- Packing industry
- Chemical industry
- Pharmaceutical industry
- Textile industry
- Food industry
- Sanitation industry
- Electrical industry




Simplex chains

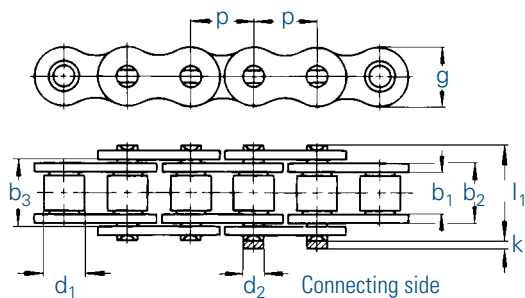


Simplex chains (Type GL)

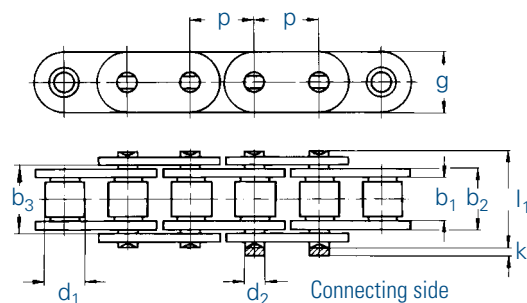

Duplex chains

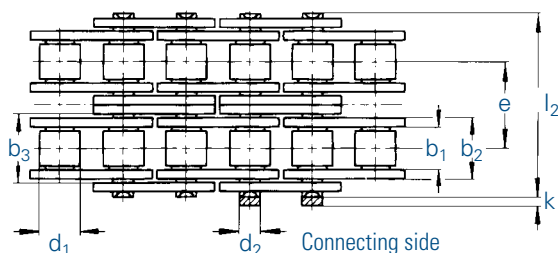


Triplex chains

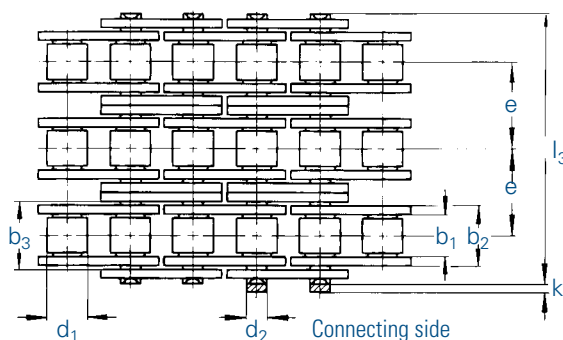

Chain		DIN	Pitch		Inner width	Inner link width	Outer plate width	Roller Ø	Pin Ø	Transverse pitch	Plate height	Projection over connecting link	Width over pin	Bearing area	Minimum tensile strength	Weight	Connecting links
No.	Ind.		p		b ₁ min.	b ₂ max.	b ₃ min.	d ₁ max.	d ₂ max.	e	g max.	k max.	l max.	f	F _B min.	q ≈	No.
462 RF MA		08 B-1	12,7	1/2	7,75	11,30	11,43	8,51	4,45	-	11,8	3,9	17,0	0,50	12,00	0,70	4,7,11,12,15
501 RF MA		10 B-1	15,875	5/8	9,65	13,28	13,41	10,16	5,08	-	14,7	4,1	19,6	0,67	14,50	0,91	4,7,11,12,15
513 RF MA		12 B-1	19,05	3/4	11,68	15,62	15,75	12,07	5,72	-	16,1	4,6	22,7	0,89	18,50	1,18	4,7,11,12,15
548 RF MA		16 B-1	25,4	1	17,02	25,40	25,60	15,88	8,28	-	21,0	5,4	36,1	2,10	40,00	2,50	4,7,11,12
D 462 RF MA		08 B-2	12,7	1/2	7,75	11,30	11,43	8,51	4,45	13,92	11,8	3,9	31,0	1,01	20,40	1,36	4,7,11,12,15
D 501 RF MA		10 B-2	15,875	5/8	9,65	13,28	13,41	10,16	5,08	16,59	14,7	4,1	36,2	1,34	24,65	1,82	4,7,11,12,15
D 513 RF MA		12 B-2	19,05	3/4	11,68	15,62	15,75	12,07	5,72	19,46	16,1	4,6	42,2	1,79	31,45	2,38	4,7,11,12,15
D 548 RF MA		16 B-2	25,4	1	17,02	25,40	25,60	15,88	8,28	31,88	21,0	5,4	68,0	4,21	68,00	5,10	4,7,11,12
T 462 RF MA		08 B-3	12,7	1/2	7,75	11,30	11,43	8,51	4,45	13,92	11,8	3,9	44,9	1,51	32,50	2,01	4,7,11,12,15
T 501 RF MA		10 B-3	15,875	5/8	9,65	13,28	13,41	10,16	5,08	16,59	14,7	4,1	52,8	2,02	39,00	2,70	4,7,11,12,15
T 513 RF MA		12 B-3	19,05	3/4	11,68	15,62	15,75	12,07	5,72	19,46	16,1	4,6	61,7	2,68	49,50	3,12	4,7,11,12,15
T 548 RF MA		16 B-3	25,4	1	17,02	25,40	25,60	15,88	8,28	31,88	21,0	5,4	99,9	6,31	108,00	7,50	4,7,11,12

Can also be supplied with attachments, straight plates (type series GL) and as double pitch roller chains (dimensions according to DIN 8181). Chains 548 available as type series GLS with plate height g=21 mm (max.) and as type series GL with g=24 mm (max.). Sprockets on request.

Connecting links: According to DIN (...)

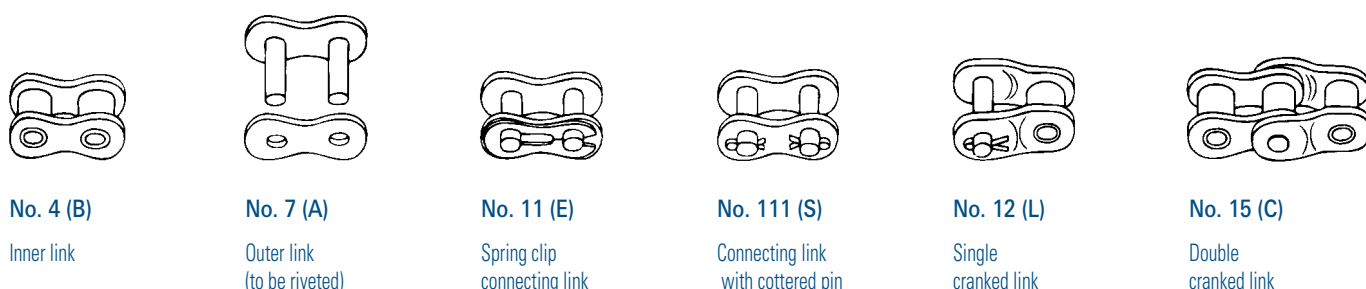

Address

Wippermann jr. GmbH
Delsterner Straße 133
58091 Hagen, Germany

Postfach 4020
58040 Hagen, Germany

Phone

+49 (0) 23 31 - 78 2 - 0

Fax

+49 (0) 23 31 - 78 2 - 3 5 6

Homepage

www.wippermann.com

E-mail

info@wippermann.com

